

Massively Multilingual Neural Machine Translation in the Wild: Findings and Challenges

Naveen Arivazhagan * Ankur Bapna * Orhan Firat *

Dmitry Lepikhin Melvin Johnson Maxim Krikun Mia Xu Chen Yuan Cao
George Foster Colin Cherry Wolfgang Macherey Zhifeng Chen Yonghui Wu

Google AI

Abstract

We introduce our efforts towards building a universal neural machine translation (NMT) system capable of translating between any language pair. We set a milestone towards this goal by building a single massively multilingual NMT model handling 103 languages trained on over 25 billion examples. Our system demonstrates effective transfer learning ability, significantly improving translation quality of low-resource languages, while keeping high-resource language translation quality on-par with competitive bilingual baselines. We provide in-depth analysis of various aspects of model building that are crucial to achieving quality and practicality in universal NMT. While we prototype a high-quality universal translation system, our extensive empirical analysis exposes issues that need to be further addressed, and we suggest directions for future research.

1 Introduction

Sequence-to-sequence neural models (seq2seq) (Kalchbrenner and Blunsom, 2013; Sutskever et al., 2014; Cho et al., 2014; Bahdanau et al., 2014) have been widely adopted as the state-of-the-art approach for machine translation, both in the research community (Bojar et al., 2016a, 2017, 2018b) and for large-scale production systems (Wu et al., 2016; Zhou et al., 2016; Crego et al., 2016; Hassan et al., 2018). As a highly expressive and abstract framework, seq2seq models can be trained to perform several tasks simultaneously (Luong et al., 2015), as exemplified by multilingual NMT (Dong et al., 2015; Firat et al.,

2016a; Ha et al., 2016c; Johnson et al., 2017) - using a single model to translate between multiple languages.

Multilingual NMT models are appealing for several reasons. Let’s assume we are interested in mapping between N languages; a naive approach that translates between any language pair from the given N languages requires $O(N^2)$ individually trained models. When N is large, the huge number of models become extremely difficult to train, deploy and maintain. By contrast, a multilingual model, if properly designed and trained, can handle all translation directions within a single model, dramatically reducing the training and serving cost and significantly simplifying deployment in production systems.

Apart from reducing operational costs, multilingual models improve performance on low and zero-resource language pairs due to joint training and consequent positive transfer from higher-resource languages (Zoph et al., 2016; Firat et al., 2016b; Nguyen and Chiang, 2017; Johnson et al., 2017; Neubig and Hu, 2018; Aharoni et al., 2019; Escolano et al., 2019; Arivazhagan et al., 2019; Hokamp et al., 2019). Unfortunately, this simultaneously results in performance degradation on high-resource languages due to interference and constrained capacity (Johnson et al., 2017; Tan et al., 2019). Improving translation performance across the board on both high and low resource languages is an under-studied and challenging task.

While multilingual NMT has been widely studied, and the above benefits realized, most approaches are developed under constrained settings; their efficacy is yet to be demonstrated in real-world scenarios. In this work, we attempt to study multilingual neural machine translation *in the wild*, using a massive open-domain dataset

* Equal contribution. Correspondence to navari, ankurbpn, orhanf@google.com

containing over 25 billion parallel sentences in 103 languages.

We first survey the relevant work in various areas: vocabulary composition, learning techniques, modeling and evaluation. In each area, we identify key determinants of performance and assess their impact in our setting. The result is a map of the landscape on this still largely unexplored frontier of natural language processing (NLP) and machine learning (ML). To the best of our knowledge, this is the largest multilingual NMT system to date, in terms of the amount of training data and number of languages considered at the same time. Based on experiments centered around different aspects of multilingual NMT we highlight key challenges and open problems on the way to building a real-world massively multilingual translation system.

2 Towards Universal Machine Translation

Enabling a single model to translate between an arbitrary language pair is the ultimate goal of universal MT. In order to reach this goal, the underlying machinery, *the learner*, must model a massively multi-way input-output mapping task under strong constraints: a huge number of languages, different scripting systems, heavy data imbalance across languages and domains, and a practical limit on model capacity. Now let us take a look at the problem from a machine learning perspective.

Machine learning algorithms are built on inductive biases in order to enable better generalization (Mitchell, 1997). In the setting of multilingual NMT, the underlying inductive bias is that *the learning signal from one language should benefit the quality of other languages* (Caruana, 1997). Under this bias, the expectation is that as we increase the number of languages, the learner will generalize better due to the increased amount of information¹ added by each language (or task). This positive transfer is best observed for low-resource languages (Zoph et al., 2016; Firat et al., 2016a; Neubig and Hu, 2018). Unfortunately the above mentioned constraints prevent these gains

¹Which can be sharing of semantic and/or syntactic structure, or ease of optimization via shared error signals etc.

from being progressively applicable: as we increase the number of languages with a fixed model capacity², the positive/negative transfer boundary becomes salient, and high resource languages start to regress due to a reduction in per-task capacity.

From a function of mapping perspective, there are three common categories of multilingual NMT models in the literature, depending on the languages covered on the source and target sides: many-to-one, one-to-many and many-to-many models (Dong et al., 2015; Firat et al., 2016a; Johnson et al., 2017). Many-to-one multilingual NMT models learn to map any of the languages in the source language set into the selected target language, usually chosen to be English due to the easy availability of parallel corpora with English on one side. Similarly, one-to-many multilingual NMT models aim to translate a single source language into multiple target languages. Many-to-one multilingual NMT can be categorized as a multi-domain³ learning problem (Dredze et al., 2010; Joshi et al., 2012; Nam and Han, 2015), where the task of translating into a selected language remains the same, but the input distribution is different across source languages (Arivazhagan et al., 2019). On the other hand, one-to-many multilingual NMT can be considered a multi-task problem (Caruana, 1997; Thrun and Pratt, 1998; Dong et al., 2015), where each source-target pair is a separate task. Many-to-many translation is the super-set of both these tasks. Regardless of the number of languages considered on the source or the target side, **improvements in multilingual NMT are expected to arise from positive transfer between related domains and transferable tasks.**

Multi-domain and multi-task learning across a very large number of domains/tasks, with wide data imbalance, and very heterogeneous inter-task relationships arising from dataset noise and topic/style discrepancies, differing degrees of linguistic similarity, etc., make the path towards universal MT highly challenging. These problems are typically approached individually and in con-

²Loosely measured in terms of the number of free parameters for neural networks.

³Note that we use the machine learning notion of domain here where each domain refers to a particular distribution of the input, while the target distribution remain unchanged.

strained settings. Here we approach this challenge from the opposite end of the spectrum, determining what is possible with our current technology and understanding of NMT and ML, and probing for the effect of various design strategies in an extreme, real-world setting.

Our desired features of a truly multilingual translation model can be characterized as:

- Maximum throughput in terms of the number of languages considered within a single model.
- Maximum inductive (positive) transfer towards low-resource languages.
- Minimum interference (negative transfer) for high-resource languages.
- Robust multilingual NMT models that perform well in realistic, open-domain settings.

In the next sections we analyze different aspects of multilingual NMT, and investigate the implications of scaling up the dataset size and the number of languages considered within a single model. In each section we first discuss approaches described in recent literature, followed by our experimental setup, findings, and analysis. We also highlight some challenges and open problems identified in recent literature or as a result of our analyses. We start by describing our data setup, followed by an analysis of transfer and interference in the massively multilingual setting. We then analyze the pre-processing and vocabulary problems in multilingual NLP, discuss modeling approaches and the effect of increasing model capacity. We close with a discussion of evaluation and open problems in massively multilingual NMT.

3 Data and Baselines

As with any machine learning problem, the quality and the amount of the data has significant impact on the systems that can be developed (Goodfellow et al., 2016). Multilingual NMT is typically studied using various public datasets or combinations of them. The most commonly used datasets include: (i) TED talks (Cettolo et al., 2012) which includes 59 languages (Qi et al., 2018) with around 3k to 200k sentence pairs per

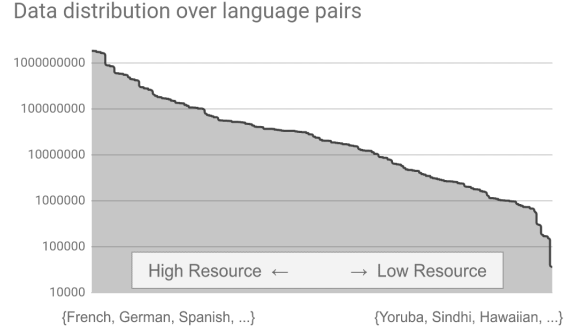


Figure 1: Per language pair data distribution of the training dataset used for our multilingual experiments. The x-axis indicates the language pair index, and the y-axis depicts the number of training examples available per language pair on a logarithmic scale. Dataset sizes range from 35k for the lowest resource language pairs to 2 billion for the largest.

language pair. (ii) European parliamentary documents (Koehn, 2005) which include versions in 21 European languages having 1M to 2M sentence pairs. (iii) The UNCorpus (Ziems et al., 2016) is another multilingual dataset of parliamentary documents of United Nations, consisting of around 11 million sentences in 6 languages. (iv) A compilation of the datasets used for the WMT News Translation shared task from 2005-19 (Bojar et al., 2016b, 2018a) covers a broader set of domains in around 15 languages, each containing between 10k to 50M sentence pairs. (v) Other smaller parallel corpora for specific domains are indexed by OPUS (Tiedemann, 2012) for various language pairs. (vi) The Bible corpus is perhaps the most multilingual corpus publicly available, containing 30k sentences in over 900 languages (Tiedemann, 2018).

The results of various works on these datasets have greatly contributed to the progress of multilingual NMT. However, methods developed on these datasets and the consequent findings are not immediately applicable to real world settings outside those datasets due to their narrow domains, the number of languages covered or the amount of training data used for training.

3.1 Our Data Setup

Our problem significantly extends those studied by these previous works: we study multilingual NMT on a massive scale, using an in-house corpus generated by crawling and extracting parallel sentences from the web (Uszkoreit et al., 2010). This corpus contains parallel documents for 102 languages, to and from English, containing a total of 25 billion sentence pairs.⁴ **The number of parallel sentences per language in our corpus ranges from around tens of thousands to almost 2 billion.** Figure 1 illustrates the data distribution across language pairs for all 204 language pairs we study. The following specifics of our dataset distinguish our problem from previous work on multilingual NMT:

- **Scale:** Even on our lowest resource languages we often exceed the amount of data available in a majority of the previously studied datasets. Given the amount of data, techniques developed in relatively low-resource setups may not be as effective.
- **Distribution:** The availability of quality parallel data follows a sharp power law, and data becomes increasingly scarce as we expand the scope of the system to more languages. There is a discrepancy of almost 5 orders of magnitude between our highest and our lowest resource languages. Balancing between these different language pairs now becomes a very challenging problem.
- **Domain and Noise:** Having been mined from the web, our dataset spans a vast range of domains. However, such web crawled data is also extremely noisy; this problem gets worse in the multilingual setting where the level of noise might be different across different languages. While clean sources of parallel data are also available, they are often limited to narrow domains and high resource languages.

To summarize, the training data used in our study is drawn from 102 languages (+ English),

⁴Limited to approximately this amount for experimentation.

exhibits a power-law in terms of number of training examples across language pairs, and spans a rich set of domains with varying noise levels—making our overall attempt as realistic as possible. Please see Table 8 in the Appendix for the full list of languages.

3.2 Experiments and Baselines

Throughout this paper we perform several experiments on the training dataset described above, to highlight challenges associated with different aspects of multilingual models. We first train dedicated bilingual models on all language pairs to ground our multilingual analyses. We perform all our experiments with variants of the Transformer architecture (Vaswani et al., 2017), using the open-source Lingvo framework (Shen et al., 2019). For most bilingual experiments, we use a larger version of Transformer Big (Chen et al., 2018a) containing around 375M parameters, and a shared source-target sentence-piece model (SPM) (Kudo and Richardson, 2018) vocabulary with 32k tokens. We tune different values of regularization techniques (e.g. dropout (Srivastava et al., 2014)) depending on the dataset size for each language pair. For most medium and low resource languages we also experiment with Transformer Base. All our models are trained with Adafactor (Shazeer and Stern, 2018) with momentum factorization, a learning rate schedule of (3.0, 40k),⁵ and a per-parameter norm clipping threshold of 1.0. For Transformer Base models, we use a learning rate schedule of (2.0, 8k), unless otherwise necessary for low-resource experiments.

In order to minimize confounding factors and control the evaluation set size and domain, we created our validation (development) and test sets as multi-way aligned datasets containing more than 3k and 5k sentence pairs respectively for all languages. For our bilingual baselines, BLEU scores are computed on the checkpoint with the best validation set performance, while we compute test BLEU on the final checkpoint (after training for around 1M steps) for our multilingual models, on true-cased output and references⁶. For all our

⁵(3.0, 40k) schedule is the shorthand for a learning rate of 3.0, with 40k warm-up steps for the schedule, which is decayed with the inverse square root of the number of training steps after warm-up.

⁶We used an in-house implementation of mteval-v13a.pl

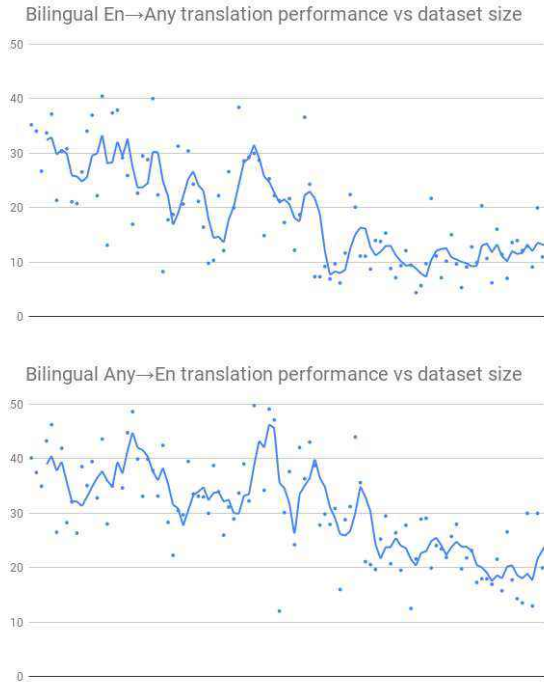


Figure 2: Quality (measured by BLEU) of individual bilingual models on all 204 supervised language pairs, measured in terms of BLEU (y-axes). Languages are arranged in decreasing order of available training data from left to right on the x-axes (pair ids not shown for clarity). Top plot reports BLEU scores for translating from English to any of the other 102 languages. Bottom plot reports BLEU scores for translating from any of the other 102 languages to English. Performance on individual language pairs is reported using dots and a trailing average is used to show the trend.

baselines we use a batch size of 1M tokens per batch, by using large scale data parallelism over 16 TPUv3 chips (Jouppi et al., 2017). We find that increasing the batch size offers noticeable improvements in model quality, while also significantly speeding up convergence.

We plot the BLEU scores for different language pairs in Figure 2. These results are also summarized in Table 1. For brevity, we plot two main directions separately in different plots. When the source language is in English and we are translating from English to any other language, $En \rightarrow Any$ is used for convenience, and similarly $Any \rightarrow En$ for the opposite directions. We notice from Moses to evaluate BLEU scores.

$En \rightarrow Any$	High 25	Med. 52	Low 25
Bilingual	29.34	17.50	11.72
$Any \rightarrow En$	High 25	Med. 52	Low 25
Bilingual	37.61	31.41	21.63

Table 1: Average translation quality (BLEU) of bilingual models over different groups of languages. High 25 refers to the top 25 languages by dataset size (left-most portion of Fig. 1), while low 25 refers to the bottom 25 (right-most portion of Fig. 1).

that translation performance on both $En \rightarrow Any$ and $Any \rightarrow En$ falls as the size of the training dataset decreases, as expected. In the next section we empirically analyze how multilingual models fare on the transfer-interference trade-off by using and comparing against the baselines introduced in this section.

4 Learning

Multilingual NMT is one of the largest multi-task problems being studied in academia or industry (Neubig and Hu, 2018; Aharoni et al., 2019), with hundreds of tasks (one per language pair) being learned in a single model. As is evident from Figure 1, multilingual NMT suffers from a severe data imbalance problem when studied in an unconstrained realistic setting.⁷ While there is an abundance of data for some language pairs, making it difficult to go through even a single epoch over the entire dataset before model convergence, low resource languages suffer from data scarcity, making learning difficult. To make things worse, these learning problems might have varying levels of learning ‘difficulty’ due to the linguistic properties of particular languages; designing a learning algorithm to train a single model on all of these tasks simultaneously is non-trivial.

In this section we will study the learning aspect of multilingual NMT, first examining the interaction between *transfer* and *interference* in our setup. Next, we will touch upon solutions to counter interference and lay out a set of future directions. And last, we will delve deeper into the

⁷The data-imbalance problem is also apparent in academic settings when multiple datasets are mixed, e.g. mixing TED talks with UN corpus.

transfer dynamics towards universal NMT.

4.1 Transfer and Interference

Multitask learning (Caruana, 1997) has been successfully applied to multiple domains, including NLP, speech processing, drug discovery and many others (Collobert and Weston, 2008; Deng et al., 2013; Ramsundar et al., 2015; Maurer et al., 2016; Ruder, 2017; Kaiser et al., 2017). Other problems closely related to multitask learning include zero or few-shot learning (Lake et al., 2011; Romera-Paredes and Torr, 2015; Vinyals et al., 2016; Pan and Yang, 2010), meta-learning and life-long learning (Thrun and Mitchell, 1995; Silver et al., 2013; Chen and Liu, 2016; Parisi et al., 2018; Golkar et al., 2019; Sodhani et al., 2018; Lopez-Paz et al., 2017). Although these learning paradigms make different assumptions about the underlying problem setting, they share the common goal of leveraging the inductive bias and regularization from a set of tasks to benefit another set of tasks. This inductive transfer could be parallel or sequential.

Multilingual NMT has been studied under many of these settings to various extents. Most existing literature deals with sequential transfer, where the goal is to leverage a set of high resource tasks that are already mastered, to improve the performance on a new (predominantly) low resource task (Zoph et al., 2016). We consider the parallel learning problem, where **the goal is to learn a single multi-task model trained concurrently on all tasks and hence is capable of performing all tasks simultaneously** once the training is accomplished.

In this section we investigate the effect of data imbalance across languages on these learning dynamics, particularly through the lens of *transfer* and *interference* (Caruana, 1997; Rosenstein et al., 2005). Reiterating from Section 2, two desired characteristics of our universal machine translation model are (1) maximum (positive) transfer to low-resource languages and (2) minimum interference (negative transfer) for high-resource languages. Now let us examine the interaction between variables considered. For the baseline experiment, we start by following common conventions in literature on multilingual NMT (Firat et al., 2017; Lee et al., 2017; Johnson et al.,

2017). We compare the performance of two training approaches against bilingual baselines following two strategies:

- (i) all the available training data is combined as it is, with the data distribution in Figure 1,
- (ii) we over-sample (up-sample) low-resource languages so that they appear with equal probability in the combined dataset.

In order to guide the translation with the intended target language, we pre-pend a target language token to every source sequence to be translated (Johnson et al., 2017). Further, to study the effect of *transfer* and *interference* at its limit, we shared a single encoder and decoder across all the language pairs. During training, mini-batches are formed by randomly sampling examples from the aggregated dataset following strategies (i) or (ii), as described above. We train a single Transformer-Big with a shared vocabulary of 64k tokens, all Transformer dropout options turned on with probability 0.1, and the same values as the bilingual baselines used for other hyperparameters. We use batch sizes of 4M tokens for all our multilingual models to improve the rate of convergence. All Transformer-Big runs utilize data parallelism over 64 TPUv3 chips. The results are depicted in Figure 3.

The performance of these two models highlights the trade-off between *transfer* and *interference*. If we sample equally from all datasets by over-sampling low-resource languages (strategy (ii)), we maximize transfer (right-most portion of Figure 3) and beat our bilingual baselines by large margins, especially in the *Any*→*En* direction. However, this also has the side-effect of significantly deteriorated performance on high resource languages (left-most portion of Figure 3). On the other hand, sampling based on the true data distribution (strategy (i)) retains more performance on high resource languages, at the cost of sacrificing performance on low resource languages. We also note that **the transfer-interference trade-off is more pronounced in the *Any*→*En* direction: the cost-benefit trade-off between low and high-resource languages is more severe than that for the *En*→*Any* direction.**

Another interesting finding is the performance deterioration on high resource languages when

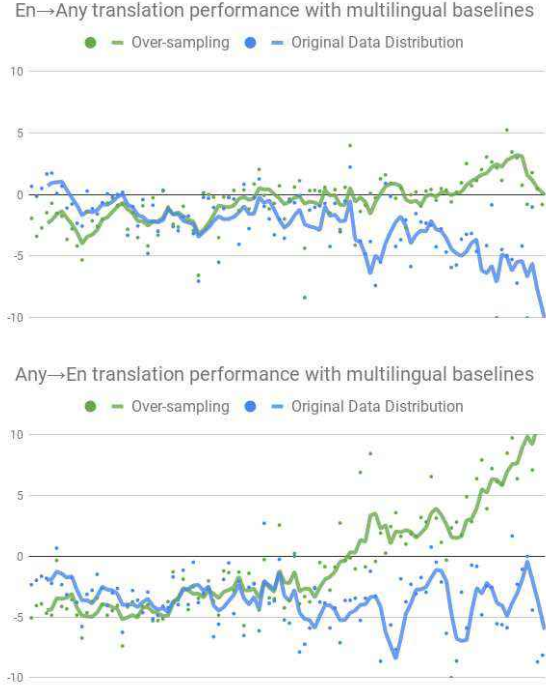


Figure 3: Effect of sampling strategy on the performance of multilingual models. From left to right, languages are arranged in decreasing order of available training data. While the multilingual models are trained to translate both directions, *Any*→*En* and *En*→*Any*, performance for each of these directions is depicted in separate plots to highlight differences. Results are reported relative to those of the bilingual baselines (2). Performance on individual language pairs is reported using dots and a trailing average is used to show the trend. The colors correspond to the following sampling strategies: (i) Blue: original data distribution, (ii) Green: equal sampling from all language pairs. Best viewed in color.

translating from *Any*→*En*, contrary to existing results in multilingual NMT (Firat et al., 2016a; Johnson et al., 2017), exaggerated by the limited model capacity and the scale and imbalance of our dataset. All these observations again underscore the difficulty in multitask learning, especially when hundreds of tasks are to be learned simultaneously, each of which may come from a different distribution. Although (Maurer et al., 2016) demonstrates the benefit of multitask learning when invariant features can be shared across all tasks, such a premise is not guaranteed when

hundreds of languages from different families are jointly considered.

4.2 Countering Interference: Baselines and Open Problems

The results in Figure 3 indicate that, in a large multi-task setting, high resource tasks are starved for capacity while low resource tasks benefit significantly from transfer, and the extent of interference and transfer are strongly related. However, this trade-off could be controlled by applying proper data sampling strategies.

To enable more control over sampling, we investigate batch balancing strategies (Firat et al., 2017; Lee et al., 2017), along the lines of the temperature based variant used for training multilingual BERT (Devlin et al., 2018). For a given language pair, l , let D_l be the size of the available parallel corpus. Then if we adopt a naive strategy and sample from the union of the datasets, the probability of the sample being from language l is $p_l = \frac{D_l}{\sum_k D_k}$. However, this strategy would starve low resource languages. To control the ratio of samples from different language pairs, we sample a fixed number of sentences from the training data, with the probability of a sentence belonging to language pair l being proportional to $p_l^{\frac{1}{T}}$, where T is the sampling temperature. As a result, $T = 1$ corresponds to true data distribution and $T = 100$ corresponds to (almost) equal number of samples for each language (close to a uniform distribution with over-sampled low-resource languages). Please see Figure 4 for an illustration of the effect of temperature based sampling overlaid on our dataset distribution.

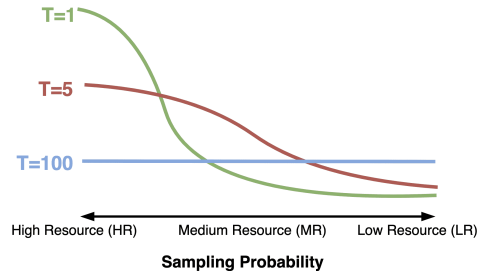


Figure 4: Temperature based data sampling strategies overlaid on the data distribution.

We repeat the experiment in Section 4.1 with temperature based sampling, setting $T = 5$ for

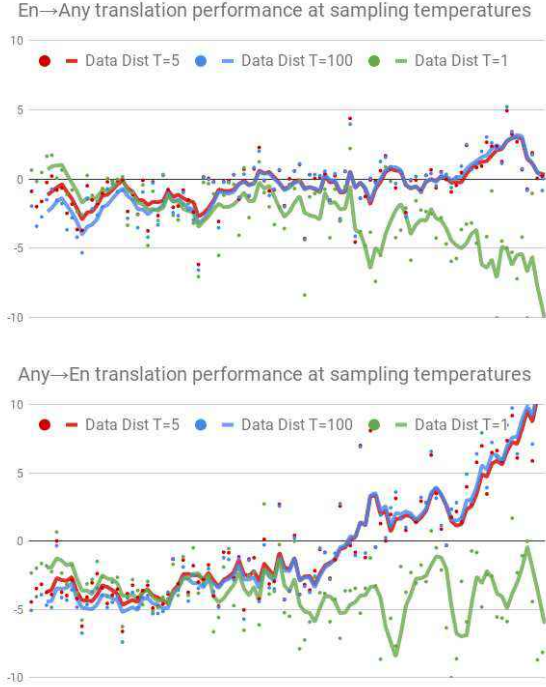


Figure 5: Effect of varying the sampling temperature on the performance of multilingual models. From left to right, languages are arranged in decreasing order of available training data. Results are reported relative to those of the bilingual baselines (2). Performance on individual language pairs is reported using dots and a trailing average is used to show the trend. The colors correspond to the following sampling strategies: (i) Green: True data distribution ($T = 1$) (ii) Blue: Equal sampling from all language pairs ($T = 100$) (iii) Red: Intermediate distribution ($T = 5$). Best viewed in color.

a balanced sampling strategy, and depict our results in Figure 5. Results over different language groups by resource size are also summarized in Table 2. We notice that the balanced sampling strategy improves performance on the high resource languages for both translation directions (compared to $T = 100$), while also retaining high transfer performance on low resource languages. However, performance on high and medium resource languages still lags behind their bilingual baselines by significant margins.

We unveiled one of the factors responsible for interference while training massively multilingual NMT models under heavy dataset imbalance, and

$En \rightarrow Any$	High 25	Med. 52	Low 25
Bilingual	29.34	17.50	11.72
$T=1$	28.63	15.11	6.24
$T=100$	27.20	16.84	12.87
$T=5$	28.03	16.91	12.75
$Any \rightarrow En$	High 25	Med. 52	Low 25
Bilingual	37.61	31.41	21.63
$T=1$	34.60	27.46	18.14
$T=100$	33.25	30.13	27.32
$T=5$	33.85	30.25	26.96

Table 2: Average translation quality (BLEU) of multilingual models using different sampling temperatures, over different groups of languages. High 25 refers to the top 25 languages by dataset size, while low 25 refers to the bottom 25.

hinted that an appropriate data sampling strategy can potentially mitigate the interference. But the imbalance in dataset across tasks is not the only variable interacting with the *transfer - interference* dilemma. In all the experiments described above, multilingual models have the same capacity as the baselines, a strategy which could be interpreted as reducing their per-task capacity. To highlight the exacerbating effect of interference with increasing multilinguality, we train three additional models on a growing subset of 10, 25, and 50 languages. The specific languages are chosen to get a mixed representation of data size, script, morphological complexity and inter-language relatedness. Results for the 10 languages, with a data sampling strategy $T = 5$, that are common across all subsets are reported in Figure 6 and clearly highlight how **performance degrades for all language pairs, especially the high and medium resource ones, as the number of tasks grows**.

While simple data balancing/sampling strategies might reduce the effects of interference without reducing transfer, our experiments also highlight a few research directions worth further exploration. Most notably, Should we be using the same learning algorithms for multilingual and single language pair models? Can we still rely on data-sampling heuristics when the number of tasks are excessively large? We highlight a few open problems along these lines:

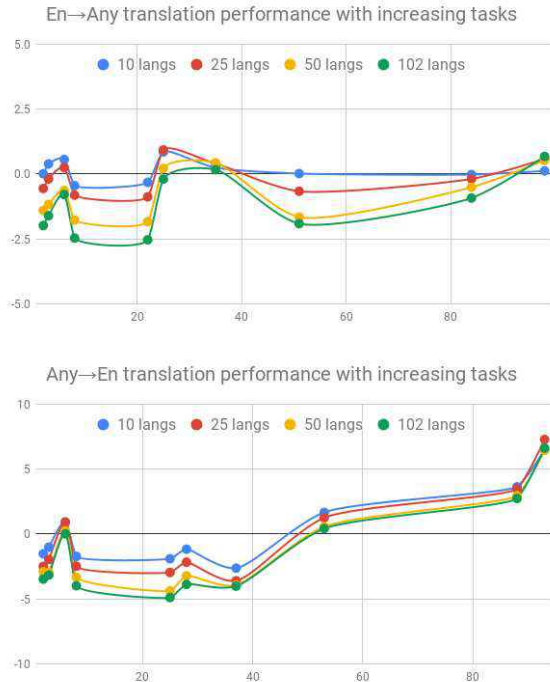


Figure 6: Effect of increasing the number of languages on the translation performance of multilingual models. From left to right, languages are arranged in decreasing order of available training data. Results are reported relative to those of the bilingual baselines (2). The colors correspond to the following groupings of languages: (i) Blue: 10 languages \leftrightarrow En, (ii) Red: 25 languages \leftrightarrow En, (iii) Yellow: 50 languages \leftrightarrow En (yellow), and (iv) Green: 102 languages \leftrightarrow En. Note that, we only plot performance on the 10 languages common across all the compared models while keeping the x-axis intact for comparison with other plots. Best viewed in color.

Task Scheduling: Scheduling tasks has been widely studied in the context of multitask learning and meta-learning, but remains relatively under-explored for multilingual NMT (Bengio et al., 2009; Pentina et al., 2015). The scheduling of the tasks, or the scheduling of the corresponding data associated with the task can be studied under two distinct categories, static and dynamic (curriculum learning). Temperature based sampling or co-training with related languages to improve adaptation (Zoph et al., 2016; Neubig and Hu, 2018) fall within the class of static strategies. On the other hand, dynamic or curriculum

learning strategies refine the ratio of tasks simultaneously with training, based on metrics derived from the current state of the learner (Graves et al., 2017). In the context of NMT, (Kumar et al., 2019) learn a RL agent to schedule between different noise levels in the training data, while (Platanios et al., 2019) combined heuristics into a data curriculum. (Kiperwasser and Ballesteros, 2018) designed schedules favoring one target language and (Jean et al., 2018) learn an adaptive scheduler for multilingual NMT. Similar approaches could be extended in the context of learning different language pairs in massively multilingual settings.

Optimization for Multitask Learning: While task scheduling alters the data distribution or the dynamics of the data distribution seen by the learner, optimization algorithms, regularization and loss formulations determine how these examples effect the learning process. While most literature in multilingual NMT, including our work, relies on the same monolithic optimization approach for single and multitask models,⁸ this choice might be far from optimal. There is no dearth of literature exploring loss formulations or regularization techniques that unravel and exploit task relatedness, reformulate loss functions to account for adaptation and exploit meta-learning approaches in multitask models (Vilalta and Drissi, 2002; Zhang and Yang, 2017). Applying optimization approaches designed specifically for multitask models to multilingual NMT might be a fruitful avenue for future research.

4.3 Understanding Transfer

From our experiments on data sampling, we notice that multilingual training with shared weights helps promote transfer to low-resource languages. However, these improvements are imbalanced in how they affect languages when translating to or from English. To better understand *transfer* in multilingual models we individually inspect three different settings: 1) translation from English ($En \rightarrow Any$), 2) translation to English ($Any \rightarrow En$), and 3) translation between non-English language pairs ($Any \rightarrow Any$).

We compare the performance of our model

⁸One adaptive optimizer e.g. Adam, Adafactor with shared accumulators for gradient moments across all tasks.

trained on all language pairs against two models: (i) An identical model trained on all $En \rightarrow Any$ tasks, the one-to-many setup, and (ii) An identical model trained on all $Any \rightarrow En$ tasks, the many-to-one setup. We depict the performance of these models in Figure 7 (and summarize in Table 3). We notice that the many-to-one $Any \rightarrow En$ model achieves huge improvements over our bilingual baselines for all low-resource languages (right-most portion of Figure 7). On the other hand, for the one-to-many $En \rightarrow Any$ model, we notice lesser deterioration in the performance on high resource languages, while the performance on low resource languages does not improve by much.

$En \rightarrow Any$	High 25	Med. 52	Low 25
Bilingual	29.34	17.50	11.72
$All \rightarrow All$	28.03	16.91	12.75
$En \rightarrow Any$	28.75	17.32	12.98
$Any \rightarrow En$	High 25	Med. 52	Low 25
Bilingual	37.61	31.41	21.63
$All \rightarrow All$	33.85	30.25	26.96
$Any \rightarrow En$	36.61	33.66	30.56

Table 3: Average translation quality (BLEU) of multilingual models trained on differing groups of languages. High 25 refers to the top 25 languages by dataset size, while low 25 refers to the bottom 25. $All \rightarrow All$ reports the performance of the multilingual model trained on all language pairs, $En \rightarrow Any$ was trained on all language pairs with English as the source and $Any \rightarrow En$ was trained on all language pairs with English as the target.

This discrepancy between the transfer for $Any \rightarrow En$ and $En \rightarrow Any$ can be better understood under the characterization of the many-to-one $Any \rightarrow En$ model as a multi-domain model, where each source language constitutes a separate domain, and the one-to-many $En \rightarrow Any$ model as a multi-task model, with each target language representing a separate task (Section 2). This formulation of multilingual NMT helps explain the aforementioned observations, which suggest that multilingual models might be more amenable to transfer across input domains than transfer across tasks. Simple joint training does not do much to benefit one-to-many multilingual NMT; while some improvements may arise from the model

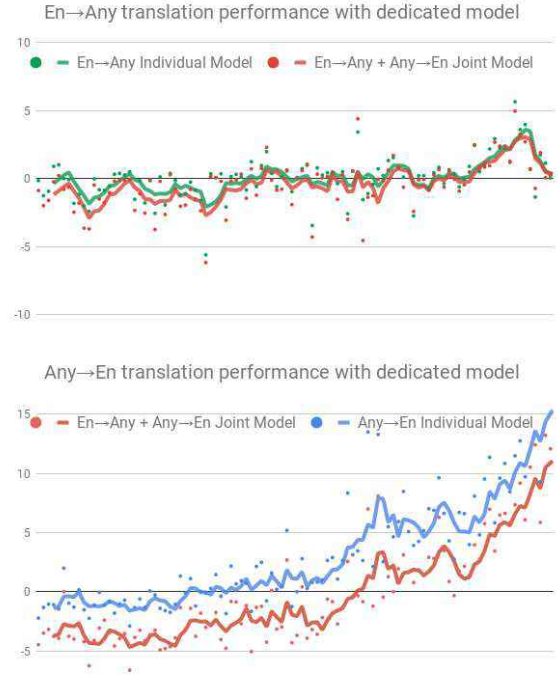


Figure 7: Results comparing the performance of models trained to translate English to and from all languages to two separate from and to English models. From left to right, languages are arranged in decreasing order of available training data. Results are reported relative to those of the bilingual baselines (2). The colors correspond to the following models: (i) Green: dedicated (individual) $En \rightarrow Any$ model for top plot, (ii) Blue: dedicated $Any \rightarrow En$ model for bottom plot, and (iii) Red: shared model for both $Any \rightarrow En$ and $En \rightarrow Any$. Best viewed in color.

seeing much more English source data, there is little to no transfer occurring at the task/decoder level. On the other hand, it is much easier for many-to-one multilingual models to reap the benefits of joint training when the inputs are from different domains: the output distribution remains the same, hence learning a much stronger English language model, without any interference from the other target languages or tasks. This is also reflected in other works on low-resource machine translation where $Any \rightarrow En$ typically benefits the most (Zoph et al., 2016; Nguyen and Chi-ang, 2017; Gu et al., 2018a,b).

Another strong indicator of transfer in multilingual models is the quality on zero-shot trans-

	$De \rightarrow Fr$	$Be \rightarrow Ru$	$Yi \rightarrow De$	$Fr \rightarrow Zh$	$Hi \rightarrow Fi$	$Ru \rightarrow Fi$
10 langs	11.15	36.28	8.97	15.07	2.98	6.02
102 langs	14.24	50.26	20.00	11.83	8.76	9.06

Table 4: Effect of increasing the number of languages on the zero-shot performance of multilingual models.

lation. Multilingual models possess a unique advantage over single task models, in that they are capable of translating between any pair of supported input and output languages, even when no direct parallel data is available (Firat et al., 2016b). However, without supervision from parallel data between non-English language pairs, zero-shot translation quality often trails the performance of pivoting/bridging through a common language (Johnson et al., 2017). Given the lack of transfer across different $En \rightarrow Any$ translation tasks, it isn’t hard to imagine why transferring across $Yy \rightarrow En$ and $En \rightarrow Xx$, to learn $Yy \rightarrow Xx$, is an even more challenging task.

Enabling direct translation between arbitrary languages has been widely studied, and has the potential to obviate the need for two-step pivoting which suffers from higher latency and accumulated errors. The most effective approach has been to simply synthesize parallel data (Firat et al., 2016b; Chen et al., 2017, 2018b) and incorporate that into the training process. However, this two-stage approach becomes intractable when dealing with a large number of languages; the amount of synthesized data required to enable zero-shot translation grows quadratically with the number of languages. More recent work has demonstrated that direct translation quality may be improved even in a zero-shot setting, by incorporating more languages (Aharoni et al., 2019), adding regularization to promote cross-lingual transfer (Arivazhagan et al., 2019; Gu et al., 2019; Al-Shedivat and Parikh, 2019), and modeling strategies that encourage shared cross-lingual representations (Lu et al., 2018; Escolano et al., 2019).

We report the zero-shot performance of our 10 language and 102 language models, discussed in Section 4.2, on selected language pairs in Table 4. We observe that zero-shot performance on similar languages, in this case $Be \rightarrow Ru$ and $Yi \rightarrow De$, is extremely high. We also notice that **the zero-shot performance for most language pairs in-**

creases as we move from the 10 language model to the 102 language model, possibly due to the regularization effect in the capacity constrained setting, similar to what was observed in (Aharoni et al., 2019). This also indicates why methods that explicitly force languages to share the same representation space (Arivazhagan et al., 2019; Gu et al., 2019; Lu et al., 2018) may be key to improving zero-shot translation performance.

We next delve into pre-processing and vocabulary generation when dealing with hundreds of languages.

5 Pre-processing and Vocabularies

Pre-processing and vocabulary construction lay central to the generalization ability of natural language processing systems.

To generalize to unseen examples, machine learning algorithms must decompose the input data into a set of basic units (e.g. pixels, characters, phonemes etc.) or building blocks. For text, this set of basic units or building blocks is referred to as the vocabulary. Given some text and a vocabulary, a segmentation algorithm or a pre-processor is applied to fragment the text to its building blocks upon which the learner may then apply inductive reasoning.

In essence, a properly defined vocabulary needs to (i) maintain a high coverage by being able to compose most text and produce minimal number of Out-of-Vocabulary (OOV) tokens during segmentation, (ii) have tractable size to limit computational and spatial costs, and (iii) operate at the right level of granularity to enable inductive transfer with manageable sequence lengths which increase computational costs.

Early NMT models operated at the word level (Sutskever et al., 2014; Cho et al., 2014; Bahdanau et al., 2014). Coverage issues arising from difficulty capturing all words of a language within a limited vocabulary budget promoted the development of character level systems (Ling et al., 2015;

Luong and Manning, 2016; Chung et al., 2016; Costa-jussà and Fonollosa, 2016; Lee et al., 2017; Cherry et al., 2018). These trivially achieve high coverage, albeit with the downside of increased computational and modeling challenges due to increased sequence lengths. Sub-word level vocabularies (Sennrich et al., 2016) have since found a middle ground and are used in most state-of-the-art NMT systems.

Constructing vocabularies that can model hundreds of languages with vast number of character sets, compositional units, and morphological variance is critical to developing massively multilingual systems, yet remains challenging. Early multilingual NMT models utilized *separate* vocabularies for each language (Dong et al., 2015; Luong et al., 2015; Firat et al., 2016a); later ones used *shared* multilingual vocabularies (Sennrich et al., 2016; Ha et al., 2016c; Johnson et al., 2017) which are shared across languages. Recently, hybrid (*Shared + Separate*) multilingual vocabularies and approaches for adding new languages to existing vocabularies (Lakew et al., 2018) have also been explored.

In this section we describe the simplistic approach to multilingual vocabulary construction used in our setup, inspect implicit characteristics of such vocabularies, and finally evaluate the downstream effects on multilingual machine translation.

5.1 Vocabulary Construction and Characteristics

We construct all our vocabularies using Sentence Piece Model (SPM) (Kudo and Richardson, 2018) to remove complexity that may arise from language specific pre-processing (e.g. tokenization, special character replacements etc.). The large number of languages used in our setup makes *separate* per-language vocabularies infeasible. Therefore, we picked *shared* sub-word vocabularies. While using a single shared vocabulary across all languages reduces complexity, it introduces other challenges that we discuss below.

With the large number of scripts introduced in a multilingual setting, the chance of a vocabulary producing unknowns (OOV) increases. Note that since only unrecognized characters will be encoded as OOV, if the vocabulary provides suf-

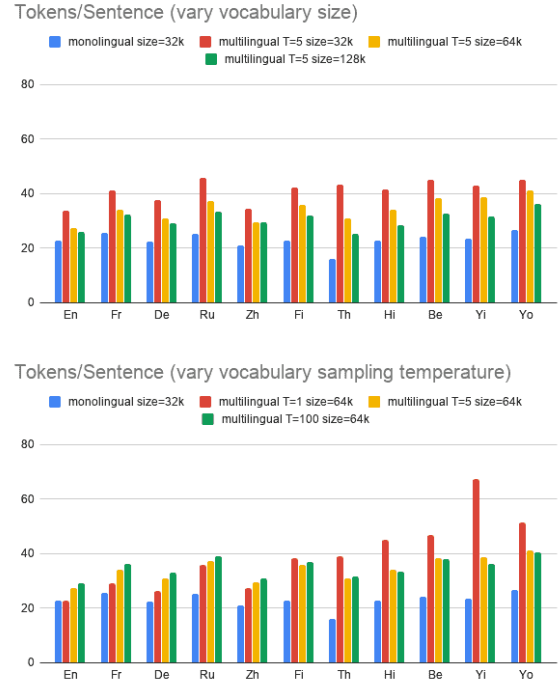


Figure 8: Average number of sentence-piece tokens per sentence on random samples drawn from the training set. We compare the increase in number of tokens per sentence for different languages, when moving from a standard monolingual vocabulary with 32k tokens to a multilingual vocabulary for which we vary the vocabulary size ($\text{size}=\{32k, 64k, 128k\}$ tokens) and the vocabulary sampling temperature ($T = \{1, 5, 100\}$).

ficient coverage over the alphabet from various scripts, OOV rates will be low. For SPMs, this is tuned using the `character_coverage` option and we to a high value of $1 - (5 * 10^{-6})$ which yields an alphabet size of around 12000, ensuring very low unknown rates for all the languages in our study.

While ensuring low unknown rates, the shift towards a vocabulary which largely consists of characters or short sub-words (in terms of the number of characters that they consist of) results in longer sequences after tokenization (Chung et al., 2016; Costa-jussà and Fonollosa, 2016). Longer sequence lengths, however, increase computational complexity and may also introduce optimization challenges due to longer range dependencies and require *the learner* to model a more complex mapping function from a finer grained sequence to meaning. To avoid exceedingly long sequence

$En \rightarrow Any$	High 25	Med. 52	Low 25
32k Vocab	27.69	16.84	12.90
64k Vocab	28.03	16.91	12.75
$Any \rightarrow En$	High 25	Med. 52	Low 25
32k Vocab	33.24	29.40	26.18
64k Vocab	33.85	30.25	26.96

Table 5: Average translation quality (BLEU) of multilingual models using different SPM vocabulary sizes, over different groups of languages. High 25 refers to the top 25 languages by dataset size, while low 25 refers to the bottom 25.

lengths we need to increase the vocabulary size so that it may include longer tokens (sub-sequence that consist of longer number of characters).

Finally, a shared multilingual vocabulary runs the risk of favoring some languages over others, due to the imbalance of the dataset size the vocabulary is extracted. To reduce the effect of imbalanced dataset size we apply the same temperature sampling strategy discussed in Section 4 to Vocabulary Sampling.

In Figure 8 we report the effect of varying the vocabulary size ($size = \{32k, 64k, 128k\}$ tokens) and sampling temperature ($T = \{1, 5, 100\}$) on the average number of tokens per sentence on 10 indicative languages. We see that it is important to balance different languages by using a higher sampling temperature of $T = 5$ or $T = 100$, in order to avoid exceedingly long sequence lengths for low resource languages. Orthogonally, increasing the vocabulary size also helps to reduce sequence lengths, especially on low resource languages. Here we continue experiments with $T_V = 5$ to stay aligned with our sampling approach during NMT training.

We next train and evaluate a few multilingual models to study the effect of different vocabulary sizes and sampling strategies on overall translation quality. Following the experiments in Section 4, we train single multilingual models on all language pairs, using a data sampling temperature of $T = 5$. All our models are Transformer-Big, trained with the same set of hyper-parameters, different only in terms of the vocabulary used.

Table 5 compares the quality of two models trained using vocabularies of size 32k and 64k.

$En \rightarrow Any$	High 25	Med. 52	Low 25
$T_V = 1$	27.81	16.72	12.73
$T_V = 100$	27.83	16.86	12.78
$T_V = 5$	28.03	16.91	12.75
$Any \rightarrow En$	High 25	Med. 52	Low 25
$T_V = 1$	33.82	29.78	26.27
$T_V = 100$	33.70	30.15	26.91
$T_V = 5$	33.85	30.25	26.96

Table 6: Average translation quality (BLEU) of multilingual models using different sampling temperatures for vocabulary generation. High 25 refers to the top 25 languages by dataset size, while low 25 refers to the bottom 25.

We notice that the model with the smaller 32k token vocab does noticeably worse on high resource languages when translating in both directions, and on $Any \rightarrow En$ translation in all resource settings. On the other hand, the smaller vocab model performs marginally better when translating into low resource languages on $En \rightarrow Any$. For other medium resource languages, increased vocabulary size appears to be better on all directions. Our results here agree with existing literature (Cherry et al., 2018; Kreutzer and Sokolov, 2018) suggesting that using smaller sub-word tokens, as is the case for smaller vocabularies, performs better in low resource settings due to improved generalization. Notable languages where the smaller vocabulary performs better include Corsican (*co*) and Uzbek (*uz*), both low resource languages which have known similar high resource languages to aid with generalization.

We compare the translation quality of models that vary only in their vocabulary sampling temperature in Table 6. While not very pronounced, we do notice some differences in quality based on the vocabulary sampling temperature. Languages that perform better with a higher temperature of $T_V = 5$ or $T_V = 100$ include low-medium resource languages like Mongolian (*mn*), Zulu (*zu*), Corsican (*co*) and Uzbek (*uz*). These gains may have originated from two potential factors: (i) Smaller tokens for high resource languages result in better transfer to related low resource languages (ii) Better character coverage for languages with distinct character sets.

While the effects of vocabulary are much smaller than the trends observed for data sampling, failure to ensure careful character coverage and fair representation from all languages could nonetheless significantly impact translation quality.

So far in our study, we have presented our analysis and experimentation with data, training and vocabulary in multilingual scenarios. We next analyze the effect of several architectural choices on the quality of our massively multilingual NMT model.

6 Modeling

The quality of any neural network is largely dependent on its architecture and parametrization. The choice of the model, and the constraints on its parameters determine the extent of the transfer-interference trade-off, the learning dynamics and, ultimately, the performance limits of the model. In this section we analyze how choices regarding parameter sharing and model capacity can impact translation quality in the setting of massively multilingual NMT.

6.1 Architecture

In recent years, several revolutionary architectures have been developed to improve MT quality (Gehring et al., 2017; Vaswani et al., 2017; Chen et al., 2018a; Wu et al., 2019). However, in the context of multilingual NMT, the most common prior imposed on models is typically in the form of (hard or soft) parameter sharing constraints across different languages pairs. In designing a multilingual NMT model, we would like to take advantage of the common structures and features shared by multiple languages, which imposes constraints on the model architecture. These constraints range from sharing a fixed length representation across all source and target pairs (Luong et al., 2015), sharing small network modules, for example the attention parameters (Firat et al., 2016a), and sharing everything except the attention parameters (Ha et al., 2016b; Blackwood et al., 2018), to sharing all parameters in the model across all language pairs (Johnson et al., 2017; Ha et al., 2016c). Some studies also explore partial parameter sharing strategies tailored for specific architectures (Sachan and Neubig, 2018; Wang

et al., 2018b). More recently, with the increased number of languages (Qi et al., 2018; Aharoni et al., 2019), there has been work along the lines of applying soft sharing for MT, in the form of a shared set of meta-learned parameters used to generate task level parameters (Platanios et al., 2018). All of these sharing strategies come paired with their associated set of transfer-interference trade-offs, and regardless of the sharing strategy, in the absence of a complete and accurate atlas of task relatedness, more transferrability also implies more interference. This phenomenon is known to be a common problem for multitask learning, and is also related to the stability vs plasticity dilemma (Carpenter and Grossberg, 1987; Grossberg, 1988). See (Parisi et al., 2018) for a categorization of such work.

Considering the scale of our experimental setup and end-goal, combinatorial approaches for parameter sharing do not emerge as plausible solutions. While “learning to share” approaches (Kang et al., 2011; Ruder et al., 2017; Platanios et al., 2018) are promising alternatives, a more straightforward solution could be implicitly increasing the per-task capacity by increasing overall model capacity. Next we look into a brute-force approach to mitigate interference by enhancing model capacity.

6.2 Capacity

Over the last few years, scaling up model capacity has been shown to demonstrate huge improvements on several supervised and transfer learning benchmarks, including MT (Brock et al., 2018; Devlin et al., 2018; Radford et al.; Shazeer et al., 2018). Scale often comes bundled with new hardware, infrastructure, and algorithmic approaches meant to optimize accelerator memory utilization and benefit faster computation, including methods like gradient checkpointing and low precision training (Courbariaux et al., 2014; Ott et al., 2018), memory efficient optimizers (Shazeer and Stern, 2018; Gupta et al., 2018) and frameworks supporting model parallelism (Shazeer et al., 2018; Harlap et al.; Huang et al., 2018).

While massive models have been shown to improve performance in single task settings (Shazeer et al., 2018), we would expect the gains to be even larger on a capacity-constrained massively multi-

$En \rightarrow Any$	High 25	Med. 52	Low 25
Bilingual	29.34	17.50	11.72
400M	28.03	16.91	12.75
1.3B Wide	28.36	16.66	11.14
1.3B Deep	29.46	17.67	12.52
$Any \rightarrow En$	High 25	Med. 52	Low 25
Bilingual	37.61	31.41	21.63
400M	33.85	30.25	26.96
1.3B Wide	37.13	33.21	27.75
1.3B Deep	37.47	34.63	31.21

Table 7: Average translation quality (BLEU) of multilingual models with increasing capacity. High 25 refers to the top 25 languages by dataset size, while low 25 refers to the bottom 25.

lingual task. We next try to quantify how the performance of our model scales with capacity. Additionally, we also compare two dimensions along which model capacity can be increased—depth and width—and compare how performance across different tasks is affected when scaling along these two dimensions.

We start with our Transformer-Big baseline with a 64k vocabulary, trained with a data sampling temperature of $T = 5$. This model has around 400M parameters, including the embeddings and the softmax layers. We compare the performance of two scaled up models with around 1.3B parameters. Our first model is the wide model, with 12 layers in both the encoder and the decoder (24 layers in total), feed-forward hidden dimensions set to 16384, 32 attention heads and an attention hidden dimension set to 2048 (Shazeer et al., 2018). The deep model has 24 layers in the encoder and the decoder (48 layers in total), with all other hyper-parameters being equivalent to the Transformer-Big. To avoid trainability hurdles, both these models are trained with transparent attention (Bapna et al., 2018). Further, in order to enable training these massive models, we utilize GPipe (Huang et al., 2018) to incorporate efficient model parallelism. Both 1.3B param wide and deep models are trained with 128 TPUv3 chips, parallelized over 2 and 4 cores respectively.⁹ We use the same 4M token batch size used for all our multilingual experiments.

⁹Note, each TPUv3 chip has 2 cores.

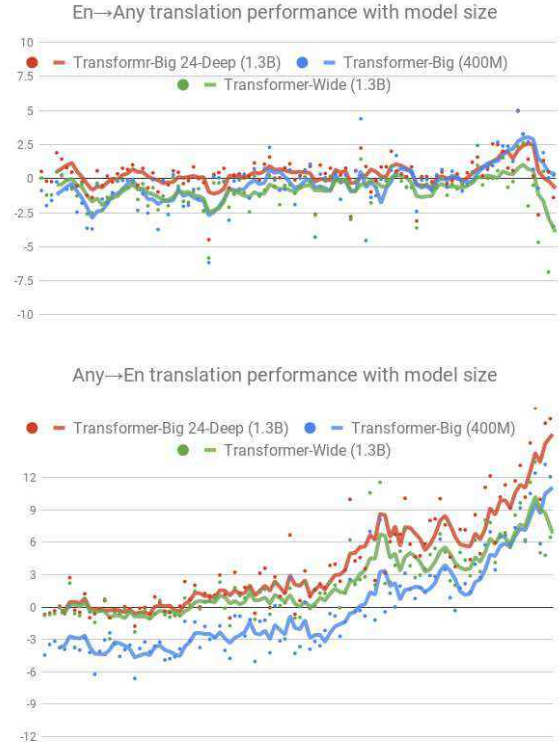


Figure 9: Effect of increasing capacity on the performance of multilingual models. From left to right, languages are arranged in decreasing order of available training data. Results are reported relative to those of the bilingual baselines (2). The plots correspond to the following models: blue: 400M param ‘Transformer-Big’, green: 1.3B param, 12 layer wide model and red: 1.3B param, 24 layer model. Best viewed in color.

The performance of these two models and the baseline Transformer-Big is depicted in Figure 9 (also summarized in Table 7). We notice that both these models improve performance by significant amounts on the high resource languages, when compared against the capacity constrained massively multilingual baseline (blue curves in Figure 9). However, the deep model handily beats both, the baseline and the equivalent capacity wide model, by significant margins on most of the language pairs. We also notice that, unlike the wide model, the deep model does not overfit in low resource languages and, in fact, significantly enhances transfer to low resource languages on the $Any \rightarrow En$ translation tasks.

Our results suggest that model capacity might

be one of the most important factors determining the extent of the transfer-interference trade-off. However, naively scaling capacity might result in poor transfer performance to low resource languages. For example, our wide Transformer while significantly improving performance on the high resource languages, fails to show similar gains in the low resource setting. While deeper models show great performance improvements, they come bundled with high decoding latency, a significantly larger computational footprint, and trainability concerns including vanishing/exploding gradients, early divergence, ill-conditioned initial conditions etc. (Hestness et al., 2017). Further research into various aspects of scalability, trainability and optimization dynamics is expected to be a fruitful avenue towards universal NMT.

We next delve into evaluation challenges posed by multilingual models.

7 Evaluation

Metrics for automatic quality evaluation (Papineni et al., 2002) have been critical to the rapid progress in machine translation, by making evaluation fast, cheap and reproducible. For multilingual NMT, new concerns arise due to the multi-objective nature of the problem and the inherent quality trade-offs between languages.

Inter-language quality trade-offs arise due to various decisions made while constructing, training and selecting a model. When constructing the model, the vocabulary may be constructed to favor a certain script or group of languages, or the language specific parameters may be unevenly distributed across languages. During training, the optimization settings or the rate at which training data from different languages are sampled strongly influence the eventual performance on different languages. Finally, when selecting a checkpoint¹⁰, the model may perform better on high resource languages at later checkpoints but may have regressed on low resource languages by that time due to over-training (or under-training for the opposing case). Each of these choices naturally may favor certain languages over others.

To choose between the aforementioned trade-offs, we need a translation quality metric that is

both effective and comparable across languages. This in and of itself is a hard problem with an ever growing list of hundreds of metrics to choose from. Oftentimes these metrics vary in their effectiveness across languages; WMT shared tasks (Ma et al., 2018b) report that the specific language, dataset, and system significantly affect which metric has the strongest correlation with human ratings. When metrics are sufficiently effective across languages they are not always comparable. N-gram based metrics (Papineni et al., 2002; Doddington, 2002; Wang et al., 2016; Popović, 2015) that measure lexical overlap require tokenization which is highly affected by language specific factors such as alphabet size and morphological complexity. In fact, even within the same language, tokenization discrepancies pose significant challenges to reliable evaluation (Post, 2018). Embedding based approaches (Stanojevic and Sima'an, 2014) may be language agnostic and help address these issues.

Equally important to choosing a metric is choosing an evaluation set. Most existing metrics are not consistent (Banerjee and Lavie, 2005) and for the same model vary based on the domain or even the specific sentences that they are being evaluated on. For example, there are significant differences of 3-5 BLEU between the WMT dev and test sets for the same language pair. Such consistency issues may further exacerbate the difficulty of comparing system quality across languages if we use different test sets for each language. This may be addressed by ensuring that evaluation is performed on the same corpora that has been translated to all the languages, i.e. multi-way parallel data. Even so, attention must be paid to the original language (Freitag et al., 2019) and domain such data is collected from.

8 Open Problems in Massively Multilingual NMT

Data and Supervision Whereas we focus solely on supervised learning, for many low resource languages it becomes essential to learn from monolingual data. There has been a lot of recent work on incorporating monolingual data to improve translation performance in low and zero resource settings, including research on back-translation (Sennrich et al., 2015; Edunov

¹⁰Certain snapshot of the model parameters.

et al., 2018), language model fusion (Gulcehre et al., 2015; Sriram et al., 2017), self-supervised pre-training (Dai and Le, 2015; Ramachandran et al., 2016; Zhang and Zong, 2016; Song et al., 2019) and unsupervised NMT (Lample et al., 2017; Artetxe et al., 2017). Languages where large swathes of monolingual data are not easily available might require more sample efficient approaches for language modeling, including grounding with visual modalities or sources of information (Huang et al., 2016), and learning from meta-data or other forms of context. Being able to represent and ground information from multiple modalities in the same representational space is the next frontier for ML research.

The scope of our study is limited to 103 languages, a minuscule fraction of the thousands of existing languages. The heuristics and approaches we develop will be less and less applicable as we include more languages and incorporate other forms of data. As we scale up model sizes and the number of languages learned within a single model, approaches that require multi-stage training or inference steps will likely become infeasible. Work towards better integration of self-supervised learning with the supervised training process is more likely to scale well with larger model capacities and increasing number of languages.

Learning Developing learning approaches that work well for multitask models is essential to improving the quality of multilingual models. Our analysis from Section 4 demonstrates that even simple heuristics for data sampling/balancing can significantly improve the extent of transfer and interference observed by individual tasks. However, our heuristic strategy only takes dataset size into account when determining the fraction of per-task samples seen by the model. Research on exploiting task-relatedness (Lee et al., 2016; Neubig and Hu, 2018), curriculum learning on noisy data (van der Wees et al., 2017; Wang et al., 2018a), and automated curriculum learning from model state (Bengio et al., 2009; Graves et al., 2017) have demonstrated success in multitask learning, including for NMT. Other relevant threads of work include research on meta-learning to learn model hyper-parameters (Nichol et al., 2018; Baydin et al., 2017), model param-

eters (Ha et al., 2016a; Platanios et al., 2018) and models that learn new tasks with high sample efficiency (Finn et al., 2017) without forgetting existing tasks or languages (Rusu et al., 2016; Kirkpatrick et al., 2017; Lakew et al., 2018). When scaling to thousands of languages, approaches that can automatically learn data sampling, curricula, model hyper-parameters and parameters, to train models that quickly adapt to new tasks, is again expected to become increasingly important.

Increasing Capacity Increasing the model capacity has been demonstrated to be a sure-shot approach to improving model quality in the presence of supervised data for several tasks, including Image Generation (Brock et al., 2018), Language Modeling and transfer learning (Radford et al.; Devlin et al., 2018) and NMT (Shazeer et al., 2018). Validating this trend, one key result from our study is the need for sufficient model capacity when training large multitask networks. Other than the systems and engineering challenges (Jouppi et al., 2017; Huang et al., 2018; Shazeer et al., 2018), training deep and high capacity neural networks poses significant trainability challenges (Montavon et al., 2018). A better theoretical understanding of the generalization ability of deep and wide models (Raghu et al., 2017; Arora et al., 2018), trainability challenges including exploding and vanishing gradients (Glorot and Bengio, 2010; Balduzzi et al., 2017) and empirical approaches to counter these challenges (Bapna et al., 2018; Zhang et al., 2019) are critical to further scaling of model capacity.

Architecture and Vocabulary Extending existing approaches for vocabulary construction and neural modeling to work better in multitask settings (Ma et al., 2018a; Houlsby et al., 2019) in order to strike the right balance between shared and task-specific capacity, or learning network structure in order to maximally exploit task relatedness (Li et al., 2019) are exciting avenues for future research. As we scale up to thousands of languages, vocabulary handling becomes a significantly harder challenge. Successfully representing thousands of languages might require character (Lee et al., 2017; Cherry et al., 2018), byte (Gillick et al., 2015) or even bit level modeling. Modeling extremely long sequences of bit/byte-

level tokens would present its own set of modeling challenges. Finally, while scaling up existing approaches is one way to improve model quality, some approaches or architectures are more efficient to train (Shazeer et al., 2017; Vaswani et al., 2017; Wu et al., 2019), more sample efficient, or faster at inference (Gu et al., 2017; Roy et al., 2018). As models get larger, improving training and inference efficiency become more important to keep training and inference times within reasonable limits from both a practical and environmental perspective (Strubell et al., 2019).

9 Conclusion

Although we believe that we have achieved a milestone with the present study, building on five years of multilingual NMT research, we still have a long way to go towards truly universal machine translation. In the open problems and future directions enumerated above, many promising solutions appear to be interdisciplinary, making multilingual NMT a plausible general test bed for other machine learning practitioners and theoreticians.

Acknowledgments

We would like to thank the Google Translate and Google Brain teams for their useful input and discussion, and the entire Lingvo development team for their foundational contributions to this project. We would also like to thank Katherine Lee, Thang Luong, Colin Raffel, Noam Shazeer, and Geoffrey Hinton for their insightful comments.

References

- Roei Aharoni, Melvin Johnson, and Orhan Firat. 2019. [Massively multilingual neural machine translation](#). *CoRR*, abs/1903.00089.
- Maruan Al-Shedivat and Ankur P Parikh. 2019. Consistency by agreement in zero-shot neural machine translation. *arXiv preprint arXiv:1904.02338*.
- Naveen Arivazhagan, Ankur Bapna, Orhan Firat, Roei Aharoni, Melvin Johnson, and Wolfgang Macherey. 2019. The missing ingredient in zero-shot neural machine translation. *arXiv preprint arXiv:1903.07091*.
- Sanjeev Arora, Nadav Cohen, and Elad Hazan. 2018. On the optimization of deep networks: Implicit acceleration by overparameterization. *arXiv preprint arXiv:1802.06509*.
- Mikel Artetxe, Gorka Labaka, Eneko Agirre, and Kyunghyun Cho. 2017. Unsupervised neural machine translation. *arXiv preprint arXiv:1710.11041*.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2014. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*.
- David Balduzzi, Marcus Frean, Lennox Leary, JP Lewis, Kurt Wan-Duo Ma, and Brian McWilliams. 2017. The shattered gradients problem: If resnets are the answer, then what is the question? In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 342–350. JMLR. org.
- Satanjeev Banerjee and Alon Lavie. 2005. Meteor: An automatic metric for mt evaluation with improved correlation with human judgments. In *Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*, pages 65–72.
- Ankur Bapna, Mia Xu Chen, Orhan Firat, Yuan Cao, and Yonghui Wu. 2018. Training deeper neural machine translation models with transparent attention. *arXiv preprint arXiv:1808.07561*.
- Atilim Gunes Baydin, Robert Cornish, David Martinez Rubio, Mark Schmidt, and Frank Wood. 2017. Online learning rate adaptation with hypergradient descent. *arXiv preprint arXiv:1703.04782*.
- Yoshua Bengio, Jérôme Louradour, Ronan Collobert, and Jason Weston. 2009. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, pages 41–48. ACM.

- Graeme Blackwood, Miguel Ballesteros, and Todd Ward. 2018. Multilingual neural machine translation with task-specific attention. *arXiv preprint arXiv:1806.03280*.
- Ondrej Bojar, Rajen Chatterjee, Christian Federmann, et al. 2018a. [Proceedings of the third conference on machine translation: Research papers](#). Belgium, Brussels. Association for Computational Linguistics.
- Ondřej Bojar, Rajen Chatterjee, Christian Federmann, et al. 2017. Findings of the 2017 conference on machine translation (wmt17). In *Proceedings of the Second Conference on Machine Translation*, pages 169–214.
- Ondřej Bojar, Rajen Chatterjee, Christian Federmann, et al. 2016a. Findings of the 2016 conference on machine translation. In *ACL 2016 FIRST CONFERENCE ON MACHINE TRANSLATION (WMT16)*, pages 131–198. The Association for Computational Linguistics.
- Ondřej Bojar, Christian Federmann, Mark Fishel, Yvette Graham, Barry Haddow, Philipp Koehn, and Christof Monz. 2018b. [Findings of the 2018 conference on machine translation \(wmt18\)](#). In *Proceedings of the Third Conference on Machine Translation: Shared Task Papers*, pages 272–303, Belgium, Brussels. Association for Computational Linguistics.
- Ondrej Bojar, Christian Federmann, Barry Haddow, Philipp Koehn, Matt Post, and Lucia Specia. 2016b. Ten years of wmt evaluation campaigns: Lessons learnt. In *Proceedings of the LREC 2016 Workshop on AIJ Translation Evaluation – From Fragmented Tools and Data Sets to an Integrated Ecosystem*, pages 27–34.
- Andrew Brock, Jeff Donahue, and Karen Simonyan. 2018. Large scale gan training for high fidelity natural image synthesis. *arXiv preprint arXiv:1809.11096*.
- Gail A Carpenter and Stephen Grossberg. 1987. Art 2: Self-organization of stable category recognition codes for analog input patterns. *Applied optics*, 26(23):4919–4930.
- Rich Caruana. 1997. [Multitask learning](#). *Machine Learning*, 28(1):41–75.
- Mauro Cettolo, C Girardi, and M Federico. 2012. Wit3: Web inventory of transcribed and translated talks. *Proceedings of EAMT*, pages 261–268.
- Mia Xu Chen, Orhan Firat, Ankur Bapna, et al. 2018a. [The best of both worlds: Combining recent advances in neural machine translation](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 76–86, Melbourne, Australia. Association for Computational Linguistics.
- Yun Chen, Yang Liu, Yong Cheng, and Victor OK Li. 2017. A teacher-student framework for zero-resource neural machine translation. *arXiv preprint arXiv:1705.00753*.
- Yun Chen, Yang Liu, and Victor OK Li. 2018b. Zero-resource neural machine translation with multi-agent communication game. In *Thirty-Second AAAI Conference on Artificial Intelligence*.
- Zhiyuan Chen and Bing Liu. 2016. Lifelong machine learning. *Synthesis Lectures on Artificial Intelligence and Machine Learning*, 10(3):1–145.
- Colin Cherry, George Foster, Ankur Bapna, Orhan Firat, and Wolfgang Macherey. 2018. [Revisiting character-based neural machine translation with capacity and compression](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4295–4305, Brussels, Belgium. Association for Computational Linguistics.
- Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. 2014. [Learning phrase representations using rnn encoder–decoder for statistical machine translation](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1724–1734, Doha, Qatar. Association for Computational Linguistics.
- Junyoung Chung, Kyunghyun Cho, and Yoshua Bengio. 2016. A character-level decoder with-

- out explicit segmentation for neural machine translation. *arXiv preprint arXiv:1603.06147*.
- Ronan Collobert and Jason Weston. 2008. A unified architecture for natural language processing: Deep neural networks with multitask learning. In *Proceedings of the 25th International Conference on Machine Learning*, pages 160–167.
- Marta R. Costa-jussà and José A. R. Fonollosa. 2016. [Character-based neural machine translation](#). *CoRR*, abs/1603.00810.
- Matthieu Courbariaux, Yoshua Bengio, and Jean-Pierre David. 2014. Training deep neural networks with low precision multiplications. *arXiv preprint arXiv:1412.7024*.
- Josep Maria Crego, Jungi Kim, Guillaume Klein, et al. 2016. [Systran’s pure neural machine translation systems](#). *CoRR*, abs/1610.05540.
- Andrew M Dai and Quoc V Le. 2015. Semi-supervised sequence learning. In *Advances in neural information processing systems*, pages 3079–3087.
- L. Deng, G. Hinton, and B. Kingsbury. 2013. New types of deep neural network learning for speech recognition and related applications: an overview. In *2013 IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 8599–8603.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- George Doddington. 2002. Automatic evaluation of machine translation quality using n-gram co-occurrence statistics. In *Proceedings of the second international conference on Human Language Technology Research*, pages 138–145. Morgan Kaufmann Publishers Inc.
- Daxiang Dong, Hua Wu, Wei He, Dianhai Yu, and Haifeng Wang. 2015. Multi-task learning for multiple language translation. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, volume 1, pages 1723–1732.
- Mark Dredze, Alex Kulesza, and Koby Crammer. 2010. [Multi-domain learning by confidence-weighted parameter combination](#). *Mach. Learn.*, 79(1-2):123–149.
- Sergey Edunov, Myle Ott, Michael Auli, and David Grangier. 2018. Understanding back-translation at scale. *arXiv preprint arXiv:1808.09381*.
- Carlos Escolano, Marta R Costa-jussà, and José AR Fonollosa. 2019. Towards interlingua neural machine translation. *arXiv preprint arXiv:1905.06831*.
- Chelsea Finn, Pieter Abbeel, and Sergey Levine. 2017. Model-agnostic meta-learning for fast adaptation of deep networks. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 1126–1135. JMLR.org.
- Orhan Firat, Kyunghyun Cho, and Yoshua Bengio. 2016a. Multi-way, multilingual neural machine translation with a shared attention mechanism. *arXiv preprint arXiv:1601.01073*.
- Orhan Firat, Kyunghyun Cho, Baskaran Sankaran, Fatos T. Yarman Vural, and Yoshua Bengio. 2017. [Multi-way, multilingual neural machine translation](#). *Computer Speech & Language*, 45:236 – 252.
- Orhan Firat, Baskaran Sankaran, Yaser Al-Onaizan, Fatos T Yarman Vural, and Kyunghyun Cho. 2016b. Zero-resource translation with multi-lingual neural machine translation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 268–277.
- Markus Freitag, Isaac Caswell, and Scott Roy. 2019. Text repair model for neural machine translation. *arXiv preprint arXiv:1904.04790*.
- Jonas Gehring, Michael Auli, David Grangier, Denis Yarats, and Yann N. Dauphin. 2017.

- Convolutional sequence to sequence learning. *CoRR*, abs/1705.03122.
- Dan Gillick, Cliff Brunk, Oriol Vinyals, and Amarnag Subramanya. 2015. Multilingual language processing from bytes. *arXiv preprint arXiv:1512.00103*.
- Xavier Glorot and Yoshua Bengio. 2010. Understanding the difficulty of training deep feedforward neural networks. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics*, pages 249–256.
- Siavash Golkar, Michael Kagan, and Kyunghyun Cho. 2019. [Continual learning via neural pruning](#). *CoRR*, abs/1903.04476.
- Ian Goodfellow, Yoshua Bengio, and Aaron Courville. 2016. *Deep Learning*. The MIT Press.
- Alex Graves, Marc G Bellemare, Jacob Menick, Remi Munos, and Koray Kavukcuoglu. 2017. Automated curriculum learning for neural networks. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 1311–1320. JMLR. org.
- Stephen Grossberg. 1988. [Neurocomputing: Foundations of research](#). chapter How Does the Brain Build a Cognitive Code?, pages 347–399. MIT Press, Cambridge, MA, USA.
- Jiatao Gu, James Bradbury, Caiming Xiong, Victor OK Li, and Richard Socher. 2017. Non-autoregressive neural machine translation. *arXiv preprint arXiv:1711.02281*.
- Jiatao Gu, Hany Hassan, Jacob Devlin, and Victor O.K. Li. 2018a. [Universal neural machine translation for extremely low resource languages](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 344–354, New Orleans, Louisiana. Association for Computational Linguistics.
- Jiatao Gu, Yong Wang, Yun Chen, Kyunghyun Cho, and Victor OK Li. 2018b. Meta-learning for low-resource neural machine translation. *arXiv preprint arXiv:1808.08437*.
- Jiatao Gu, Yong Wang, Kyunghyun Cho, and Victor OK Li. 2019. Improved zero-shot neural machine translation via ignoring spurious correlations. *arXiv preprint arXiv:1906.01181*.
- Caglar Gulcehre, Orhan Firat, Kelvin Xu, Kyunghyun Cho, Loic Barrault, Huei-Chi Lin, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. 2015. On using monolingual corpora in neural machine translation. *arXiv preprint arXiv:1503.03535*.
- Vineet Gupta, Tomer Koren, and Yoram Singer. 2018. Shampoo: Preconditioned stochastic tensor optimization. *arXiv preprint arXiv:1802.09568*.
- David Ha, Andrew Dai, and Quoc V Le. 2016a. Hypernetworks. *arXiv preprint arXiv:1609.09106*.
- Thanh-Le Ha, Jan Niehues, and Alexander Waibel. 2016b. Toward multilingual neural machine translation with universal encoder and decoder. *arXiv preprint arXiv:1611.04798*.
- Thanh-Le Ha, Jan Niehues, and Alexander H. Waibel. 2016c. [Toward multilingual neural machine translation with universal encoder and decoder](#). *CoRR*, abs/1611.04798.
- Aaron Harlap, Deepak Narayanan, Amar Phanishayee, Vivek Seshadri, Gregory R Ganger, and Phillip B Gibbons. Pipedream: Pipeline parallelism for dnn training.
- Hany Hassan, Anthony Aue, Chang Chen, et al. 2018. Achieving human parity on automatic chinese to english news translation. *arXiv preprint arXiv:1803.05567*.
- Joel Hestness, Sharan Narang, Newsha Ardalani, Gregory Diamos, Heewoo Jun, Hassan Kianinejad, Md. Mostofa Ali Patwary, Yang Yang, and Yanqi Zhou. 2017. Deep learning scaling is predictable, empirically. *arXiv preprint arXiv:1712.00409*.
- Chris Hokamp, John Glover, and Demian Gholipour. 2019. Evaluating the supervised and zero-shot performance of multilingual translation models. *arXiv preprint arXiv:1906.09675*.

- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Larousilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. Parameter-efficient transfer learning for nlp. *arXiv preprint arXiv:1902.00751*.
- Po-Yao Huang, Frederick Liu, Sz-Rung Shiang, Jean Oh, and Chris Dyer. 2016. Attention-based multimodal neural machine translation. In *Proceedings of the First Conference on Machine Translation: Volume 2, Shared Task Papers*, volume 2, pages 639–645.
- Yanping Huang, Yonglong Cheng, Dehao Chen, HyounJoong Lee, Jiquan Ngiam, Quoc V Le, and Zhifeng Chen. 2018. Gpipe: Efficient training of giant neural networks using pipeline parallelism. *arXiv preprint arXiv:1811.06965*.
- Sébastien Jean, Orhan Firat, and Melvin Johnson. 2018. [Adaptive scheduling for multi-task learning](#). In *Advances in Neural Information Processing Systems, Workshop on Continual Learning*, Montreal, Canada.
- Melvin Johnson, Mike Schuster, Quoc V Le, et al. 2017. Google’s multilingual neural machine translation system: Enabling zero-shot translation. *Transactions of the Association of Computational Linguistics*, 5(1):339–351.
- Mahesh Joshi, Mark Dredze, William W. Cohen, and Carolyn Rose. 2012. [Multi-domain learning: When do domains matter?](#) In *Proceedings of the 2012 Joint Conference on Empirical Methods in Natural Language Processing and Computational Natural Language Learning*, pages 1302–1312, Jeju Island, Korea. Association for Computational Linguistics.
- Norman P. Jouppi, Cliff Young, Nishant Patil, et al. 2017. [In-datacenter performance analysis of a tensor processing unit](#).
- Lukasz Kaiser, Aidan N. Gomez, Noam Shazeer, Ashish Vaswani, Niki Parmar, Llion Jones, and Jakob Uszkoreit. 2017. [One model to learn them all](#). *CoRR*, abs/1706.05137.
- Nal Kalchbrenner and Phil Blunsom. 2013. [Recurrent continuous translation models](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 1700–1709, Seattle, Washington, USA. Association for Computational Linguistics.
- Zhuoliang Kang, Kristen Grauman, and Fei Sha. 2011. [Learning with whom to share in multi-task feature learning](#). In *Proceedings of the 28th International Conference on International Conference on Machine Learning, ICML’11*, pages 521–528, USA. Omnipress.
- Eliyahu Kiperwasser and Miguel Ballesteros. 2018. Scheduled multi-task learning: From syntax to translation. *Transactions of the Association for Computational Linguistics*, 6:225–240.
- James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, et al. 2017. Overcoming catastrophic forgetting in neural networks. *Proceedings of the national academy of sciences*, 114(13):3521–3526.
- Philipp Koehn. 2005. [Europarl: A Parallel Corpus for Statistical Machine Translation](#). In *Conference Proceedings: the tenth Machine Translation Summit*, pages 79–86, Phuket, Thailand. AAMT, AAMT.
- Julia Kreutzer and Artem Sokolov. 2018. [Learning to segment inputs for NMT favors character-level processing](#). *CoRR*, abs/1810.01480.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Gaurav Kumar, George Foster, Colin Cherry, and Maxim Krikun. 2019. [Reinforcement learning based curriculum optimization for neural machine translation](#). *CoRR*, abs/1903.00041.
- Brenden M. Lake, Ruslan R. Salakhutdinov, Jason Gross, and Joshua B. Tenenbaum. 2011. One shot learning of simple visual concepts. In *CogSci*.

- Surafel Melaku Lakew, Aliia Erofeeva, Matteo Negri, Marcello Federico, and Marco Turchi. 2018. [Transfer learning in multilingual neural machine translation with dynamic vocabulary](#). *CoRR*, abs/1811.01137.
- Guillaume Lample, Ludovic Denoyer, and Marc’Aurelio Ranzato. 2017. Unsupervised machine translation using monolingual corpora only. *arXiv preprint arXiv:1711.00043*.
- Giwoong Lee, Eunho Yang, and Sung Hwang. 2016. Asymmetric multi-task learning based on task relatedness and loss. In *International Conference on Machine Learning*, pages 230–238.
- Jason Lee, Kyunghyun Cho, and Thomas Hofmann. 2017. Fully character-level neural machine translation without explicit segmentation. *Transactions of the Association for Computational Linguistics*, 5:365–378.
- Xilai Li, Yingbo Zhou, Tianfu Wu, Richard Socher, and Caiming Xiong. 2019. [Learn to grow: A continual structure learning framework for overcoming catastrophic forgetting](#).
- Wang Ling, Isabel Trancoso, Chris Dyer, and Alan W Black. 2015. Character-based neural machine translation. *arXiv preprint arXiv:1511.04586*.
- David Lopez-Paz et al. 2017. Gradient episodic memory for continual learning. In *Advances in Neural Information Processing Systems*, pages 6467–6476.
- Yichao Lu, Phillip Keung, Faisal Ladhak, Vikas Bhardwaj, Shaonan Zhang, and Jason Sun. 2018. A neural interlingua for multilingual machine translation. *arXiv preprint arXiv:1804.08198*.
- Minh-Thang Luong, Quoc V Le, Ilya Sutskever, Oriol Vinyals, and Lukasz Kaiser. 2015. Multi-task sequence to sequence learning. *arXiv preprint arXiv:1511.06114*.
- Minh-Thang Luong and Christopher D Manning. 2016. Achieving open vocabulary neural machine translation with hybrid word-character models. *arXiv preprint arXiv:1604.00788*.
- Jiaqi Ma, Zhe Zhao, Xinyang Yi, Jilin Chen, Lichan Hong, and Ed H. Chi. 2018a. [Modeling task relationships in multi-task learning with multi-gate mixture-of-experts](#). In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD ’18, pages 1930–1939, New York, NY, USA. ACM.
- Qingsong Ma, Ondřej Bojar, and Yvette Graham. 2018b. Results of the wmt18 metrics shared task: Both characters and embeddings achieve good performance. In *Proceedings of the Third Conference on Machine Translation: Shared Task Papers*, pages 671–688.
- Andreas Maurer, Massimiliano Pontil, and Bernardino Romera-Paredes. 2016. The benefit of multitask representation learning. *Journal of Machine Learning Research*, 17:81:1–81:32.
- Tom M. Mitchell. 1997. [Machine learning](#). McGraw Hill series in computer science. McGraw-Hill.
- Grégoire Montavon, Wojciech Samek, and Klaus-Robert Müller. 2018. Methods for interpreting and understanding deep neural networks. *Digital Signal Processing*, 73:1–15.
- Hyeonseob Nam and Bohyung Han. 2015. Learning multi-domain convolutional neural networks for visual tracking. *CoRR*, abs/1510.07945.
- Graham Neubig and Junjie Hu. 2018. [Rapid adaptation of neural machine translation to new languages](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 875–880. Association for Computational Linguistics.
- Toan Q. Nguyen and David Chiang. 2017. Transfer learning across low-resource, related languages for neural machine translation. In *Proc. IJCNLP*, volume 2, pages 296–301.
- Alex Nichol, Joshua Achiam, and John Schulman. 2018. On first-order meta-learning algorithms. *arXiv preprint arXiv:1803.02999*.

- Myle Ott, Sergey Edunov, David Grangier, and Michael Auli. 2018. Scaling neural machine translation. *arXiv preprint arXiv:1806.00187*.
- S. J. Pan and Q. Yang. 2010. A survey on transfer learning. *IEEE Transactions on Knowledge and Data Engineering*, 22(10):1345–1359.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. [Bleu: a method for automatic evaluation of machine translation](#). In *Proceedings of 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.
- German Ignacio Parisi, Ronald Kemker, Jose L. Part, Christopher Kann, and Stefan Wermter. 2018. [Continual lifelong learning with neural networks: A review](#). *CoRR*, abs/1802.07569.
- Anastasia Pentina, Viktoriia Sharmanska, and Christoph H. Lampert. 2015. Curriculum learning of multiple tasks. In *The IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- A. Phillips and M Davis. 2009. [Tags for Identifying Languages](#). RFC 5646, RFC Editor.
- Emmanouil Antonios Platanios, Mrinmaya Sachan, Graham Neubig, and Tom Mitchell. 2018. Contextual parameter generation for universal neural machine translation. *arXiv preprint arXiv:1808.08493*.
- Emmanouil Antonios Platanios, Otilia Stretcu, Graham Neubig, Barnabás Póczos, and Tom M. Mitchell. 2019. [Competence-based curriculum learning for neural machine translation](#). *CoRR*, abs/1903.09848.
- Maja Popović. 2015. chrF: character n-gram f-score for automatic mt evaluation. In *Proceedings of the Tenth Workshop on Statistical Machine Translation*, pages 392–395.
- Matt Post. 2018. A call for clarity in reporting bleu scores. *arXiv preprint arXiv:1804.08771*.
- Ye Qi, Sachan Devendra, Felix Matthieu, Padmanabhan Sarguna, and Neubig Graham. 2018. When and why are pre-trained word embeddings useful for neural machine translation. In *HLT-NAACL*.
- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. Improving language understanding by generative pre-training.
- Maithra Raghu, Ben Poole, Jon Kleinberg, Surya Ganguli, and Jascha Sohl-Dickstein. 2017. On the expressive power of deep neural networks. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 2847–2854. JMLR. org.
- Prajit Ramachandran, Peter J Liu, and Quoc V Le. 2016. Unsupervised pretraining for sequence to sequence learning. *arXiv preprint arXiv:1611.02683*.
- Bharath Ramsundar, Steven Kearnes, Patrick Riley, Dale Webster, David Konerding, and Vijay Pande. 2015. Massively multitask networks for drug discovery. *arXiv:1502.02072*.
- Bernardino Romera-Paredes and Philip H. S. Torr. 2015. An embarrassingly simple approach to zero-shot learning. In *ICML*.
- Michael T Rosenstein, Zvika Marx, Leslie Pack Kaelbling, and Thomas G Dietterich. 2005. To transfer or not to transfer. In *NIPS 2005 workshop on transfer learning*, volume 898, pages 1–4.
- Aurko Roy, Ashish Vaswani, Arvind Neelakantan, and Niki Parmar. 2018. Theory and experiments on vector quantized autoencoders. *arXiv preprint arXiv:1805.11063*.
- Sebastian Ruder. 2017. [An overview of multi-task learning in deep neural networks](#). *CoRR*, abs/1706.05098.
- Sebastian Ruder, Joachim Bingel, Isabelle Augenstein, and Anders Søgaard. 2017. Learning what to share between loosely related tasks. *arXiv preprint arXiv:1705.08142*.
- Andrei A Rusu, Neil C Rabinowitz, Guillaume Desjardins, Hubert Soyer, James Kirkpatrick, Koray Kavukcuoglu, Razvan Pascanu, and Raia Hadsell. 2016. Progressive neural networks. *arXiv preprint arXiv:1606.04671*.

- Devendra Singh Sachan and Graham Neubig. 2018. Parameter sharing methods for multilingual self-attentional translation models. *Proceedings of the Third Conference on Machine Translation*.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2015. Improving neural machine translation models with monolingual data. *arXiv preprint arXiv:1511.06709*.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural machine translation of rare words with subword units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, volume 1, pages 1715–1725.
- Noam Shazeer, Youlong Cheng, Niki Parmar, et al. 2018. Mesh-tensorflow: Deep learning for supercomputers. In *Advances in Neural Information Processing Systems*, pages 10414–10423.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarczyk, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. 2017. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*.
- Noam Shazeer and Mitchell Stern. 2018. Adafactor: Adaptive learning rates with sublinear memory cost. *arXiv preprint arXiv:1804.04235*.
- Jonathan Shen, Patrick Nguyen, Yonghui Wu, et al. 2019. Lingvo: a modular and scalable framework for sequence-to-sequence modeling. *arXiv preprint arXiv:1902.08295*.
- Daniel L. Silver, Qiang Yang, and Lianghao Li. 2013. Lifelong machine learning systems: Beyond learning algorithms. In *AAAI Spring Symposium: Lifelong Machine Learning*.
- Shagun Sodhani, Sarath Chandar, and Yoshua Bengio. 2018. [On training recurrent neural networks for lifelong learning](#). *CoRR*, abs/1811.07017.
- Kaitao Song, Xu Tan, Tao Qin, Jianfeng Lu, and Tie-Yan Liu. 2019. Mass: Masked sequence to sequence pre-training for language generation. *arXiv preprint arXiv:1905.02450*.
- Anuroop Sriram, Heewoo Jun, Sanjeev Satheesh, and Adam Coates. 2017. Cold fusion: Training seq2seq models together with language models. *arXiv preprint arXiv:1708.06426*.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. Dropout: a simple way to prevent neural networks from overfitting. *The Journal of Machine Learning Research*, 15(1):1929–1958.
- Milos Stanojevic and Khalil Sima'an. 2014. [BEER: BEtter evaluation as ranking](#). In *Proceedings of the Ninth Workshop on Statistical Machine Translation*, pages 414–419, Baltimore, Maryland, USA. Association for Computational Linguistics.
- Emma Strubell, Ananya Ganesh, and Andrew McCallum. 2019. [Energy and policy considerations for deep learning in nlp](#).
- Ilya Sutskever, Oriol Vinyals, and Quoc V Le. 2014. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, pages 3104–3112.
- Xu Tan, Yi Ren, Di He, Tao Qin, Zhou Zhao, and Tie-Yan Liu. 2019. Multilingual neural machine translation with knowledge distillation. *arXiv preprint arXiv:1902.10461*.
- Sebastian Thrun and Tom M. Mitchell. 1995. Lifelong robot learning. *Robotics and Autonomous Systems*, 15(1):25 – 46. The Biology and Technology of Intelligent Autonomous Agents.
- Sebastian Thrun and Lorien Pratt, editors. 1998. *Learning to Learn*. Kluwer Academic Publishers, Norwell, MA, USA.
- Jörg Tiedemann. 2012. [Parallel data, tools and interfaces in OPUS](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC-2012)*, pages 2214–2218, Istanbul, Turkey. European Language Resources Association (ELRA).

- Jörg Tiedemann. 2018. Emerging language spaces learned from massively multilingual corpora. *arXiv preprint arXiv:1802.00273*.
- Jakob Uszkoreit, Jay M Ponte, Ashok C Popat, and Moshe Dubiner. 2010. Large scale parallel document mining for machine translation. In *Proceedings of the 23rd International Conference on Computational Linguistics*, pages 1101–1109. Association for Computational Linguistics.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in Neural Information Processing Systems*, pages 5998–6008.
- Ricardo Vilalta and Youssef Drissi. 2002. A perspective view and survey of meta-learning. *Artificial intelligence review*, 18(2):77–95.
- Oriol Vinyals, Charles Blundell, Timothy Lillcrap, Koray Kavukcuoglu, and Daan Wierstra. 2016. Matching networks for one shot learning. In *Proceedings of the 30th International Conference on Neural Information Processing Systems, NIPS’16*, pages 3637–3645, USA. Curran Associates Inc.
- Wei Wang, Taro Watanabe, Macduff Hughes, Tetsuji Nakagawa, and Ciprian Chelba. 2018a. Denoising neural machine translation training with trusted data and online data selection. *arXiv preprint arXiv:1809.00068*.
- Weiyue Wang, Jan-Thorsten Peter, Hendrik Rosendahl, and Hermann Ney. 2016. Character: Translation edit rate on character level. In *Proceedings of the First Conference on Machine Translation: Volume 2, Shared Task Papers*, volume 2, pages 505–510.
- Yining Wang, Jiajun Zhang, Feifei Zhai, Jingfang Xu, and Chengqing Zong. 2018b. [Three strategies to improve one-to-many multilingual translation](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2955–2960, Brussels, Belgium. Association for Computational Linguistics.
- Marlies van der Wees, Arianna Bisazza, and Christof Monz. 2017. Dynamic data selection for neural machine translation. *arXiv preprint arXiv:1708.00712*.
- Felix Wu, Angela Fan, Alexei Baevski, Yann N Dauphin, and Michael Auli. 2019. Pay less attention with lightweight and dynamic convolutions. *arXiv preprint arXiv:1901.10430*.
- Yonghui Wu, Mike Schuster, Zhifeng Chen, et al. 2016. Google’s neural machine translation system: Bridging the gap between human and machine translation. *arXiv preprint arXiv:1609.08144*.
- Hongyi Zhang, Yann N Dauphin, and Tengyu Ma. 2019. Fixup initialization: Residual learning without normalization. *arXiv preprint arXiv:1901.09321*.
- Jiajun Zhang and Chengqing Zong. 2016. Exploiting source-side monolingual data in neural machine translation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1535–1545.
- Yu Zhang and Qiang Yang. 2017. A survey on multi-task learning. *arXiv preprint arXiv:1707.08114*.
- Jie Zhou, Ying Cao, Xuguang Wang, Peng Li, and Wei Xu. 2016. Deep recurrent models with fast-forward connections for neural machine translation. *Transactions of the Association for Computational Linguistics*, 4:371–383.
- Michał Ziemski, Marcin Junczys-Dowmunt, and Bruno Poulliquen. 2016. The united nations parallel corpus v1.0. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC 2016)*, Paris, France. European Language Resources Association (ELRA).
- Barret Zoph, Deniz Yuret, Jonathan May, and Kevin Knight. 2016. Transfer learning for low-resource neural machine translation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1568–1575.

Language	Id	Language	Id	Language	Id
Afrikaans	af	Hebrew	iw	Polish	pl
Albanian	sq	Hindi	hi	Portuguese	pt
Amharic	am	Hmong	hmn	Punjabi	pa
Arabic	ar	Hungarian	hu	Romanian	ro
Armenian	hy	Icelandic	is	Russian	ru
Azerbaijani	az	Igbo	ig	Samoan	sm
Basque	eu	Indonesian	id	Scots_Gaelic	gd
Belarusian	be	Irish	ga	Serbian	sr
Bengali	bn	Italian	it	Sesotho	st
Bosnian	bs	Japanese	ja	Shona	sn
Bulgarian	bg	Javanese	jw	Sindhi	sd
Burmese	my	Kannada	kn	Sinhalese	si
Catalan	ca	Kazakh	kk	Slovak	sk
Cebuano	ceb	Khmer	km	Slovenian	sl
Chinese	zh	Korean	ko	Somali	so
Corsican	co	Kurdish	ku	Spanish	es
Croatian	hr	Kyrgyz	ky	Sundanese	su
Czech	cs	Lao	lo	Swahili	sw
Danish	da	Latvian	lv	Swedish	sv
Dutch	nl	Lithuanian	lt	Tajik	tg
Esperanto	eo	Luxembourgish	lb	Tamil	ta
Estonian	et	Macedonian	mk	Telugu	te
Filipino/Tagalog	tl	Malagasy	mg	Thai	th
Finnish	fi	Malay	ms	Turkish	tr
French	fr	Malayalam	ml	Ukrainian	uk
Frisian	fy	Maltese	mt	Urdu	ur
Galician	gl	Maori	mi	Uzbek	uz
Georgian	ka	Marathi	mr	Vietnamese	vi
German	de	Mongolian	mn	Welsh	cy
Greek	el	Nepali	ne	Xhosa	xh
Gujarati	gu	Norwegian	no	Yiddish	yi
Haitian_Creole	ht	Nyanja	ny	Yoruba	yo
Hausa	ha	Pashto	ps	Zulu	zu
Hawaiian	haw	Persian	fa		

Table 8: List of BCP-47 language codes used throughout this paper (Phillips and Davis, 2009).