

Memory-assisted prompt editing to improve GPT-3 after deployment

Aman Madaan^{*}, Niket Tandon^{*†}, Peter Clark[†], Yiming Yang

Language Technologies Institute, Carnegie Mellon University, Pittsburgh, PA, USA

[†] Allen Institute for Artificial Intelligence, Seattle, WA, USA

{amadaan, yiming}@cs.cmu.edu

{nikett}@allenai.org

Abstract

Large LMs such as GPT-3, while powerful, are not immune to mistakes, but are prohibitively costly to retrain. One failure mode is misinterpreting a user’s instruction (e.g., GPT-3 interpreting "What word is similar to *good*?" to mean a homonym, while the user intended a synonym). Our goal is to allow users to correct such errors directly through interaction – without retraining. Our approach pairs GPT-3 with a growing memory of cases where the model misunderstood the user’s intent and was provided with feedback, clarifying the instruction. Given a new query, our memory-enhanced GPT-3 uses feedback from similar, prior queries to enrich the prompt. Through simple proof-of-concept experiments, we show how a (simulated) user can interactively teach a deployed GPT-3, doubling its accuracy on basic lexical tasks (e.g., generate a synonym) where users query in different, novel (often misunderstood) ways. In such scenarios, memory helps avoid repeating similar past mistakes. Our simple idea is a first step towards strengthening deployed models, potentially broadening their utility.¹

1 Introduction

GPT-3 while powerful, is not immune to mistakes (Marcus, 2021). The typical remedy of retraining with more data is not easy for these huge models, due to the prohibitive cost and infrastructure requirements. In such cases, even if users observe the model making a mistake repeatedly, there are no avenues to provide feedback to the model.

One failure mode is misinterpreting a user’s instruction, or *intent*. For example, in Figure 1 the user has asked for a synonym, but the model misinterpreted the request as asking for a homonym. Depending on the user’s expertise, and dialect, tasks

^{*}Equal Contribution

¹Code and data is available at <https://github.com/madaan/memprompt>

Our memory enhanced GPT-3 implementation.

User: What word is similar to *good*?

GPT-3: The homonym of good is: wood.

User: "Similar to" means "with a similar meaning".

GPT-3: Noted [*writes to memory*]

User: What word is similar to *surprised*?

GPT-3: [*Retrieves and adds to prompt* "'Similar to' means 'with a similar meaning'"].

The synonym of surprised is: amazed.

Figure 1: This paper enhances GPT-3 performance by looking up questions with a similar intent that received any user feedback. Our approach is simple because only the prompt needs to be updated with the retrieved relevant feedback, and no retraining is necessary.

may be expressed in various ways, leading to potential misunderstandings when the model encounters a new dialect or a poorly worded task.

Our goal is to allow users to correct such errors directly through interaction, and without retraining. Our approach is to pair GPT-3 with a growing memory of cases where the model misunderstood user’s intent and was provided with corrective feedback. We use the feedback to clarify the intent of new questions. This feedback is question dependent, and thus the prompt for each sample is *edited* to adapt to the input. In this sense, our work can be seen as an instance of prompt engineering (Liu et al., 2021b) which involves editing the prompts. Our work adds interactivity to prompt engineering as it involves dynamically updating the prompt for every instance.

For systems deployed in the wild, the end users cannot be expected to give feedback on the correct output for a given input (e.g., they might not know how to solve the task in realistic settings, such as translation). To circumvent this, we have GPT-3 verbalize its *understanding of the user’s intent* (in addition to providing an answer), a skill learned using few-shot examples in the prompt. Now, the

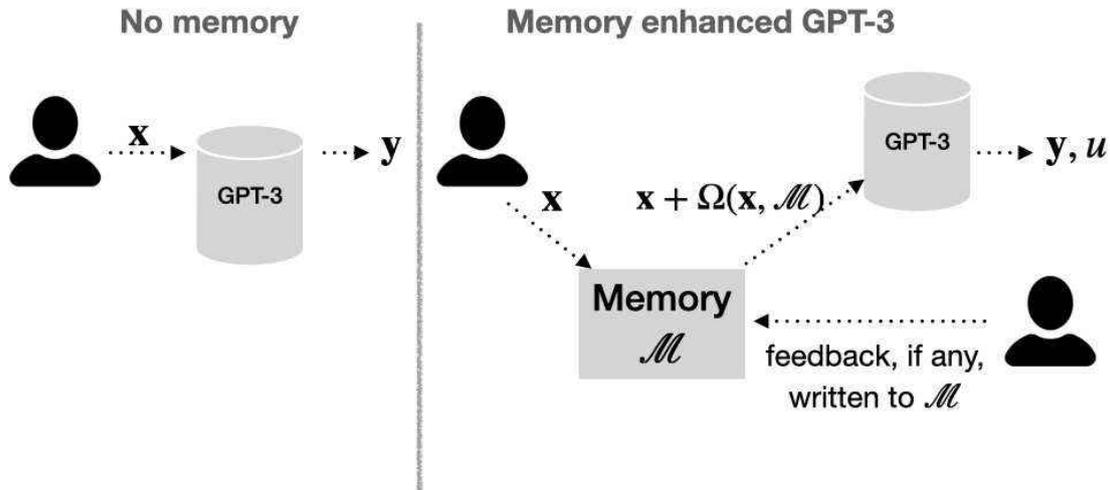


Figure 2: Proposed architecture: (left) GPT-3 does not account for user feedback. (right) MEM-PROMPT maintains a memory \mathcal{M} of corrective feedback, and searches for feedback from prior queries with a similar intent as x using a retrieval function Ω . x is then concatenated to the retrieved feedback and appended to the prompt for querying GPT-3. Users can also give new feedback on the model’s task understanding u , then added to \mathcal{M} .

user can see how the model interpreted their instructions, and provide corrective feedback **fb** if that interpretation was incorrect.

Figure 1 presents a sample interaction between a user and GPT-3 that our setup enables. The model was asked for a similar word. However, the model’s (incorrect) task understanding u was “The homonym of good is”. The user can detect such discrepancy between the intended and interpreted task instruction, and can provide feedback **fb** as “*similar to means with a similar meaning*”, clarifying that they actually wanted a synonym. Crucially, note that such instructional correction is feasible *even if the user does not know the correct answer to their question*, as they are critiquing the model’s understanding of their intent, rather the answers themselves. Thus, our setup **does not require** the users to be experts at tasks being solved, another advantage of our approach.

Further, it is desirable to have a system that can leverage past feedback on new, unseen examples for prompt-editing. To this end, we maintain a memory \mathcal{M} of such feedback as a set of key-value pairs, where the key is a misunderstood question, and the value is the user’s feedback to correct that misunderstanding. Given a new question, we check if the model has made a mistake on a similar question earlier, by querying the memory for a similar question. If found, append the corresponding feedback to the question prompt. This mechanism aims to prevent the model from making the same type

of mistake twice. This failure-driven reminding mechanism draws inspiration from the theory of recursive reminding in psychology (Jacoby and Wahlheim, 2013), which suggests humans index error corrections in the context in which those errors occurred.

This paper sets out the general architecture, along with simple, proof-of-concept implementations of its components. In a constrained setting, this implementation doubles GPT3’s accuracy on basic lexical tasks (e.g., generate a synonym) using simulated feedback, without retraining. Note that our implementation and demonstration are illustrative, not definitive - rather, our main contribution is the general framework itself, suggesting how user feedback might continuously improve model performance without retraining in a few-shot prompt setting.

2 Related work

Our method builds upon the recent advances in prompt-tuning and few-shot prompting.

Our use of recalled memories is a form of “prompt engineering”, where GPT-3’s behavior is modified by adding to the query (prompt) (Le Scao and Rush, 2021). While prior work has added selected QA examples to the prompt (Liu et al., 2021a), or even continuous vectors (Li and Liang, 2021), our novel contribution is using a growing repository of user feedback for prompt enhancement. Further, unlike existing work where the

| | End user can correct | Adaptive prompting per instance | Improves after deployment |
|-----------------------------------|----------------------|---------------------------------|---------------------------|
| Interactive prompt-editing (ours) | ✓ | ✓ | ✓ |
| Prompt-editing | ✗ | ✓ | ✓ |
| Prompt-tuning | ✗ | ✗ | ✗ |

Table 1: Positioning of our work w.r.t. related work. MEM-PROMPT is the first system that performs adaptive prompt-editing using user feedback to improve performance of GPT-3 after deployment, without re-training.

added prompt is fixed after deployment, our prompt can change dynamically at run-time. This further implies that the performance of our model is not fixed, but can instead grow with user interaction.

Similarly, our work can be seen as a form of retrieval-augmented QA. Extensive prior work has used retrievals from a text corpus to aid QA, e.g., (Pan et al., 2019; Guu et al., 2020), or retrievals of prior QA pairs for nearest-neighbor QA (Khandelwal et al., 2020). In contrast, we are retrieving from a dynamic memory of user feedbacks.

The idea of failure-driven reminding and dynamic memory date back several decades, e.g., (Schank, 1983; Riesbeck, 1981). Our work resurrects these ideas in a modern context.

Learning from instruction has also become important for large LMs, where models can perform a task based on direct instruction rather than examples (Wei et al., 2021; Mishra et al., 2021). Our work extends this by adding an adaptive component for when those instructions are misinterpreted. An additional contribution of our work is in proposing a novel strategy for taking feedback from the users in cases where the model misunderstands an instruction. Specifically, as part of the output, the model repeats its understanding of the instruction. While it may not be possible for an end user to provide meaningful feedback on the output itself, giving feedback on the understanding of the instruction is more feasible.

Finally, our work is a simple example of debugging and learning via dialog. While system debugging through dialog has been explored in many contexts, e.g., (Hixon et al., 2015; Wang et al., 2016; Davis, 1977), our novel contribution is dialog about the model’s understanding of the user’s intent.

3 Approach

3.1 Memory enhanced GPT-3 architecture

In our setup, given an input \mathbf{x} , a model generates an output \mathbf{y} and a sentence \mathbf{u} expressing its understanding of the task, a skill learned through few-shot examples in the prompt (Appendix B). The user can then critique \mathbf{u} by providing natural language feedback \mathbf{fb} . This is feasible even if the user does not know the correctness of \mathbf{y} because they are critiquing the *model’s understanding of their intent* rather the answers themselves.

Given a new query, MEM-PROMPT uses \mathbf{fb} from similar, prior queries to enrich the (few-shot) prompt \mathbf{p} . We use the principle that if x_i and x_j have similar errors (i.e., $x_i \sim x_j$), then their feedbacks \mathbf{fb}_i and \mathbf{fb}_j should be exchangeable ($x_i \sim x_j \Leftrightarrow \mathbf{fb}_i \sim \mathbf{fb}_j$). Fig. 2 gives an overview of MEM-PROMPT, with the following components:

Memory \mathcal{M} : \mathcal{M} is a growing table of key (x_i) - value (\mathbf{fb}_i) pairs that supports read, write, and lookup operations. The write operation is used whenever a user gives new feedback.

Lookup $\Omega(x, \mathcal{M})$: Ω is a learned retriever that matches the query= x against all the keys of \mathcal{M} .

Combiner $\mathcal{C}(x, \Omega(x, \mathcal{M}))$: A gating function allowing irrelevant, retrieved feedback to be ignored.

Prompter $\mathcal{P}(p, \mathcal{C})$: \mathcal{P} passes the output of \mathcal{C} to GPT-3 prompt.

Few-shot prompting Let us briefly recap few-shot prompting with GPT-3. Consider a general setup where given an input \mathbf{x} , a model is expected to generate an output \mathbf{y} . In a few-shot prompting mode (Brown et al., 2020), a prompt \mathbf{p} consists of k (\mathbf{x}, \mathbf{y}) “in-context” examples, i.e., $\mathbf{p} = \mathbf{x}_1.\mathbf{y}_1\#\mathbf{x}_2.\mathbf{y}_2 \dots \#\mathbf{x}_k.\mathbf{y}_k$, where $\#$ is a token separating examples. During inference, the user inputs a question \mathbf{x}_i , and the model is fed $\mathbf{p} \# \mathbf{x}_i$ (i.e., the question suffixed to the prompt) and is expected to generate the answer \mathbf{y}_i as a continuation.

\mathcal{P} supplements this few-shot prompting workflow, with a memory of user feedbacks from $\mathcal{C}()$. To enable the model to react to such feedback, we include k samples of the form $(\mathbf{x}, \mathbf{fb} \rightarrow \mathbf{u}, \mathbf{y})$ in the prompt, so the question contains \mathbf{fb} .

3.2 Tasks

We focus on two different categories of tasks: i) Word scrambling and manipulation introduced by Brown et al. (2020) (Section 3.9.2), and ii) lexical QA tasks. There are five tasks in each of the two categories, for a total of ten tasks. We describe the two tasks next.

Word scrambling and manipulation For this task, given a word with its characters transformed, the model is expected to recover the original characters. The transformations include reversal of words (*rev*, *yppup* → *puppy*), cycle letters in word (*cyc*, *atc* → *cat*), random insertions (*rand*, *c!r ic/ke!t* → *cricket*), and anagrams by changing all but the first and last (*anag1*, *eelhpnat* → *elephant*) or all but the first and last 2 characters (*anag2*, *elapehnt* → *elephant*). We used the original dataset used by Brown et al. (2020).²

Lexical QA tasks These include five lexical QA tasks: synonym (*syn*), antonym (*ant*), homonym (*hom*, for our experiments, we define homonyms to be the set of words that have different spellings but identical pronunciation, like *ring* and *wring*), definition (*defn*), and sentence usage generation (*sent*). The sources for this dataset are listed in Appendix §C lists the sources for the dataset, and we release the dataset on the repository for this work.

We choose these tasks as each question can be asked in multiple ways (e.g., for synonym generation, the users might ask questions of the form *what is like*, *what has a similar sense*, *what is akin to*, *what is something like*, etc.) Further, unlike long-form generation tasks, we can fit a large number of samples in the prompt, providing a strong baseline that is used to compare our approach with. For each task, the prompt contains a few different variations, e.g., the variations for the homonym task include “*what is the homonym of <word> ?*”, “*what sounds like <word> ?*”. We create a dataset of $(\mathbf{x}, \mathbf{fb} \rightarrow \mathbf{u}, \mathbf{y})$ tuples using sentence templates, where \mathbf{fb} clarifies the task in \mathbf{x} . We then experiment in a **simulated** conversational setting, in which a user can ask the model \mathbf{x} (covering any of these five tasks). If the model gives the wrong answer to a query \mathbf{x} , then \mathbf{fb} is used as the simulated corrective feedback to the model.

The two categories also allow us to control for

²<https://github.com/openai/gpt-3/tree/master/data>

the divergence of the tasks. In the case of lexical tasks, the various tasks (synonyms, homonyms) can be described with similar, possibly ambiguous instructions. For example, for a question *what’s a word similar to ring*, the user can mean similar to be similar in meaning or similar in sound. In contrast, the tasks for word scrambling are harder to describe.

3.3 A Proof of Concept Implementation

Implementation of memory \mathcal{M} We implement \mathcal{M} using \mathbf{x} as the key and the corresponding feedback \mathbf{fb} as value. Given a question \mathbf{x}_i , if the user detects that the model has misunderstood the question, they may provide a \mathbf{fb}_i with probability $Pr(\mathbf{f}_i)$. The feedback is stored in a memory \mathcal{M} , with \mathbf{x}_i as the key and \mathbf{fb}_i as the value. For a subsequent question \mathbf{x}_j , the retriever Ω (described below) checks if a similar question appears in memory. If yes, then the corresponding feedback is attached with the question and fed to the model for generation.

For example, the model might misunderstand a question asking for synonym, e.g., *what is akin to fast ?* as one that requires antonyms. As mentioned, in our setup, the model generates its understanding of the task \mathbf{u} , and not just the answer to the question. The user, by inspecting $\mathbf{u} = \textit{The opposite of fast is:}$ might determine that the model has misunderstood them, and give feedback *i wanted a synonym*, which gets stored in \mathcal{M} . If a similar question (e.g., *what is akin to pretty ?*) is asked later by the same or a different user, the corresponding feedback (*i wanted a synonym*) is attached with the question to generate the answer. Figure 3 illustrates a sample memory for this task.

Implementation of retriever Ω An incorrect feedback might cause the model to make a mistake, thus necessitating a good retrieval function. In our setting, we use two different retrieval functions:

(1) Semantic similarity: the query is encoded using Sentence transformers (Reimers and Gurevych, 2019), and we use cosine distance with a threshold of 0.9 to find a matching key \mathbf{x}_m .

(2) Lexical similarity: We also experiment with low-resource settings for which trained retrieval is not an option. In such cases, we rely on heuristics for similarity matching (details in Appendix §D).

Implementation of combiner \mathcal{C} \mathcal{C} concatenates x and the feedback retrieved by Ω . We leave space for future work to do this gating in a more principled manner.

| Question | Feedback |
|------------------------------------|--|
| A word pronounced as fellow ? | I want a word that sounds similar! |
| What is dissimilar to delicious ? | Give me the reverse of delicious |
| What is a word like great ? | Wrong! I want something similar ✓ |
| How do I use melancholy ? | No...I wanted a sample sentence |
| What is on the lines of pretty ? | I was looking for a similar word |
| Could you expand on browser ? | I actually wanted a definition |

↑

1. Query the memory

q : What is akin to quick ?

↓

2. Retrieve relevant feedback

fb: Wrong! when I mention like, I want something similar

Figure 3: Sample snapshot of memory for lexical QA.

Implementation of prompt \mathcal{P} \mathcal{P} concatenates \mathcal{C} at the end of p . Future work can employ strategies in recent literature on prompt-fine tuning (Zhao et al., 2021) to best combine \mathbf{fb} with p e.g., deciding the position of p or format of \mathcal{C} 's output for best gains.

Although the model has not changed, adding \mathbf{fb} corrects its erroneous behavior because we provide a few positive “training” examples containing feedback ($\mathbf{x}, \mathbf{fb} \rightarrow \mathbf{u}, \mathbf{y}$) in the prompt (Appendix B).

4 Experiments

Baselines We compare our system, MEM-PROMPT (memory-assisted prompt editing) with two different baselines:

1. **NO-MEM** This is the standard GPT-3³ in few-shot prompting mode, with the suggested parameters (Appendix §A). Input is $\mathbf{p} \# \mathbf{x}_i$ (i.e., question \mathbf{x}_i appended to prompt \mathbf{p}). It generates answer \mathbf{y}_i and its understanding of the user’s intent \mathbf{u}_i .
2. **GROW-PROMPT**: Similar to NO-MEM, but the \mathbf{p} is continuously grown with a subset of memory \mathcal{M} that can fit within the prompt (max. 2048 tokens). The most recent subset of \mathcal{M} of memory inserted is inserted in the prompt.

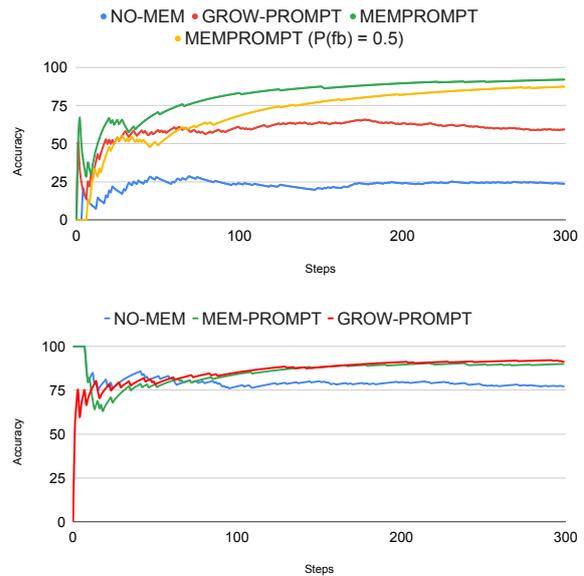


Figure 4: **Main result** Avg. performance over 300 data points on five lexical tasks (top) and word scramble tasks (bottom). The baselines are NO-MEM (in blue), which is GPT-3 in a few-shot setup. GROW-PROMPT (in red) appends the prompt with memory. MEM-PROMPT is shown in green. The horizontal axis records the number of steps (or equivalently time). For both the memory assisted systems (GROW-PROMPT and MEM-PROMPT), the accuracy increases with time as memory is filled up with feedback from past errors.

Metrics Our goal is not to improve the performance of the underlying model, rather to maximize

³We use GPT-3-175B (davinci) for all experiments.

| model | syn | ant | hom | sent | defn | all |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| NO-MEM | 0.58 | 0.43 | 0.13 | 0.30 | 0.39 | 0.37 |
| GROW-PROMPT | 0.71 | 0.87 | 0.75 | 0.92 | 0.76 | 0.80 |
| MEM-PROMPT | 0.99 | 0.98 | 0.98 | 0.98 | 0.96 | 0.98 |

Table 2: Baseline performance over 300 data points for lexical QA tasks. Across all tasks, MEM-PROMPT has the best performance.

| model | anag1 | anag2 | cyc | rand | rev | all |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| NO-MEM | 0.81 | 0.47 | 0.95 | 0.98 | 0.62 | 0.77 |
| GROW-PROMPT | 0.86 | 0.89 | 0.93 | 0.96 | 0.90 | 0.91 |
| MEM-PROMPT | 0.81 | 0.83 | 0.98 | 0.95 | 0.93 | 0.90 |

Table 3: Baseline performance over 300 data points for word scramble QA tasks. Across all tasks, GROW-PROMPT and MEM-PROMPT outperform NO-MEM.

the frequency with which it understands user instructions. To evaluate this, we compare gold u^* and generated u based on some hard-coded linguistic variations (e.g., *the antonym is matches the opposite is*). Failure to generate u is also considered incorrect. While we do not explicitly evaluate the accuracy of the task, we found a near-perfect correlation between the accuracy of y and u (i.e., if the GPT-3 understands the task correctly, the output was almost always correct). This is expected for large language models, which are the focus of our work.

Main result: Memory improves GPT-3 accuracy : Figure 4 reports the overall performance on the five lexical tasks overall. The accuracy improves substantially within 300 examples when using memory (in yellow) vs. no memory (in blue). Table 2 breaks down the performance by tasks. We note again that we are operating a few-shot prompting regime (i.e., there is no training data over which we train). The fact that the model saturates within 300 examples shows that our method can continue to improve. The performance of GROW-PROMPT (red) lies in between, showing that non-selective memory is partially helpful, although not as effective as failure-driven retrieval (our model). However, GROW-PROMPT is $\sim 3x$ more expensive (larger prompts) and cannot scale beyond the 2048 tokens limit. Our model MEM-PROMPT substantially outperforms both the baselines, showing the effectiveness of failure-driven reminding. We also found that the retrieved feedback from memory was effective 97% of the time; only in $\approx 3\%$ of cases feedback had no positive effect.

We also note that the performance gains achieved by MEM-PROMPT are less dramatic for word-level

tasks. This is explained by the fact that task descriptions for the word scrambling tasks are less ambiguous (Section §3.2), preventing the model from getting confused by users’ instructions.

Finding 1: Persistent use of memory accelerates performance: When the memory is used for every example (green line in Fig 4, top), the performance improves quickly as compared to the yellow line, where fb from memory is drawn with $Pr(fb) = 0.5$.

Finding 2: We also experimented using queries in Hindi and Punjabi, with (English) feedback clarifying the queries’ intent when GPT3 predictably misunderstands the task. Figure 5 confirms significant gains using memory in this OOV setting. This setup highlights the case when the user does not speak fluent English and uses mixed language code, e.g., transcription in English and mixing words from another language to ask questions.

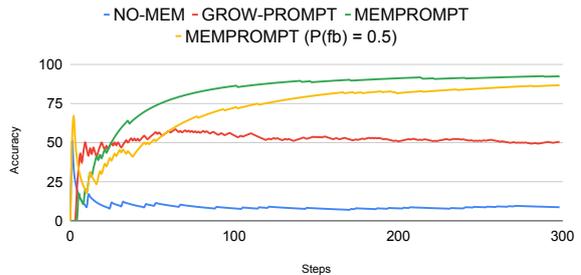


Figure 5: **Finding 2** Large gains on OOV setting by MEM-PROMPT over NO-MEM.

5 Conclusion

We have presented a simple, novel, memory-enhanced GPT-3 that allows users to interact and improve the model without retraining. A key insight is to have the model articulate not just its answer but also its understanding of the user’s intent, providing an avenue for feedback. Our implementation of system components are illustrative, not definitive; rather, the goal of this paper is to suggest a general architecture for future researchers, where more sophisticated component implementations can be designed. This architecture is significant as it suggests how deployed systems with fixed models can still be dynamically taught by interacting with end-users, potentially improving their performance and broadening their utility.

References

- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, and Others. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Randall Davis. 1977. Interactive transfer of expertise: Acquisition of new inference rules. *Artif. Intell.*, 12:121–157.
- Kelvin Guu, Kenton Lee, Z. Tung, Panupong Pasupat, and Ming-Wei Chang. 2020. Realm: Retrieval-augmented language model pre-training. *ArXiv*, abs/2002.08909.
- Ben Hixon, Peter Clark, and Hannaneh Hajishirzi. 2015. [Learning knowledge graphs for question answering through conversational dialog](#). In *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 851–861, Denver, Colorado. Association for Computational Linguistics.
- Larry L. Jacoby and Christopher N. Wahlheim. 2013. On the importance of looking back: The role of recursive reminders in recency judgments and cued recall. *Memory & Cognition*, 41:625–637.
- Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2017. Billion-scale similarity search with gpus. *arXiv preprint arXiv:1702.08734*.
- Urvashi Khandelwal, Omer Levy, Dan Jurafsky, Luke Zettlemoyer, and Mike Lewis. 2020. [Generalization through memorization: Nearest neighbor language models](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Teven Le Scao and Alexander Rush. 2021. [How many data points is a prompt worth?](#) In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2627–2636, Online. Association for Computational Linguistics.
- Xiang Lisa Li and Percy Liang. 2021. [Prefix-tuning: Optimizing continuous prompts for generation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4582–4597, Online. Association for Computational Linguistics.
- Bill Yuchen Lin, Wangchunshu Zhou, Ming Shen, Pei Zhou, Chandra Bhagavatula, Yejin Choi, and Xiang Ren. 2020. [CommonGen: A constrained text generation challenge for generative commonsense reasoning](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1823–1840, Online. Association for Computational Linguistics.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2021a. What makes good in-context examples for gpt-3? *ArXiv*, abs/2101.06804.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2021b. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ArXiv*.
- Gary Marcus. [Experiments testing gpt-3’s ability at commonsense reasoning: results](#). [online]. 2021.
- Swaroop Mishra, Daniel Khashabi, Chitta Baral, and Hannaneh Hajishirzi. 2021. Natural instructions: Benchmarking generalization to new tasks from natural language instructions. *ArXiv*, abs/2104.08773.
- Kim Anh Nguyen, Sabine Schulte im Walde, and Ngoc Thang Vu. 2016. [Integrating distributional lexical contrast into word embeddings for antonym-synonym distinction](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 454–459, Berlin, Germany. Association for Computational Linguistics.
- Xiaoman Pan, Kai Sun, Dian Yu, Jianshu Chen, Heng Ji, Claire Cardie, and Dong Yu. 2019. [Improving question answering with external knowledge](#). In *Proceedings of the 2nd Workshop on Machine Reading for Question Answering*, pages 27–37, Hong Kong, China. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- C. Riesbeck. 1981. Failure-driven reminding for incremental learning. In *IJCAI*.
- Roger Schank. 1983. *Dynamic Memory: A Theory of Reminding and Learning in Computers and People*. Cambridge University Press.
- Sida I. Wang, Percy Liang, and Christopher D. Manning. 2016. [Learning language games through interaction](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2368–2378, Berlin, Germany. Association for Computational Linguistics.
- Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. 2021. Finetuned language models are zero-shot learners. *ArXiv*, abs/2109.01652.

Tony Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. 2021. Calibrate before use: Improving few-shot performance of language models. *ArXiv*, abs/2102.09690.

A Querying GPT-3-175B using OpenAI API

We use the OpenAI API for querying GPT-3-175B.⁴ The python code is listed below. Here, "PROMPT" is set to prompt shown in §B, followed by the input question x and feedback fb if applicable.

```
import os
import openai

openai.api_key = os.getenv("OPENAI_API_KEY")

response = openai.Completion.create(
    engine="davinci",
    prompt="PROMPT",
    temperature=0.7,
    max_tokens=64,
    top_p=1,
    frequency_penalty=0,
    presence_penalty=0
)
```

B Prompt

GPT3 is queried using a prompt p of example i/o behaviors, followed by the actual question x and (optionally) retrieved feedback fb . It then generates the understood intent u and answer y as a continuation. u and y are expressed a single sentence, e.g., "[The synonym for <word> is] [<word>]" Figure 6 shows this prompt p , containing a mixture of $(x \rightarrow u, y)$ and $(x, fb \rightarrow u, y)$ "training" tuples.

C Datasets for lexical question-answering tasks

As mentioned in Section §4, we focus on five different linguistic QA tasks. The source of data for each of these tasks is listed below:

1. The synonyms (syn) and antonyms (ant) were obtained from Nguyen et al. (2016).⁵
2. The homonyms (hom) were obtained using homz <https://github.com/cameronehrlich/homz>. We use the closest homonym returned by homz for each word in the English dictionary.
3. The definitions (defn) were sourced from *The Online Plain Text English Dictionary* <https://github.com/eddydn/DictionaryDatabase>

⁴<https://beta.openai.com/docs/introduction>

⁵<https://www.ims.uni-stuttgart.de/en/research/resources/experiment-data/lexical-contrast-dataset/>

4. Examples for usage in a sentence (sent) are from CommonGen (Lin et al., 2020).

C.1 Templates

We manually created 15 task templates with three variants of phrasing the question for each task. Sample templates are shown in code listing 1. The data (word1, word2) in the code is initialized with the entries in the four sources mentioned above. The complete file is available in the anonymized code repository <https://anonymous.4open.science/r/memprompt-D548/templates.py>.

C.2 Sample questions

Tables 4, 5, and 5 list some sample x - y for settings where the question was asked as a linguistic variation, in Hindi, and in Punjabi, respectively.

D Finding similar questions in low-resource settings

In low-resource settings (e.g., queries in transcribed Punjabi or Hindi), we perform similarity matching between a given question and a question in the memory by using surface-form similarity. Specifically, we use Levenshtein distance to determine the closest query in the memory. We note that as the memory grows large, we can use mechanisms such as FAISS (Johnson et al., 2017) for trained memory, and suffix-trees for fast retrieval using surface form similarity.

E Sample results

Table 7 shows randomly sampled x - y pairs, and the corresponding y generated by GPT-3-175B and MEM-PROMPT. The complete set of outputs is located in the anonymized repository <https://anonymous.4open.science/r/memprompt-D548/results/results.csv>

What is the homonym for < wring > ?

the homonym for wring is ring END

how do you use < highway > in a sentence?

a sentence with highway is: soldiers stand guard along the [highway] END

can you define < camisole > ?

the definition of camisole is a sleeveless undergarment. END

What is the antonym for < prohibition > ?

the antonym for prohibition is permit END

What is the synonym for < surrogate > ?

the synonym for surrogate is substitute END

how do i use < fog > ? | clarification: when i ask for how do i use, i want a sentence.

a sentence with fog is: a rising sun burns the [fog] off a city END

What sounds like < sighted > ? | clarification: when I ask for sounds like, I want a homonym.

the homonym for sighted is cited END

what is like < provident > ? | clarification: when I ask for like, I want a synonym.

the synonym for provident is prudent END

can you define < rider > ? | clarification: when i ask for define, i want a definition.

the definition of rider is a person who is riding something. END

What is the opposite of < citation > ? | clarification: when I ask for opposite, I want an antonym.

the antonym for citation is award END

Figure 6: The prompt used for our tasks. During inference, an input question x_i , and optionally a feedback fb_i is appended after this prompt, and the model is expected to generate the answer y_i and its understanding of the question intent u_i as a continuation. The prompt contains examples of the form $(x \rightarrow u, y)$, expressed " $x \# u \ y \ END \ \#$ ", and $(x, fb \rightarrow u, y)$, expressed " $x \ | \ clarification: \ fb \ \# \ u \ y \ END \ \#$ ". (u and y are expressed together as a single sentence, e.g., "[The synonym for <word> is] [<word>].")

Find the right word after removing random letters from < t!r/e/a/s/u/r.e!s >

the word after removing symbols from t!r/e/a/s/u/r.e!s is treasures END

Find the original word after ignoring the punctuation and spaces in < e >

the word after removing symbols from e is elders END

Find the right word given this cycled word: < lprovisiona > ?

the uncycled version of lprovisiona is provisional END

Make a word while keeping the first and last char < vosiin > ?

the anagram 1 for vosiin is vision END

Find the original word that is interspersed in < f.i.n!e/p.i/x >

the word after removing symbols from f.i.n!e/p.i/x is finepix END

Find the right word given this rotated word: < cturalarchite > ?

the uncycled version of cturalarchite is architectural END

Find the original word after ignoring the punctuation and spaces in < s >

the word after removing symbols from s is straightforward END

Find the right word given this rotated word: < ibitioninh > ?

the uncycled version of ibitioninh is inhibition END

Figure out the word which has the same first two and the last two char < watsed > ? | clarification:
when I want you to figure out the word which has the same first two and the last two char, I
mean anagram 2.

the anagram 2 for watsed is wasted END

Make a word while keeping the first and last char < isucnase > ? | clarification: when I want
you to make a word while keeping the first and last char, I mean anagram 1.

the anagram 1 for isucnase is issuance END

Unscramble everything except the first two and the last two char < acotrs > ? | clarification:
when I want you to unscramble everything except the first two and the last two char, I mean
anagram 2.

the anagram 2 for acotrs is actors END

Figure 7: The prompt used for our word scrambling tasks derived from [Brown et al. \(2020\)](#)

```

1 templates = [
2   {
3     "type": "syn",
4     "template_id": "syn1",
5     "question": lambda word1: f"What is similar to < {word1} > ?",
6     "question_clarification": lambda word1: f"What is similar to < {word1} > ? |
clarification: when I ask for similar to , I want a synonym.",
7     "clarification": "clarification: when I ask for similar to , I want a synonym.",
8     "answer": lambda word1, word2: f"the synonym for {word1} is {word2}",
9   },
10  {
11    "type": "ant",
12    "template_id": "ant0",
13    "question": lambda word1: f"What is unlike < {word1} > ?",
14    "question_clarification": lambda word1: f"What is unlike < {word1} > ? |
clarification: when I ask for unlike , I want an antonym.",
15    "clarification": "clarification: when I ask for unlike , I want an antonym.",
16    "answer": lambda word1, word2: f"the antonym for {word1} is {word2}",
17  },
18  {
19    "type": "defn",
20    "template_id": "defn0",
21    "question": lambda word: f"< {word} > means what ?",
22    "question_clarification": lambda word: f"< {word} > means what ? | clarification:
when I ask for means what , I want a definition.",
23    "clarification": "clarification: when I ask for means what , I want a definition.",
24    "answer": lambda word, definition: f"the definition of {word} is {definition}",
25  },
26  {
27    "type": "sent",
28    "template_id": "sent1",
29    "question": lambda word: f"< {word} > can be used how ?",
30    "question_clarification": lambda word: f"< {word} > can be used how ? |
clarification: when I ask for can be used how , I want a sentence.",
31    "clarification": "clarification: when I ask for can be used how , I want a
sentence.",
32    "answer": lambda word, sentence: f"a sentence with {word} is: {sentence}",
33  }
]

```

Listing 1: "Sample templates for the five tasks."

| Question (x) | Answer (y) | type |
|---|---|------|
| What is the opposite of < misconstrue > ? | the antonym for misconstrue is verify | ant |
| What is the opposite of < gross > ? | the antonym for gross is polite | ant |
| expand on < chelicera > ? | the definition of chelicera is One of the anterior pair of mouth organs | defn |
| what is a sentence that can be used to define < mawseed > ? | the definition of mawseed is The seed of the opium poppy. | defn |
| what has a < bitt > like ring to it ? | the homonym for bitt is bit | hom |
| what can one confuse with < holed > ? | the homonym for holed is hold | hom |
| < spread > can be used how ? | a sentence with spread is: a couple of sheep are spread out in a field | sent |
| make something with < pot > ? | a sentence with pot is: bonsai tree in pot at zen garden . | sent |
| What is akin to < musician > ? | the synonym for musician is instrumental-ist | syn |
| What is akin to < zigzag > ? | the synonym for zigzag is move | syn |

Table 4: Sample x-y pairs in English. The same type of question can be asked in multiple ways.

| Question (x) | Answer (y) | type |
|---|--|------|
| < tabulate > ka ulta kya hai ? | the antonym for tabulate is randomize | ant |
| < foot > ka vilom kya hai ? | the antonym for foot is head | ant |
| < lettish > ka matlab kya hota hai ? | the definition of lettish is The language spoken by the Letts. See Lettic. | defn |
| < housing > ka arth kya hai ? | the definition of housing is An appendage to the hames or collar of a harness. | defn |
| sunne mai < perl > jaisa kya hai ? | the homonym for perl is pearl | hom |
| < council > jaisa kya sunai deta hai ? | the homonym for council is conceal | hom |
| < city > ko ek vakya mai kaise likhen ? | a sentence with city is: the city takes on an even more interesting hue during event | sent |
| < fly > ko ek vakya mai kaise likhen ? | a sentence with fly is: airplane fly into a storm cloud | sent |
| < critique > kai samaan kya hota hai ? | the synonym for critique is evaluate | syn |
| < psychiatric > kai samaan kya hota hai ? | the synonym for psychiatric is mental | syn |

Table 5: Sample x-y pairs in Hindi. The same type of question can be asked in multiple ways.

| Question (x) | Answer (y) | type |
|--|--|------|
| < edit > de ult ki hunda ae ? | the antonym for edit is expand | ant |
| < spring > ton bhin ki ae ? | the antonym for spring is compress | ant |
| < patricide > di paribhasha dasso ? | the definition of patricide is The crime of one who murders his father. Same as Parricide. | defn |
| < sankhya > da matlab ki hunda ae ? | the definition of sankhya is A Hindoo system of philosophy which refers all things to soul and a rootless germ called prakriti | defn |
| sunnan vich < site > varga ki ae ? | the homonym for site is sites | hom |
| < chance > da samnam ki ae ? | the homonym for chance is chants | hom |
| < enter > nu ek vak vich kidan vartiye ? | a sentence with enter is: as you enter you will be greeted by these rows of trees . | sent |
| < tree > da prayog ki ae ? | a sentence with tree is: wide shot of an eagle and its nest on top of a tree | sent |
| < unlawful > jidan ki hunda ae ? | the synonym for unlawful is illegal | syn |
| < constrict > jidan ki hunda ae ? | the synonym for constrict is close | syn |

Table 6: Sample x-y pairs in Punjabi. The same type of question can be asked in multiple ways.

| Question (x) | Expected answer (y *) | GPT-3 generated answer | MEM-PROMPT generated answer |
|---|--|--|---|
| give me something i would hear as < whether > ? | the homonym for whether is whither | the example of something you would hear as whether is a question word used to ask about possibilities. | the homonym for whether is weather |
| what has a < mane > like ring to it ? | the homonym for mane is made | the word that has a mane like ring to it is mane | the homonym for mane is main |
| What is like < confine > ? | the synonym for confine is hold | the homonym for confine is confined | the synonym for confine is restrain |
| < leper > means what ? | the definition of leper is a person affected with leprosy. | a sentence with leper is: a leper is a person with a disease that makes his skin scaly and white. | the definition of leper is a person who has leprosy. |
| expand on < chaperon > ? | the definition of chaperon is a matron who accompanies a young lady in public | the expansion of chaperon is one who chaperons. | the definition of chaperon is a woman who goes with a young girl to social functions. |
| what is a sentence that can be used to define < wassail > ? | the definition of wassail is an ancient expression of good wishes on a festive occasion | a sentence with wassail is: < wassail > wassails the christmas season | the definition of wassail is to drink to the health of. |
| expand on < paralbumin > ? | the definition of paralbumin is a proteidlike body found in the fluid from ovarian cysts and elsewhere. it is generally associated with a substance related to | the expansion of paralbumin is an albuminoid globulin occurring in the blood of the horse and other animals, and in the urine of humans. | the definition of paralbumin is a particular kind of albumin. |
| what can one confuse with < kew > ? | the homonym for kew is key | a word that can be confused with kew is due | the homonym for kew is cue |
| What is like < pneumatic > ? | the synonym for pneumatic is windy | the homonym for pneumatic is hydraulic | the synonym for pneumatic is airy |
| give me something i would hear as < seeder > ? | the homonym for seeder is seer | something you would hear as seeder is: someone who plants things in the ground or causes seeds to be planted. | the homonym for seeder is said |

Table 7: A subset of random samples where GPT-3-175B without memory was incorrect. The complete set of outputs is located in the anonymized repository <https://github.com/madaan/memprompt/results/results.csv>