

Zero-Shot Open Set Detection Based on a Pretrained Language-Vision Model

Sepideh Esmailpour¹, Bing Liu¹, Eric Robertson², Lei Shu^{1*}

¹ University of Illinois at Chicago

² PAR Government

sesmae2@uic.edu, liub@uic.edu, eric_robertson@partech.com, shulindt@gmail.com

Abstract

In a regular open set detection problem, samples of *known classes* (also called *closed set classes*) are used to train a special classifier. In testing, the classifier should (1) classify the test samples of known classes to their respective classes and also (2) detect samples that do not belong to any of the known classes (i.e., they belong to some *unknown* or *open set classes*). This paper studies the problem of *zero-shot open set detection*, which still performs the same two tasks in testing but has no training except using the given known class names. This paper proposes a novel and yet simple method (called ZO-CLIP) to solve the problem. ZO-CLIP builds on top of the recent advances in zero-shot classification through multi-modal representation learning. It first extends the pretrained language-vision model CLIP by training a text-based image description generator on top of CLIP. In testing, it uses the extended model to generate some candidate unknown class names for each test sample and computes a confidence score based on both the known class names and candidate unknown class names for zero-shot open set detection. Experimental results on 5 benchmark datasets for open set detection confirm that ZO-CLIP outperforms the baselines by a large margin.

Introduction

The primary assumption in conventional supervised learning (classification) is that the samples to be encountered at the test time are from the same classes (also called *known* or *seen classes*) that the model has observed and learned during training. However, this assumption is often violated when a machine learning model is deployed in the real world; i.e., in addition to the seen classes, samples from unseen classes may appear at test. The seen class samples are referred to as the *closed set samples* while unseen class samples are called *open set samples*. It is crucial for an intelligent ML model to detect open set samples specially in safety-critical applications such as autonomous driving or healthcare since detecting open set samples as closed set ones in such applications can have catastrophic consequences.

There are different directions in the literature tackling the open set detection problem. The earlier methods are mainly based on SVMs (Scheirer et al. 2012; Scheirer, Jain, and Boult 2014). Recent methods are mainly based on deep learning (Perera et al. 2020; Miller et al. 2021; Liang, Li,

and Srikant 2017) and try to solve the problem from different perspectives. Some discriminative models perform the detection by calibrating the confidence of the closed set classifier (Bendale and Boult 2016). Liang, Li, and Srikant (2017) proposed to use temperature scaling on the softmax score and perform post-processing on the test data to detect open set data. Lee et al. (2017) proposed a special training method for building closed set classifiers that can also detect open set samples at inference (Lee et al. 2017). Some generative models synthesize samples to represent possible unseen classes (Neal et al. 2018). These samples are then used to learn a $K + 1$ classifier where the space of unseen is assumed to be enclosed in the extra class. Other generative methods also exist (Andrews, Morton, and Griffin 2016; Chen et al. 2017), which detect open set samples based on the reconstruction error of the trained generative model for unseen samples. Perera et al. (2020) is a recent hybrid model based on generative-discriminative features.

Regardless of the approaches, the results on open set detection benchmarks indicate that the open set detection performance is directly affected by the accuracy of the closed set classifier. Particularly, when the closed set classifier does not use pretrained models, it is essential to train an accurate classifier from scratch for a descent open set detection performance. None of the aforementioned techniques use pretrained models as the backbone of their closed set classifiers. In fact, most of them essentially try to bound the hidden space representing the closed set classes. Then, the outer space can be considered as the open set space. This paper defines the *zero-shot open set detection* problem to take advantage of pretrained models. Given the set of seen class labels/names, \mathcal{Y}_s , the goal of zero-shot open set detection is to 1) classify each seen class test sample to one of the seen classes and 2) detect samples that do not belong to any of the seen classes. These are done based on only the names of seen classes in \mathcal{Y}_s . There is no given training data of the seen classes and thus no closed set classifier is built. *CLIP* (Radford et al. 2021) is a recently proposed pretrained language-vision model from OpenAI for zero-shot (closed set) image classification. It is trained by directly using the raw text for learning visual representations. CLIP is a multi-modal (image and text) transformer model which is trained by contrastive learning on a large set of 400 million image and caption pairs collected from the Internet. The

*Work was done prior to joining Amazon.

rich feature space shared by both image and text data enables zero-shot transfer to a range of down-stream tasks including image classification. CLIP model has an image encoder and a text encoder. Its zero-shot classification is done by matching the features from the image encoder to a set of text features from the text encoder. The text with the highest similarity score to the image is its predicted label. Although using CLIP eliminates the need for training a closed set classifier, it does not possess open set detection functionality in its original form. That is, it will match any given image to one of the given seen class labels. Therefore, to function in an open set setting, we need to present another set of candidate labels in addition to the seen class labels/names. The proposed method, called ZO-CLIP (Zero-shot Open set detection based on CLIP), does not need this set of candidate labels to represent possible open set labels as it can dynamically generate candidate open set labels for inference. ZO-CLIP works based on comparing the similarity of the semantic meaning of the given image to seen labels vs its similarity to the generated candidate labels, for which we need to add a text generator that does not exist in CLIP. To the best of our knowledge, existing open set detection baselines either 1) need to train a closed set classifier on seen classes using their labeled training data or 2) have prior knowledge about unseen classes for detection. ZO-CLIP requires neither of the two and therefore it is the first work performing zero-shot open set detection. In this work, we propose to:

- Extend the CLIP model by training a textual description generator on top of CLIP’s image encoder.
- Use the output of this generator as unseen candidate labels for a given test image.
- Define an open set confidence score based on the similarity of the image to the union of the *seen* labels and *generated* labels.

Our experimental results show that this simple method outperforms many state-of-the-art open set detection baselines trained using benchmark datasets. In addition to the supervised baselines, ZO-CLIP also outperforms the baselines that use the same pretrained backbone model as ZO-CLIP.

Related Work

Open-set vs Out-of-Distribution Detection

Out-Of-Distribution (OOD) detection and Open Set Detection are interchangeably used in the literature. The main difference in literature is that in the open set detection seen and unseen classes are often two splits of the same dataset (Oza and Patel 2019; Perera et al. 2020; Miller et al. 2021). For OOD detection, all seen samples (e.g., images of handwritten digits) are regarded as a single in-distribution class, while the OOD data to be detected is from a different dataset (e.g., images of animals) (Hendrycks and Gimpel 2016; Liang, Li, and Srikant 2017; Lee et al. 2018). That is, the OOD classes are often visually completely dissimilar to the in-distribution classes. On the other hand, the open set detection problem is more related to the open world classification problem where the model possesses the ability to detect samples from unseen classes and also it can be dynamically

updated to learn new classes in addition to the previously learned seen classes. This is done when sufficient data is collected representing an unseen class (Pernici et al. 2018; Xu et al. 2019).

Some OOD detection techniques are based on the idea of *outlier exposure*. These methods either assume the direct access to a small subset of the actual test OOD data at training (Liang, Li, and Srikant 2017) or rely on a large set of data points used as outliers at training (Hendrycks, Mazeika, and Dietterich 2018). However, in an open set detection setting, the model does not see any samples from unseen classes before deployment. From this perspective, an open set detection problem can be considered a harder problem to solve. Recently, some authors have made distinction between hard and easy OOD detection problems (Winkens et al. 2020). For instance, detecting CIFAR100 from CIFAR10 is called a *near*-OOD (hard) problem as they contain visually similar categories. Likewise, detecting CIFAR10 from SVHN (photographed digits dataset) is called a *far*-OOD (easy) problem as the categories are visually and semantically very different. Despite this distinction, using a validation set from the OOD data to tune the model parameters, is a common practice in many OOD detection approaches. In this paper, we solve the hard problem.

Transformer Model for OOD Detection

The success of pretrained transformer models (Vaswani et al. 2017; Devlin et al. 2018) in the natural language domain has motivated researchers to analyze their performance for out-of-distribution or out-of-scope detection in real world applications. Hendrycks et al. (2020) studies the OOD generalization and OOD detection performance of Bert for a range of NLP tasks. Their evaluation acknowledges that a pretrained transformer improves OOD detection upon conventional models which are merely as good as a random detector for OOD detection.

The vision transformer model (ViT) (Dosovitskiy et al. 2020) works in a similar way to a language transformer, i.e., it divides an image to consecutive patches and then uses regular transformer encoder to process these flattened patches as a sequence. ViT achieves on par to, or better performance than CNN-based methods like ResNets. A recent study (Fort, Ren, and Lakshminarayanan 2021) analyzes the reliability of OOD detection in ViT models. The authors show that ViT pretrained models fine-tuned on an in-distribution dataset significantly improve near OOD detection tasks. In addition, this work is the most related work to ours in the sense that it performs zero-shot OOD detection through CLIP. However, Fort, Ren, and Lakshminarayanan (2021) assume that a set of unseen labels are given as some weak information about OOD data. However, this is not practical in real world scenarios.

Method

We propose to solve the zero-shot open set detection problem by extending zero-shot CLIP (Radford et al. 2021), which is a closed set zero-shot classification method, to work in the open set setting. As mentioned in the introduction, the zero-shot CLIP model is not equipped with a

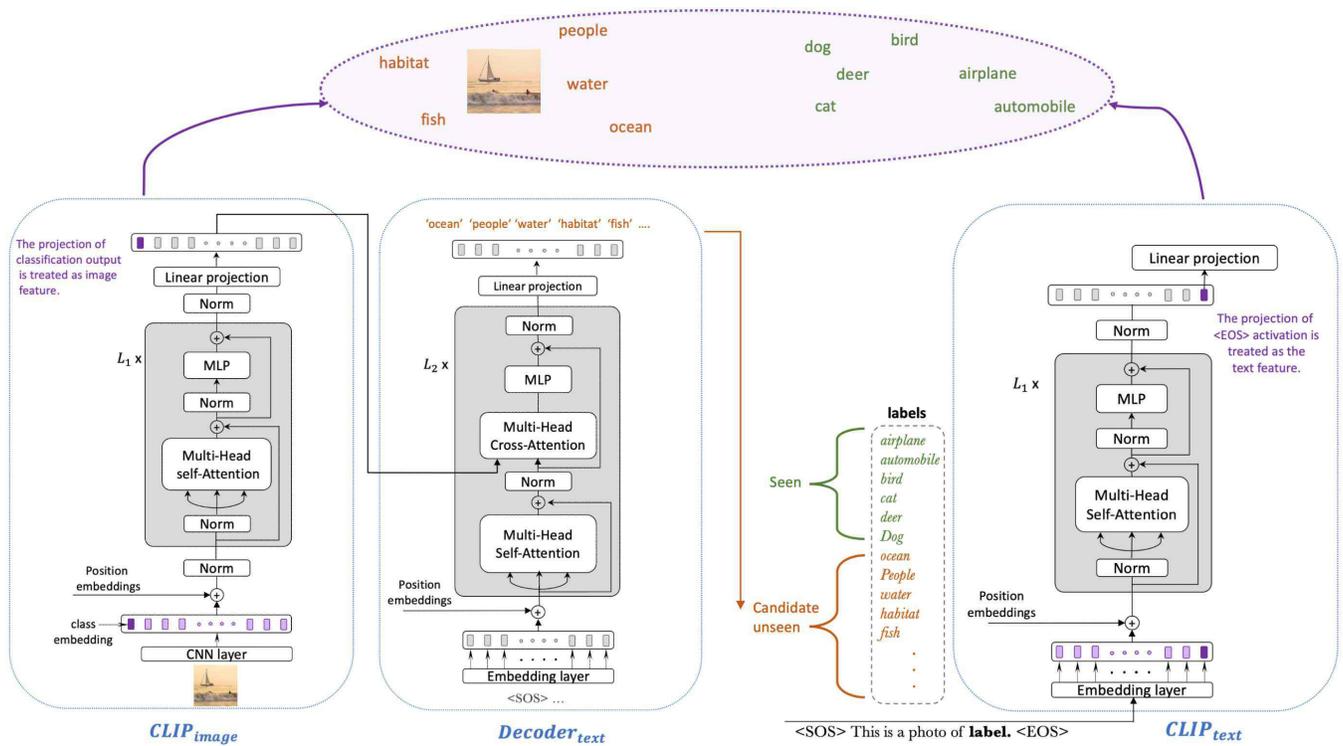


Figure 1: The diagram illustrates the inference steps of ZO-CLIP for a sample from an unseen class ‘boat’. The available seen class labels (shown in green) are $\mathcal{Y}_s = \{‘airplane’, ‘automobile’, ‘bird’, ‘cat’, ‘deer’, ‘dog’\}$. In the first step, the image is encoded through $CLIP_{image}$ and then image description is generated in the output of $Decoder_{text}$. The description is in fact a set of candidate unseen labels \mathcal{Y}_u (shown in orange). In the second step, $\mathcal{Y}_s \cup \mathcal{Y}_u$ are encoded through $CLIP_{text}$ on the right. The purple ellipsoid shows CLIP’s feature space where the relevant labels are aligned with the image. CLIP quantifies the alignment by calculating the cosine similarity of each encoded label to the encoded image. Then $S(x)$ is obtained according to 2. The score is high for this image as it is more similar to the set of \mathcal{Y}_u than \mathcal{Y}_s . The inference relies on CLIP pretrained encoders as well as \mathcal{Y}_u generated by $Decoder_{text}$.

specialized technique for open set detection. Although for any given closed set classifier, maximum softmax probability (MSP) (Hendrycks and Gimpel 2016) is commonly used as a baseline score for open set detection, we show in our experiments that our proposed method ZO-CLIP can significantly improve the detection performance. ZO-CLIP detects an open set test sample by comparing the image sample to two sets of label names. The first set is the set of seen labels, and the second set is the set of unseen labels which are unknown. ZO-CLIP trains a text description generator to obtain the second set. In the following, we briefly explain CLIP’s matching algorithm for closed set zero-shot classification and discuss its shortcomings for open set detection.

For zero-shot closed set classification in CLIP, we are only given a set of textual words as class labels $\mathcal{Y}_s = \{y_1, y_2, \dots, y_n\}$. For a test image, the multi-modal CLIP calculates the cosine similarity of the encoded image to each encoded textual description in the form of “{This is a photo of a $\langle y_i \rangle$,” e.g., “This is a photo of a dog,” “This is a photo of a cat,” etc. Taking the softmax over all the n similarity scores gives a categorical probability distribution that determines the label for the image. It is easily seen that any given image can be matched to one of the given (possibly

irrelevant) labels based on the maximum softmax score. As we can see, this method does not deal with zero-shot open set detection. To do so, we propose to present CLIP with another set of possible labels \mathcal{Y}_u for each test image sample for zero-shot matching. For this, we need a text-based image description generator. We train such a generator and use it to extract \mathcal{Y}_u from a given test image. The next question is how the second set \mathcal{Y}_u can assist in detecting an open set sample. We will show later how the seen (known) labels together with the dynamic set of \mathcal{Y}_u can be used to define a confidence score per test image.

Since CLIP does not have a text generator that can generate \mathcal{Y}_u for a given image, we propose to train one on top of CLIP’s image encoder using a large image captioning dataset. We explain the training of the generator next. We also call the *text generator* the *image description generator*.

Training the Image Description Generator

Since our image description generator uses the output features from the CLIP image encoder for training, we briefly describe the CLIP image encoder here. CLIP uses ResNet-50 (He et al. 2016) and the recently proposed vision transformer (ViT) (Dosovitskiy et al. 2020) as its image encoder

backbone. We found that the ViT backbone is more compatible with the task of sequence generation from a given image since it processes the image as a sequence of tokens similar to the transformer model (Vaswani et al. 2017). The ViT encoder in CLIP is a hybrid ViT architecture which uses a convolutional layer in the beginning to extract image features. Then, N feature maps are used as N embedding vectors to represent the image as a sequence of embeddings. A classification embedding vector is concatenated to the image embeddings similar to the CLS token in BERT model (Devlin et al. 2018). Then, positional embeddings are added and the output is passed to a transformer encoder (Vaswani et al. 2017) with L_1 layers. The hidden state z^{out} in the output is treated as the semantic representation of the whole image. We train the text generator on a large image captioning data which is a set of image and caption pairs. Text generator, which is a decoder, attends to the encoder output feature z^{out} in every layer of the decoder (see below). Please refer to Figure 1 for architecture details. Text decoder consists of L_2 stacked transformer layers. In each layer, the multi-head cross-attention sub-layer takes z^{out} as key and value for the scaled dot product attention mechanism. The output from the final layer of the decoder is projected through a linear layer to the vocabulary space of the decoder. Assuming the text decoder is parameterized with θ , the objective that we optimize is the cross-entropy loss at each position t in the sequence, conditioned on all previous positions:

$$L_{CE}(\theta) = - \sum_{t=1}^T \log(p_{\theta}(y_t^* | y_{1:t-1}^*; z^{out})) \quad (1)$$

This objective is optimized by forcing the predictions to stay close to the ground-truth sentence, which is the basic teacher forcing algorithm (Williams and Zipser 1989), i.e., the model simply conditions its next word prediction on previous ground-truth words (not previous *predicted* words). As we will explain in the next section, the output description from the decoder will eventually be processed to be used at the second step of inference. Therefore, a generated description with relevant words to the image is sufficient for our purpose. We refer to the decoder as $\text{Decoder}_{\text{text}}$ in the rest of the paper. $\text{Decoder}_{\text{text}}$ outputs a textual description for a given image based on the hidden state of the CLIP image encoder which we refer to as $\text{CLIP}_{\text{image}}$. In this regard, the image to sequence architecture is a full transformer model which has $\text{CLIP}_{\text{image}}$ on the encoder side and $\text{Decoder}_{\text{text}}$ on the decoder side (see Figure 1).

Inference in Testing

$\text{Decoder}_{\text{text}}$ is the central component for inference (testing) with our ZO-CLIP. The inference is performed in **lines 4-18** in Algorithm 1 which is composed of two steps. In the first step, $\text{Decoder}_{\text{text}}$ generates the image description for the given test image by attending to the image semantic representation in the output of $\text{CLIP}_{\text{image}}$. The generation follows the standard procedure of sequence to sequence models (predicting the next word based on the output of the model for the previous words until the maximum length is reached). ZO-CLIP requires to retrieve candidate unseen la-

Algorithm 1: Zero-shot Open-Set Detection

Require: set of seen labels \mathcal{Y}_s , $\text{CLIP}_{\text{text}}$, $\text{CLIP}_{\text{image}}$, $\text{Decoder}_{\text{text}}$, COCO dataset, set of test images D^{test} .

- 1: **Training**
- 2: initialize $\text{Decoder}_{\text{text}}$ model for sequence generation
- 3: fine-tune $\text{Decoder}_{\text{text}}$ on COCO captioning dataset
- 4: **Inference**
- 5: **for** $x^{\text{test}} \in D^{\text{test}}$ **do**
- 6: labels = \mathcal{Y}_s
- 7: description = $\text{Decoder}_{\text{text}}(x^{\text{test}})$.
- 8: $\mathcal{Y}_u = \text{topk}(\text{description})$
- 9: labels = $\mathcal{Y}_s \cup \mathcal{Y}_u$
- 10: logits $\leftarrow \emptyset$
- 11: **for** label \in labels **do**
- 12: desc = ‘This is a photo of a label.’
- 13: sim = cosine($\text{CLIP}_{\text{image}}(x^{\text{test}})$, $\text{CLIP}_{\text{text}}(\text{desc})$)
- 14: logits = logits \cup sim
- 15: **end for**
- 16: P = Softmax(logits)
- 17: $S(x^{\text{test}}) = 1 - \sum_{y \in \mathcal{Y}_s} P(y|x)$
- 18: **end for**

bels \mathcal{Y}_u from the generated description.¹ Since \mathcal{Y}_u is eventually used to define the confidence score for open set detection, we would like the retrieved words to be diverse and relevant to the input image. i.e, diversity results in a more reliable confidence score for detection. However, canonical inference methods such as greedy generation, beam search, nucleus sampling (Holtzman et al. 2019) or top-k sampling (Fan, Lewis, and Dauphin 2018) target to generate the best description rather than diverse descriptions. Since we need a holistic description of the image in general, the best description does not suit our purpose as it is not diverse enough. Thus, we do not limit the set of candidate labels \mathcal{Y}_u to be the same as the best generated description. Instead, we form \mathcal{Y}_u with some post-processing as follows: assuming the maximum generation length is T , at each position p_i of $\{p_1, p_2, \dots, p_T\}$, we pick the top k words from the vocabulary with highest probabilities. The union of all these words is \mathcal{Y}_u (**line 8 in Algorithm 1**). We fix k for all of our experiments. Then, we form the union of seen labels \mathcal{Y}_s and candidate unseen labels \mathcal{Y}_u (**line 9**).

The second step follows the CLIP zero-shot classification technique based on zero-shot labels $\mathcal{Y}_s \cup \mathcal{Y}_u$. Each $y_i \in \mathcal{Y}_s \cup \mathcal{Y}_u$ is put in the template (i.e., ‘‘This is a photo of a $\langle y_i \rangle$ ’’) required by CLIP. The text and the image are encoded through $\text{CLIP}_{\text{text}}$ and $\text{CLIP}_{\text{image}}$ and the cosine similarity of the encoded image and encoded label (in template) is calculated (**lines 11-15**). The softmax of all calculated similarities gives a probability distribution over $\mathcal{Y}_s \cup \mathcal{Y}_u$ (**line 16**). We define the open set confidence score (**line 17**)

¹The generated description may contain stop words, function words, etc. Since these words are present in every description, excluding/including them in \mathcal{Y}_u does not affect the AUROC score which is calculated based on the ranking of confidence score.

as follows:

$$S(x) = 1 - \sum_{y \in \mathcal{Y}_s} P(y|x) \quad (2)$$

where $P(y|x)$ is the softmax probability for label y . Thus, $S(x)$ is the accumulative probability of labels \mathcal{Y}_u . Even though ZO-CLIP inference is done in two steps, the implementation and usage of our technique is straightforward as the second step is done by querying the CLIP encoders.

Figure 1 is a graphical illustration of the inference procedure of ZO-CLIP. The used example describes how ZO-CLIP detects a sample as open set. The input image is from class ‘boat’ which is not among the seen labels and therefore it is an unseen class sample. It is interesting to note that the actual unseen label ‘boat’ is not among the set of candidate unseen labels, and yet ZO-CLIP uses other candidate unseen labels to come to the correct conclusion.

Experiments

Model Architecture and Training Details

As mentioned earlier, ZO-CLIP consists of three modules. The two encoders $\text{CLIP}_{\text{image}}$ and $\text{CLIP}_{\text{text}}$ are pretrained transformer models for image and text (Radford et al. 2021), respectively. We do not change or fine-tune the encoders. $\text{CLIP}_{\text{text}}$ is a base transformer model with 12 stacked layers and hidden size of 512. $\text{CLIP}_{\text{image}}$ is a hybrid ViT-base model using a convolutional layer in the beginning for feature extraction. The images are center-cropped and resized to have a size 224*224. A total of 7*7=49 embedding vectors with hidden size of 768 are generated from a given image. The transformer encoder in ViT also has 12 stacked layers. The output hidden state is projected from 768 dimensions to 512 dimensions to have the same size as $\text{CLIP}_{\text{text}}$. For the proposed $\text{Decoder}_{\text{text}}$, we choose the BERT large model from huggingface (Wolf et al. 2020) with 24 layers and hidden size of 1024. We train $\text{Decoder}_{\text{text}}$ using Adam optimizer (Kingma and Ba 2017) with a constant learning rate of 10^{-5} for 25 epochs. Batch size is 128. The training data for fine-tuning is the training split of MS-COCO (2017 release) (Lin et al. 2014)² which is the most commonly used dataset for image captioning task. We used MS-COCO validation dataset to choose the k value. We empirically found that the meaningful candidate unseen labels are present at top 35 level of the annotations. We used the basic teacher forcing method to train the $\text{Decoder}_{\text{text}}$ as it is sufficient for our purpose. There are other principled sampling approaches such as scheduled sampling (Bengio et al. 2015), professor forcing (Lamb et al. 2016), and self-critical training (Renzie et al. 2017) for training a sequence generation model. These approaches try to alleviate the exposure bias at test time, which is not a matter of concern in our task.

Datasets

We evaluate the performance of our proposed method on splits of CIFAR10, CIFAR100, CIFAR+10, CIFAR+50, and TinyImagenet. The difficulty level of an open set detection

²<https://cocodataset.org>

task is commonly measured by the *openness metric* defined in (Scheirer et al. 2012). A task is harder when more unseen classes are presented to the model at the test time. Openness is defined as follows:

$$\text{Openness} = \left(1 - \sqrt{\frac{2 * N_{\text{train}}}{N_{\text{test}} + N_{\text{target}}}}\right) * 100 \quad (3)$$

where N_{train} is the number of seen classes, N_{target} is the number of seen classes at testing and N_{test} is the total number of seen and unseen classes at test. For *CIFAR10* (Krizhevsky, Hinton et al. 2009)³ 6 classes are used as closed set (seen) classes. The 4 remaining classes are used as open set (unseen) classes. The reported score is averaged over 5 splits (Openness = 13.39%). For *CIFAR+10* (Krizhevsky, Hinton et al. 2009)⁴ 4 non-animal classes of CIFAR10 are used as closed set (seen) classes. 10 animal classes are chosen from CIFAR100 as the open set (unseen) classes. The reported score is averaged over 5 splits (Openness = 33.33). For *CIFAR+50* (Krizhevsky, Hinton et al. 2009)⁵ 4 non-animal classes from CIFAR10 are closed set. All 50 animal classes from CIFAR100 are used as the open set classes (Openness = 62.86%). For *TinyImagenet*. (Le and Yang 2015)⁶ 20 classes are used as the closed set (seen) classes. The remaining 180 classes are used as open set (unseen) classes. The reported score is averaged over 5 splits (Openness = 57.35%). For *CIFAR100* (Krizhevsky, Hinton et al. 2009)⁷ 20 classes are used as closed set. The 80 remaining classes are used as open set classes. The reported score is averaged over 5 splits. In each split, 20 consecutive classes are used as seen and the rest of classes used as unseen (Openness = 42.26%).

The class splits that we have used are publicly available in the github repository of (Miller et al. 2021)⁸ for all datasets except for CIFAR100. We generated the splits for CIFAR100 as explained above.

Baselines

We compare our method with 9 open set detection baselines. Each baseline either requires to train a closed set classifier or works based on a pretrained model as its backbone. In both cases, labeled training data is required. We are not aware of any existing zero-shot open set detection model except (Fort, Ren, and Lakshminarayanan 2021) which requires unseen class labels to be given for detection (the paper’s main focus is not zero-shot open set detection). Therefore, it is unsuitable for our open set detection setting, and thus is not included as a baseline.

DOC (Shu, Xu, and Liu 2017) is an early method originally proposed for open set detection (or recognition) of text data. It uses one-vs-rest sigmoid function in the output layer. It compares the maximum score over sigmoid outputs to a predefined threshold to reject or accept a test sample.

³<https://www.cs.toronto.edu/kriz/cifar.html>

⁴<https://www.cs.toronto.edu/kriz/cifar.html>

⁵<https://www.cs.toronto.edu/kriz/cifar.html>

⁶<http://cs231n.stanford.edu/tiny-imagenet-200.zip>

⁷<https://www.cs.toronto.edu/kriz/cifar.html>

⁸<https://github.com/dimitymiller/cac-openset>

	CIFAR10	CIFAR100	CIFAR+10	CIFAR+50	TinyImageNet
OpenMax (Bendale and Boulton 2016)	69.5±4.4	NR	81.7±NR	79.6±NR	57.6±NR
DOC (Shu, Xu, and Liu 2017)	66.5±6.0	50.1±0.6	46.1±1.7	53.6±0.0	50.2±0.5
G-OpenMax (Ge et al. 2017)	67.5±4.4	NR	82.7±NR	81.9±NR	58.0±NR
OSRCI (Neal et al. 2018)	69.9±3.8	NR	83.8±NR	82.7±0.0	58.6±NR
C2AE (Oza and Patel 2019)	71.1±0.8	NR	81.0±0.5	80.3±0.0	58.1±1.9
GFROR (Perera et al. 2020)	80.7±3.0	NR	92.8±0.2	92.6±0.0	60.8±1.7
CAC (Miller et al. 2021)	80.1±3.0	76.1±0.7	87.7±1.2	87.0±0.0	76.0±1.5
CSI (Tack et al. 2020)	87.0±4.0	80.4±1.0	94.0±1.5	97.0±0.0	76.9±1.2
G-ODIN (Hsu et al. 2020)	63.4±3.5	79.9±2.3	45.8±1.9	92.4±0.0	67.0±7.1
MSP (Hendrycks and Gimpel 2016)	88.0±3.3	78.1±3.1	94.9±0.8	95.0±0.0	80.4±2.5
Zero-shot open set detection(ours)	93.0±1.7	82.1±2.1	97.8±0.6	97.6±0.0	84.6±1.0

Table 1: Open-set detection performance in terms of AUROC. The results are averaged over 5 splits of each dataset (\pm standard deviation). We generated the results for DOC, CSI, G-ODIN and MSP. The results for the rest of the baselines are taken from (Miller et al. 2021).

OpenMax (Bendale and Boulton 2016) is an early technique for open set image recognition. It does calibration on the penultimate layer of the network to bound the open space risk.

G-OpenMax and *OSRCI* (Ge et al. 2017; Neal et al. 2018) are both generative models that use a set of generated samples to learn an extra class. So, the model is a $K + 1$ class classifier of seen and pseudo-unseen.

C2AE (Oza and Patel 2019) is a class-conditioned generative method that uses the reconstruction error of test samples as the detection score. *CAC* (Miller et al. 2021) is a latest method that uses anchored class centers in the logit space to encourage forming of dense clusters around each known/seen class. Detection is done based on the distance of the test sample to the anchored seen class centers in the logit space.

GFROR (Perera et al. 2020) combines the advantage of generative models with the recent advances in self-supervision learning methods.

G-ODIN (Hsu et al. 2020) is a recent method that uses a decomposed confidence score on top of its feature extractor for open set detection. The hyperparameters of the algorithm are tuned only on closed set classes.

CSI (Tack et al. 2020) combines contrastive learning, self-supervised learning, and various data augmentation techniques to train its model. It is a latest strong baseline.

MSP (Hendrycks and Gimpel 2016) uses maximum softmax probability as the natural open set detection score which can be used on top of any closed set classifier. Ideally, *MSP* is high on closed set classes and low for open set classes. *MSP* can be considered as a lower bound for *ZO-CLIP* performance.

The results for *OpenMax*, *G-OpenMax*, *C2AE* and *CAC* are taken from (Miller et al. 2021). We implemented and generated the results for *DOC*. We run official code for *CAC* to report results on *CIFAR100*. Note that all of these baselines use a CNN encoder architecture introduced in (Neal et al. 2018). For *CSI*, we used the official code to produce the results. *CSI* training involves learning a specific feature extractor based on 0, 90, 180, 270 rotations of every sample.

Therefore, other pretrained models like *CLIP* are incompatible for use by *CSI*. We thus use *CSI*’s original backbone (ResNet18). For *G-ODIN*, since the code is not released, we implemented the method by closely following their algorithm and hyper-parameters in the paper. For a fair comparison with *ZO-CLIP*, we used the pretrained ViT image encoder from *CLIP* as *G-ODIN*’s backbone. According to the table, *G-ODIN* cannot compete with *ZO-CLIP* or *MSP* because the authors of *G-ODIN* explicitly state that detecting semantic shift is a challenging setting for *G-ODIN*. For the *MSP* baseline which can be used on top of any pretrained classifier, we used *CLIP* zero-shot classification pipeline to generate the results.

Results and Discussion

The experimental results⁹ are summarized in Table 1. We use AUROC (Area Under the ROC curve) which is the most commonly used measure for evaluating open set detection performance. *ZO-CLIP* outperforms all supervised baselines by a large margin. A significant difference between *ZO-CLIP* and the other baselines is in that *ZO-CLIP* inference is based on dynamically generating candidate unseen labels for each sample, which gives *ZO-CLIP* a better detection capability. Since *ZO-CLIP* uses *CLIP*’s pretrained encoder for inference, one might attribute the performance gain to the rich feature space of *CLIP*. To investigate the gain, we set up an experiment with *MSP* (Hendrycks and Gimpel 2016) for *CLIP*. As mentioned earlier, *MSP* uses the maximum softmax score of zero-shot *CLIP* as the open set confidence score. This experimental setup assesses *CLIP*’s inherent ability for open set detection compared to *ZO-CLIP*’s inference technique. *ZO-CLIP*’s consistent performance gain over *MSP* on all datasets (Table 1) confirms that the proposed confidence score based on dynamic generation of unseen labels is better than *MSP* which uses identical inference procedure for all samples.

Note that we do not have a further ablation study as no part of the algorithm can be dropped for it to function.

⁹The code is included in the supplementary material.

20 seen class labels from ‘tinyimagenet’ dataset:

$Y_s = \{$ ‘potpie’, ‘kimono’, ‘school bus’, ‘go-kart’, ‘cliff dwelling’, ‘ice lolly’, ‘sandal’, ‘**espresso**’, ‘centipede’, ‘oboe’, ‘orange’, ‘German shepherd’, ‘beaker’, ‘obelisk’, ‘orangutan’, ‘bowtie’, ‘suspension bridge’, ‘vestment’, ‘frying pan’, ‘trolleybus’ $\}$

‘guacamole’ (unseen class)

‘espresso’ (seen class)

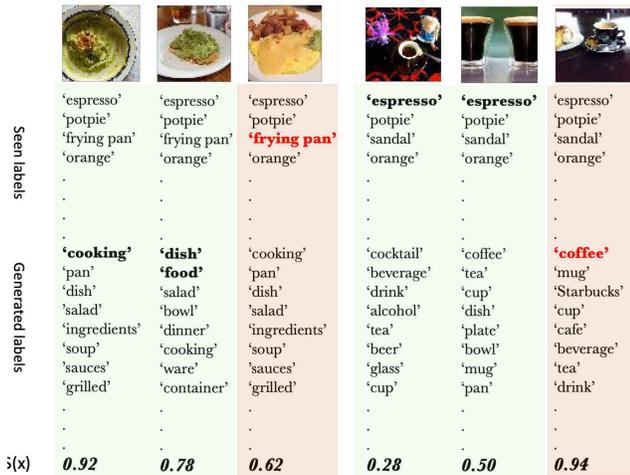


Figure 2: A summary of the generated labels for a seen class ‘espresso’ and an unseen class ‘guacamole’ from the TinyImagenet dataset are shown. The generated labels are ranked based on their contribution to $S(x)$. The labels with $(P(y|x) > 0.1)$ are in boldface. For class ‘espresso’, we expect the model to output a relatively low $S(x)$ as the actual label is present among seen labels (first two images). The third image is an error case. The set of generated labels and the label ‘coffee’ produce a high $S(x)$. For the unseen class ‘guacamole’, $S(x)$ is high for the first two images as expected since ZO-CLIP correctly associates the generated labels with the images. The third image is again an error case when a seen label ‘frying pan’ contributes to $S(x)$ more than the generated unseen labels.

Case study and error analysis. Figure 2 is a case study illustrating the actual seen and candidate unseen labels (generated for each sample) used in calculating the confidence score $S(x)$. We have picked one seen and one unseen class for comparison. Note that the actual label for a given image might/might not be among the generated labels. Particularly, this can happen when the unseen label is fine-grained and not present in the training corpus of MS-COCO. As a result, for an image with label ‘espresso’, the decoder generates relevant words such as ‘coffee’ rather than the label ‘espresso’ itself. Nevertheless, ZO-CLIP comes to the correct conclusion based on accumulative confidence score $S(x)$. Figure 3 illustrates the statistics of the calculated confidence score for 4 unseen and 2 seen classes.

We plan to use a larger corpus to train the image description generator in the future. In addition, since ZO-CLIP compares standalone candidate labels to the image, it does not account for relations between the unseen labels. Such relations might be an important tool for detecting more sophisticated open set samples. We will address this limitation in our future work.

20 seen class labels from ‘tinyimagenet’ dataset:

$Y_s = \{$ ‘potpie’, ‘kimono’, ‘**school bus**’, ‘go-kart’, ‘cliff dwelling’, ‘ice lolly’, ‘sandal’, ‘espresso’, ‘centipede’, ‘oboe’, ‘orange’, ‘German shepherd’, ‘beaker’, ‘obelisk’, ‘orangutan’, ‘bow tie’, ‘suspension bridge’, ‘**vestment**’, ‘frying pan’, ‘trolleybus’ $\}$

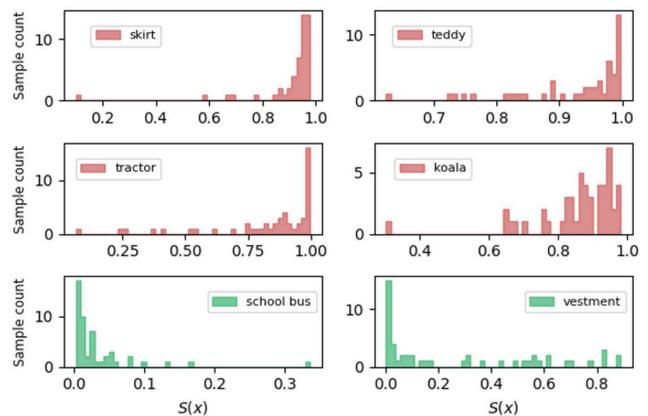


Figure 3: 20 seen labels from tinyimagenet are listed at the top. 4 classes ‘skirt’, ‘teddy’, ‘tractor’ and ‘koala’ are a subset of unseen classes. Each subplot shows the histogram of the confidence score $S(x)$. For instance, in the histogram for unseen class ‘skirt’, we can clearly see that more than 40 samples have confidence scores between 0.8 and 1 which is desirable for good detection performance. $S(x)$ tends to have a higher variance for the other 3 unseen class plots. It is interesting to note that for the samples from class ‘tractor’, the confidence score is relatively low because it is confused with semantically similar seen labels ‘school bus’ and ‘go-kart’. Similarly, low $S(x)$ for ‘koala’ mostly happen when the model associates the image with seen labels ‘orangutan’ and ‘German shepherd’. The confidence score for two seen classes ‘school bus’ and ‘vestment’ is distributed in lower ranges as expected.

Conclusion

In this paper, we introduced the new task of *zero-shot open set detection* based on the recent advances in zero-shot closed set classification using the pretrained model CLIP (Radford et al. 2021). Since it is a zero-shot problem, 1) no concrete samples are given for training except the known or seen class label names, and 2) samples from unseen classes of the open set may appear at the test time along with test samples of the seen classes. To solve the problem, we extended the CLIP model so that it can dynamically generate candidate unseen labels for every test image, and also defined a novel confidence score which is calculated based on the similarity of the test image to seen and generated candidate unseen labels in the feature space. Experimental results confirm that the proposed system ZO-CLIP is superior to the traditional supervised models. In addition, it also outperforms the baselines which use pretrained CLIP backbone as their encoders.

References

- Andrews, J. T.; Morton, E. J.; and Griffin, L. D. 2016. Detecting anomalous data using auto-encoders. *International Journal of Machine Learning and Computing*, 6(1): 21.
- Bendale, A.; and Boulton, T. E. 2016. Towards open set deep networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 1563–1572.
- Bengio, S.; Vinyals, O.; Jaitly, N.; and Shazeer, N. 2015. Scheduled sampling for sequence prediction with recurrent neural networks. *arXiv preprint arXiv:1506.03099*.
- Chen, J.; Sathe, S.; Aggarwal, C.; and Turaga, D. 2017. Outlier detection with autoencoder ensembles. In *Proceedings of the 2017 SIAM international conference on data mining*, 90–98. SIAM.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Dosovitskiy, A.; Beyer, L.; Kolesnikov, A.; Weissenborn, D.; Zhai, X.; Unterthiner, T.; Dehghani, M.; Minderer, M.; Heigold, G.; Gelly, S.; et al. 2020. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*.
- Fan, A.; Lewis, M.; and Dauphin, Y. 2018. Hierarchical neural story generation. *arXiv preprint arXiv:1805.04833*.
- Fort, S.; Ren, J.; and Lakshminarayanan, B. 2021. Exploring the Limits of Out-of-Distribution Detection. *arXiv preprint arXiv:2106.03004*.
- Ge, Z.; Demyanov, S.; Chen, Z.; and Garnavi, R. 2017. Generative openmax for multi-class open set classification. *arXiv preprint arXiv:1707.07418*.
- He, K.; Zhang, X.; Ren, S.; and Sun, J. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 770–778.
- Hendrycks, D.; and Gimpel, K. 2016. A baseline for detecting misclassified and out-of-distribution examples in neural networks. *arXiv preprint arXiv:1610.02136*.
- Hendrycks, D.; Liu, X.; Wallace, E.; Dzierdzic, A.; Krishnan, R.; and Song, D. 2020. Pretrained transformers improve out-of-distribution robustness. *arXiv preprint arXiv:2004.06100*.
- Hendrycks, D.; Mazeika, M.; and Dietterich, T. 2018. Deep anomaly detection with outlier exposure. *arXiv preprint arXiv:1812.04606*.
- Holtzman, A.; Buys, J.; Du, L.; Forbes, M.; and Choi, Y. 2019. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*.
- Hsu, Y.-C.; Shen, Y.; Jin, H.; and Kira, Z. 2020. Generalized odin: Detecting out-of-distribution image without learning from out-of-distribution data. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 10951–10960.
- Kingma, D. P.; and Ba, J. 2017. Adam: A Method for Stochastic Optimization. *arXiv:1412.6980*.
- Krizhevsky, A.; Hinton, G.; et al. 2009. Learning multiple layers of features from tiny images.
- Lamb, A. M.; Goyal, A. G. A. P.; Zhang, Y.; Zhang, S.; Courville, A. C.; and Bengio, Y. 2016. Professor forcing: A new algorithm for training recurrent networks. In *Advances in neural information processing systems*, 4601–4609.
- Le, Y.; and Yang, X. 2015. Tiny imagenet visual recognition challenge. *CS 231N*, 7(7): 3.
- Lee, K.; Lee, H.; Lee, K.; and Shin, J. 2017. Training confidence-calibrated classifiers for detecting out-of-distribution samples. *arXiv preprint arXiv:1711.09325*.
- Lee, K.; Lee, K.; Lee, H.; and Shin, J. 2018. A simple unified framework for detecting out-of-distribution samples and adversarial attacks. *Advances in neural information processing systems*, 31.
- Liang, S.; Li, Y.; and Srikant, R. 2017. Enhancing the reliability of out-of-distribution image detection in neural networks. *arXiv preprint arXiv:1706.02690*.
- Lin, T.-Y.; Maire, M.; Belongie, S.; Hays, J.; Perona, P.; Ramanan, D.; Dollár, P.; and Zitnick, C. L. 2014. Microsoft coco: Common objects in context. In *European conference on computer vision*, 740–755. Springer.
- Miller, D.; Sunderhauf, N.; Milford, M.; and Dayoub, F. 2021. Class Anchor Clustering: A Loss for Distance-Based Open Set Recognition. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 3570–3578.
- Neal, L.; Olson, M.; Fern, X.; Wong, W.-K.; and Li, F. 2018. Open set learning with counterfactual images. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 613–628.
- Oza, P.; and Patel, V. M. 2019. C2ae: Class conditioned auto-encoder for open-set recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2307–2316.
- Perera, P.; Morariu, V. I.; Jain, R.; Manjunatha, V.; Wington, C.; Ordonez, V.; and Patel, V. M. 2020. Generative-discriminative feature representations for open-set recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 11814–11823.
- Pernici, F.; Bartoli, F.; Bruni, M.; and Del Bimbo, A. 2018. Memory based online learning of deep representations from video streams. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2324–2334.
- Radford, A.; Kim, J. W.; Hallacy, C.; Ramesh, A.; Goh, G.; Agarwal, S.; Sastry, G.; Askell, A.; Mishkin, P.; Clark, J.; et al. 2021. Learning transferable visual models from natural language supervision. *arXiv preprint arXiv:2103.00020*.
- Rennie, S. J.; Marcheret, E.; Mroueh, Y.; Ross, J.; and Goel, V. 2017. Self-critical sequence training for image captioning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 7008–7024.
- Scheirer, W. J.; de Rezende Rocha, A.; Sapkota, A.; and Boulton, T. E. 2012. Toward open set recognition. *IEEE transactions on pattern analysis and machine intelligence*, 35(7): 1757–1772.
- Scheirer, W. J.; Jain, L. P.; and Boulton, T. E. 2014. Probability models for open set recognition. *IEEE transactions on pattern analysis and machine intelligence*, 36(11): 2317–2324.

- Shu, L.; Xu, H.; and Liu, B. 2017. Doc: Deep open classification of text documents. *arXiv preprint arXiv:1709.08716*.
- Tack, J.; Mo, S.; Jeong, J.; and Shin, J. 2020. Csi: Novelty detection via contrastive learning on distributionally shifted instances. *arXiv preprint arXiv:2007.08176*.
- Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention is all you need. In *Advances in neural information processing systems*, 5998–6008.
- Williams, R. J.; and Zipser, D. 1989. A learning algorithm for continually running fully recurrent neural networks. *Neural computation*, 1(2): 270–280.
- Winkens, J.; Bunel, R.; Roy, A. G.; Stanforth, R.; Natarajan, V.; Ledsam, J. R.; MacWilliams, P.; Kohli, P.; Karthikesalingam, A.; Kohl, S.; et al. 2020. Contrastive training for improved out-of-distribution detection. *arXiv preprint arXiv:2007.05566*.
- Wolf, T.; Debut, L.; Sanh, V.; Chaumond, J.; Delangue, C.; Moi, A.; Cistac, P.; Rault, T.; Louf, R.; Funtowicz, M.; Davison, J.; Shleifer, S.; von Platen, P.; Ma, C.; Jernite, Y.; Plu, J.; Xu, C.; Scao, T. L.; Gugger, S.; Drame, M.; Lhoest, Q.; and Rush, A. M. 2020. Transformers: State-of-the-Art Natural Language Processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, 38–45. Online: Association for Computational Linguistics.
- Xu, H.; Liu, B.; Shu, L.; and Yu, P. 2019. Open-world learning and application to product classification. In *The World Wide Web Conference*, 3413–3419.