

LANGUAGE MODELLING WITH PIXELS

Phillip Rust¹ Jonas F. Lotz^{1,2} Emanuele Bugliarello¹ Elizabeth Salesky³

Miryam de Lhoneux^{1,4,5} Desmond Elliott^{1,6}

¹University of Copenhagen ²ROCKWOOL Foundation Research Unit

³Johns Hopkins University ⁴Uppsala University

⁵KU Leuven ⁶Pioneer Centre for AI

p.rust@di.ku.dk

ABSTRACT

Language models are defined over a finite set of inputs, which creates a *vocabulary bottleneck* when we attempt to scale the number of supported languages. Tackling this bottleneck results in a trade-off between what can be represented in the embedding matrix and computational issues in the output layer. This paper introduces PIXEL, the **P**ixel-based **E**ncoder of **L**anguage, which suffers from neither of these issues. PIXEL is a pretrained language model that renders text as images, making it possible to transfer representations across languages based on orthographic similarity or the co-activation of pixels. PIXEL is trained to reconstruct the pixels of masked patches, instead of predicting a distribution over tokens.¹ We pretrain the 86M parameter PIXEL model on the same English data as BERT and evaluate on syntactic and semantic tasks in typologically diverse languages, including various non-Latin scripts. We find that PIXEL substantially outperforms BERT on syntactic and semantic processing tasks on scripts that are not found in the pretraining data, but PIXEL is slightly weaker than BERT when working with Latin scripts. Furthermore, we find that PIXEL is more robust to noisy text inputs than BERT, further confirming the benefits of modelling language with pixels.

1 INTRODUCTION

Natural language processing has rapidly progressed in recent years due to a combination of self-supervised representation learning, i.e. pretrained language models (PLMs) like BERT (Devlin et al., 2019), GPT-3 (Brown et al., 2020), and XLM-R (Conneau et al., 2020); large unlabelled datasets; such as C4 (Raffel et al., 2020), The Pile (Gao et al., 2020); and large-scale computing power (Hirschberg & Manning, 2015). Despite this progress, these models only cover a fraction of the world’s languages, with large inequalities in performance (Pires et al., 2019; Lauscher et al., 2020), and the majority of languages are falling behind English (Joshi et al., 2020b; Bugliarello et al., 2022). Even within English, these models struggle when tasked with processing noisy inputs (Sun et al., 2020; Eger & Benz, 2020). In this paper, we show how to effectively support *thousands* of written languages in a single model while being robust to variations caused by character-level noise.

Language models typically support a finite vocabulary of categorical inputs, e.g. characters, subwords or even words, and much effort has been devoted to vocabulary construction (Wan, 2022). On one end of the spectrum, a vocabulary over words has three problems: (i) it is not possible to encode out-of-vocabulary words because they lack an entry in a closed vocabulary, e.g. “doxing”, (ii) there are too many parameters in the word embedding layer, and relatedly, (iii) the normalising constant for the softmax activation in the output layer is too expensive to compute. On the other end of the spectrum, vocabularies over bytes or characters are much smaller, which leads to increased sequence lengths (Keren et al., 2022). In practice, most current models operate over inputs smaller than words but larger than characters: subword units (Sennrich et al., 2016; Kudo, 2018). Subwords prevent the problem of extremely large embedding and output layers, and support open vocabulary processing. While this is a practical solution in a monolingual context and for some languages like English, dealing with many languages with a variety of scripts will either result in a very large vocabulary or a trade-off over what is represented within a fixed number of subwords (see §5.1). Taken

¹See Appendix A for reconstructions of this abstract.

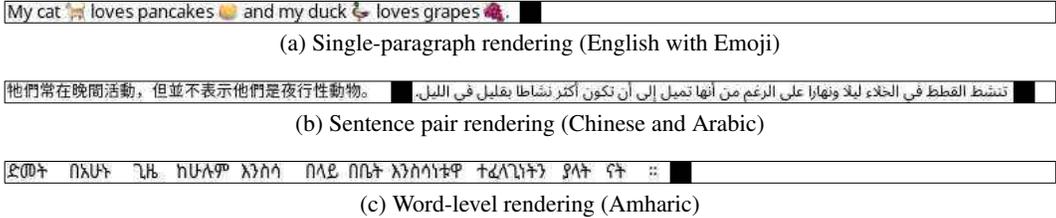


Figure 2: Illustrative examples of our rendered text. PIXEL natively supports most writing systems, colour emoji, and complex text layouts such as right-to-left writing and ligatures. Black patches serve as separators and end-of-sequence markers. Blank patches to the right of the end-of-sequence marker are treated as sequence padding. For word-level tasks such as the Amharic example above, horizontal spacing is added such that every image patch can be assigned to exactly one word.

2 APPROACH

The Pixel-based Encoder of Language, PIXEL, consists of three major components: a text renderer, which draws text as an image; an encoder, which encodes the unmasked regions of the rendered image; and a decoder, which reconstructs the masked regions at the pixel level. Figure 1 provides an illustration.

2.1 TEXT RENDERER

The key component of PIXEL is a text renderer that takes one or more pieces of text and renders them onto a blank RGB image $x \in \mathbb{R}^{H \times W \times C}$. We set height $H = 16$ and width $W = 8464$ and choose $C = 3$ RGB input channels, which is equivalent to a square colour image with a 368×368 resolution and corresponds to a sequence of 529 image patches of size 16×16 pixels.⁶ Figure 2 shows examples of text inputs rendered by the text renderer. The renderer supports (a) colour emoji and hieroglyphs scripts, (b) left-to-right and right-to-left writing systems, and (c) text that requires ligatures. Analogous to BERT, a sequence can either contain a single paragraph of text or a text pair; we use black 16×16 patches to serve as separators and end-of-sequence (EOS) markers. Blank (white) patches after the end-of-sequence marker are treated as padding by PIXEL, where no attention scores or losses are computed. Sequences longer than the maximum length are either truncated or split into multiple sequences. Further technical details about the renderer are provided in Appendix C.

2.2 ARCHITECTURE

PIXEL-base is a 112M parameter ViT-MAE architecture (He et al., 2022) with a 12-layer ViT encoder (Dosovitskiy et al., 2021) and an 8-layer Transformer decoder (Vaswani et al., 2017). The encoder has 86M parameters and the decoder has 26M parameters, respectively. The 8-layer decoder is not used for downstream tasks. We give an overview of the architecture below, with more details in Appendix D. We did not train larger PIXEL variants for lack of computational resources.

Patch Embeddings The images produced by the text renderer (§2.1) are linearly projected to obtain a sequence of patch embeddings with a 16×16 pixel resolution, to which fixed sinusoidal position embeddings are added.⁷

Patch Span Masking Instead of the random masking procedure used in ViT-MAE or block-wise masking in BEiT (Bao et al., 2022), PIXEL uses span masking with a 25% masking ratio as outlined in Algorithm 1, which masks spans of up to $S = 6$ consecutive image patches with a dynamic number of unmasked patches left between them. The idea behind the span masking approach, inspired by T5 (Raffel et al., 2020) and SpanBERT (Joshi et al., 2020a), is that it masks more meaningful

⁶We chose a sequence length of 529 so that the memory requirements at maximum length are approx. equal to those of BERT. Forward and backward passes of the transformer layers at equal length are also equally fast.

⁷This is a fast operation that does not require the large text embedding layer found in subword-based models, saving parameters which could in theory be re-allocated to the self-attention stack. We refer to Xue et al. (2022) for a discussion regarding benefits and drawbacks of re-allocation of embedding layer weights.

units of text (full words or phrases) than random masking where the model more often has to fill in (parts of) individual characters, thereby encouraging PIXEL to model a higher level of abstraction. In practice, span masking was slightly more effective than random masking in early prototypes of PIXEL. This effect may be less noticeable at higher masking ratios (such as the 75% used in ViT-MAE), when random masking would more often mask consecutive patches. We found 25% masking ratio to work well for PIXEL-base, which is in line with recent findings for BERT-type models of similar size (Wettig et al., 2022). We mask spans of $s \in \{1, 2, 3, 4\}$ patches in length, each with 20% probability, and spans of $s \in \{5, 6\}$ patches with 10% probability each, so $\mathbb{E}(s) = 3.1$.

Algorithm 1 PIXEL Span Masking

Input: #Image patches N , masking ratio R , maximum masked span length S , span length cumulative weights $W = \{w_1, \dots, w_S\}$
Output: Masked patches \mathcal{M}
 $\mathcal{M} \leftarrow \emptyset$
repeat
 $s \leftarrow \text{randchoice}(\{1, \dots, S\}, W)$
 $l \leftarrow \text{randint}(0, \max(0, N - s))$
 $r \leftarrow l + s$
 if $\mathcal{M} \cap \{l - s, \dots, l - 1\} = \emptyset$ **and**
 $\mathcal{M} \cap \{r + 1, \dots, r + s\} = \emptyset$ **then**
 $\mathcal{M} \leftarrow \mathcal{M} \cup \{l, \dots, r\}$
 end if
until $|\mathcal{M}| > R \cdot N$
return \mathcal{M}

Encoder Following ViT-MAE (He et al., 2022), the PIXEL encoder only processes unmasked patches (i.e., ≈ 396 “visible” patches at 25% masking) rather than on a sequence including mask tokens, which not only reduces memory requirements and increases training speed, but also has the advantage of not creating a mismatch between pretraining and finetuning. This mismatch would occur when training the encoder with inserted mask tokens because they are not inserted during finetuning (He et al., 2022). We also prepend the special CLS embedding to the unmasked patches.⁸ The resulting CLS and unmasked patches are processed by a 12-layer Transformer encoder to produce a sequence of encoder output representations.

Decoder The PIXEL decoder first projects the encoder outputs into the same space as the decoder model hidden size. It then inserts learnable mask embeddings at the masked positions; these are what PIXEL tries to reconstruct at the pixel level. Fixed sinusoidal position embeddings (Vaswani et al., 2017) are added to inject order information. After processing this sequence via 8 Transformer layers, a linear projection yields patch logits. Note that the decoder does not have to compute an expensive softmax over a subword vocabulary and circumvents the question of whether to tie the subword embedding weights. PIXEL is trained with a normalised mean squared error (MSE) pixel reconstruction loss measuring the discrepancy between normalised target image patches and reconstructed patches. This loss is only computed for *masked, non-blank (text)* patches.

2.3 PRETRAINING

PIXEL-base is pretrained on a rendered version of the English Wikipedia and the Bookcorpus (Zhu et al., 2015), which is roughly equivalent to the BERT pretraining setup.⁹ For better compute efficiency, we concatenate paragraphs until the maximum sequence length is reached, albeit not across document and book boundaries. In total, PIXEL is pretrained for 1M steps with batch size 256. The rendered Wikipedia has 2B words rendered into 11.4M examples and the Bookcorpus has 1.1B words rendered into 5.4M examples; in total ~ 3.1 B words (BERT used 3.3B) rendered into 16.8M examples. Therefore, PIXEL is pretrained for ~ 16 epochs. PIXEL is pretrained using the AdamW optimizer (Kingma & Ba, 2015; Loshchilov & Hutter, 2019) with a linear warmup over the first 50k steps to a peak learning rate of $1.5e-4$ and a cosine decay to a minimum learning rate of $1e-5$. Training PIXEL took 8 days on 8×40 GB Nvidia A100 GPUs. We show the loss curve and list additional pretraining details in Appendix D. We stored PIXEL checkpoints every 10k steps and make them available alongside the fully trained model on the HuggingFace Hub (Wolf et al., 2020), which we hope will be useful to analyze training dynamics of PIXEL models (Sellam et al., 2022). Figure 3

⁸In pretraining, no loss is computed for the CLS embedding but it can optionally be used when finetuning PIXEL for sequence-level downstream tasks.

⁹We use a similar Wikipedia dump Devlin et al. (2019) used for BERT (February 1, 2018) and a slightly newer version of the Bookcorpus available at <https://huggingface.co/datasets/bookcorpusopen>.

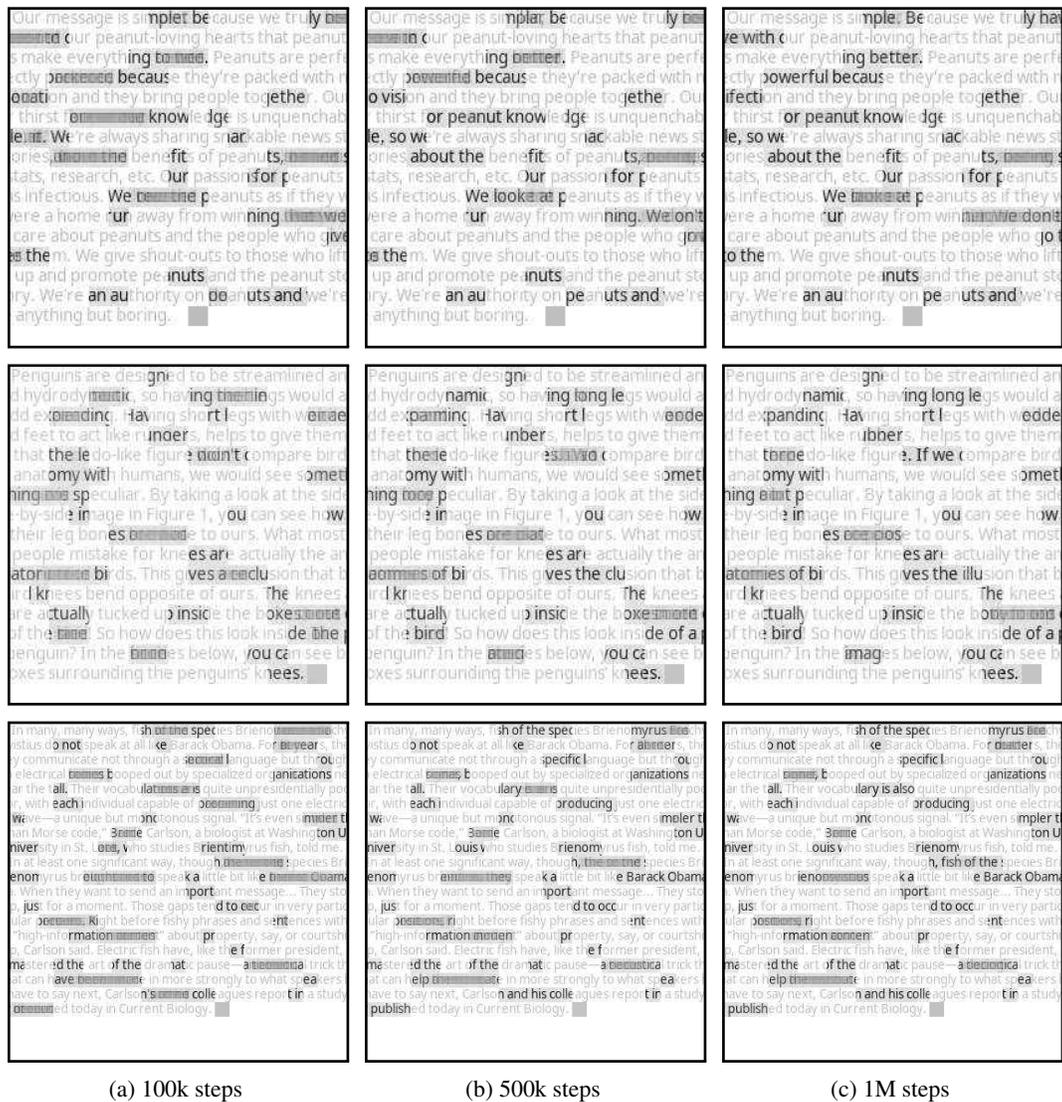


Figure 3: PIXEL image reconstructions after 100k, 500k, and 1M steps of pretraining. We overlay the masked original image with the model’s predictions. Images are wrapped into squares and resized for visualization purposes only. The texts were not part of the training data. We see that the fully trained PIXEL (1M) predicts masked spans more clearly and accurately. For longer spans with a larger possible prediction space, multiple predictions may appear together creating blurred text.

shows, for three unseen examples,^{10 11 12} how PIXEL learns to model language over the course of pretraining. The figure also shows how PIXEL (visually) expresses uncertainty, e.g. for reconstructions of long spans where the space of possible outputs is much larger than for short spans, and how it captures long-range dependencies. In the third row, we can for instance see that PIXEL uses context from the beginning of a sequence (*Barack Obama*) to correctly fill in a gap later in the sequence, and vice-versa (*Brienomyrus*).

¹⁰<https://www.nationalpeanutboard.org/peanut-info/our-message.htm>
¹¹<https://www.penguinsinternational.org/2019/07/10/do-penguins-have-knees-and-other-frequently-asked-questions/>
¹²<https://www.theatlantic.com/science/archive/2021/05/electric-fish-pause/618993/>

2.4 FINETUNING

PIXEL can be finetuned for downstream NLP tasks in a similar fashion to BERT-like encoders by simply replacing the PIXEL decoder with a suitable classification head. By truncating or interpolating the sinusoidal position embeddings, we can finetune with sequences shorter or longer than 529 patches, respectively. The latter, in particular, is common in computer vision applications to finetune on higher resolution images (Touvron et al., 2019; Kolesnikov et al., 2020; Dosovitskiy et al., 2021; He et al., 2022). For most common NLP tasks, we can typically finetune with sequences shorter than 529 to accelerate training while retaining performance. To demonstrate that PIXEL supports a variety of downstream tasks, we conduct finetuning experiments in four settings as follows:

Word Classification For word-level tasks like part-of-speech (POS) tagging and named entity recognition (NER), we render each word to the start of a new image patch so that we can create a bijective mapping between words and patches (see Figure 2 for an example).¹³ To finetune PIXEL on these images, we add a linear classifier with dropout. We assign the label of a word only to its first corresponding image patch and compute a cross-entropy loss with softmax.

Dependency Parsing For dependency parsing, we render text as above but obtain word-level representations by mean pooling over all corresponding image patches of a word and employ a biaffine parsing head (Dozat & Manning, 2017), following the implementation from Glavaš & Vulić (2021).

Sequence Classification For sequence-level tasks, e.g. in GLUE (Wang et al., 2018), we render text as in pretraining. For sentence-pair tasks like natural language inference (NLI) we separate the sentences with a black patch. We finetune with different strategies, including training a classifier on top of (1) the CLS embedding, (2) the mean-pooled or max-pooled representations of all patches, (3) a multi-head attention block. Although we did not notice significant performance differences between them in our experiments, we mainly used option (1), which is exactly the same as in BERT, and (2), which has been shown to work well for image classification (Liang et al., 2022).

Extractive Question Answering (QA) For extractive QA datasets like SQuAD (Rajpurkar et al., 2016), we render the question and context like in sequence-pair tasks above and use a sliding window approach where we create new examples from overflowing text with a stride instead of truncating the context. We use a linear classifier to predict the start and end patches of the span containing the answer. Appendix C explains how we obtain the mapping between characters and rendered text.

3 EXPERIMENTS

We finetune PIXEL on a variety of common NLP tasks and evaluate its syntactic and semantic processing capabilities in English, as well as its adaptability to unseen languages. Table 7 (Appendix E) gives an overview of the languages covered by our finetuning data and our language and data selection is also motivated below.

3.1 TASKS AND LANGUAGES

Syntactic Tasks We evaluate PIXEL on part-of-speech (POS) tagging and dependency parsing using data from Universal Dependencies v2.10 treebanks (Nivre et al., 2020; Zeman et al., 2022) for a set of typologically diverse languages that captures a large variety of unseen scripts¹⁴: Arabic

¹³This particular formulation assumes that word boundaries are available. We note, however, that subword-based and character-based models also make this assumption. In BERT, for instance, word-level tasks are formulated such that a word’s label is assigned to its first subword token, requiring word boundaries. During training, continuation tokens are then masked out when computing the loss. Consequently, predictions for continuation tokens also need to be masked out at inference time, which again requires word boundaries or aggregation strategies that may introduce errors. The same applies to character-based models. For PIXEL, should this assumption be violated, it is still possible to render the text without adding spacing, although the mapping is then no longer bijective as multiple words can overlap on one image patch. In such cases, assigning the prediction for a patch to either word can cause loss of information. Although in practice this approach does not necessarily affect performance negatively, future work will investigate alternative approaches.

¹⁴By unseen, we mean not present in the pretraining data.

(ARA), Coptic (COP), English (ENG), Hindi (HIN), Japanese (JPN), Korean (KOR), Tamil (TAM), Vietnamese (VIE), Chinese (ZHO).¹⁵ We compare how well PIXEL transfers to these languages compared to BERT. Note that BERT does not support all of these writing systems. However, both models have been trained on the same data. This comparison allows us to gauge the extent to which PIXEL can overcome the script barrier and vocabulary bottleneck of subword-based models.

Semantic Tasks We evaluate both monolingual (ENG) and cross-lingual *word-level* understanding on MasakhaNER (Adelani et al., 2021), a named entity recognition (NER) benchmark for 10 African languages (AMH, HAU, IBO, KIN, LUG, LUO, PCM, SWA, WOL, YOR), which also includes a copy of the ConLL-2003 dataset (ENG; Tjong Kim Sang & De Meulder, 2003). For monolingual ENG *sentence-level* understanding we rely on GLUE (Wang et al., 2018) and SQuAD (Rajpurkar et al., 2016). Finally, we evaluate cross-lingual sentence-level understanding on TyDiQA-GoldP (Clark et al., 2020) in the *in-language multitask* setting where we train on the combined gold data in all 9 target languages (ARA, BEN, ENG, FIN, IND, KOR, RUS, SWA, TEL) at once, and on two additional larger monolingual extractive question answering (QA) corpora: KorQuAD 1.0 (KOR; Lim et al., 2019) and JaQuAD (JPN; So et al., 2022).

3.2 BASELINES AND FINETUNING PROTOCOLS

We compare results to BERT-base which is trained on the same data.¹⁶ We do not compare to newer monolingual English models like ROBERTA (Liu et al., 2019), T5 (Raffel et al., 2020) or DEBERTA (He et al., 2021b;a) because these models have been pretrained longer on much larger corpora.¹⁷ Likewise, we do not compare against models trained on massively multilingual corpora. However, to contextualise the performance of PIXEL in cross-lingual settings, we report results for MBERT and, if results available, for CANINE (Clark et al., 2022).

For BERT, we use the standard finetuning protocols used by Devlin et al. (2019) and the same biaffine classifier for parsing as for PIXEL. We list finetuning details for all tasks in Appendix E.

3.3 RESULTS

Syntactic Tasks We present results for POS tagging and dependency parsing in Table 1. While BERT is slightly better than PIXEL in the monolingual setting (ENG), PIXEL clearly outperforms BERT in the remaining languages. On the lower end, the accuracy gap in favor of PIXEL in ARA and VIE, both languages covered by BERT’s vocabulary, is relatively small (~1%). On the higher end, in COP, where BERT has an out-of-vocabulary ([UNK]) token ratio of 93%, the gap is ~70% for both tasks. There is a strong correlation¹⁸ between the proportion of [UNK]s (shown in Table 1 on the right) and the performance gap, which shows that PIXEL overcomes BERT’s vocabulary bottleneck. These results are further analysed in Appendix F.

Semantic Tasks We present results for NER in Table 2, for GLUE in Table 3, for QA in Table 4. We also conduct experiments on XNLI in the *translate-train-all* setting which we present in Table 12 in Appendix F, for brevity. We find that BERT consistently achieves higher performance than PIXEL in their pretraining language ENG. Likewise, it often gains the upper hand for languages using the Latin writing system; for instance in NER where all languages besides AMH use Latin script, in QA for FIN, IND and SWA. Although BERT has more trainable parameters, this finding indicates that a PIXEL model pretrained for the same number of steps as BERT is slightly worse at semantic tasks, and it may require longer pretraining or an additional inductive bias to close the performance gap. Similarly, character-based models also tend to underperform subword-based models on NER (Keren et al., 2022), here seen by the CANINE-C results, suggesting that PIXEL may also benefit from a treatment equivalent to adding n-gram embeddings to boost entity memorisation capabilities (Clark et al., 2022).

¹⁵Table 9 in Appendix E gives an overview of the treebanks we use.

¹⁶We use BERT weights from <https://huggingface.co/bert-base-cased>.

¹⁷We do not intend to claim state-of-the-art performance, but to demonstrate that PIXEL is effective in overcoming the vocabulary bottleneck and to provide a starting point for further research on pixel-based encoding of language.

¹⁸Pearson correlation $r=0.9$, $p<0.001$ for POS tagging, $r=0.95$, $p<0.0001$ for dependency parsing.

	$ \theta $	ENG	ARA	COP	HIN	JPN	KOR	TAM	VIE	ZHO	[UNK]%	Fertility
<i>POS Tagging (Accuracy)</i>												
BERT	110M	97.2	95.4	26.5	86.4	87.9	60.0	45.4	84.5	58.6	0	1.2
PIXEL	86M	96.7	95.7	96.0	96.3	97.2	94.2	81.0	85.7	92.8	1.8	3.7
<i>Dependency Parsing (LAS)</i>												
BERT	110M	90.6	77.7	13.0	75.9	73.8	30.2	15.2	49.4	28.8	32.6	2.7
PIXEL	86M	88.7	77.3	83.5	89.2	90.7	78.5	52.6	50.5	73.7	45.5	1.5
											84.7	1.0
											82.3	1.3
											4.5	2.5
											73.2	1.5

Table 1: Results for PIXEL and BERT finetuned for POS tagging and dependency parsing on various Universal Dependencies treebanks. We report test set results averaged over 5 runs each. $|\theta|$ denotes the number of model parameters. The table on the right shows BERT’s proportion of [UNK]s as a measure of (inverse) vocabulary coverage and fertility (i.e., number of subwords per tokenized word; Ács, 2019; Rust et al., 2021) as a measure of over-segmentation in respective UD treebanks.

	#L	$ \theta $	ENG	AMH	HAU	IBO	KIN	LUG	LUO	PCM	SWA	WOL	YOR
MBERT*	104	179M	92.2	0	87.3	85.3	72.6	79.3	73.5	86.4	87.5	62.2	80.0
CANINE-C + n-gram*	104	167M	89.8	50.0	88.0	85.0	72.8	79.6	74.2	88.7	83.7	66.5	79.1
CANINE-C*	104	127M	79.8	44.6	76.1	75.6	58.3	69.4	63.4	66.6	72.7	60.7	67.9
BERT	1	110M	92.9	0	86.6	83.5	72.0	78.4	73.2	87.0	83.3	62.2	73.8
PIXEL	1	86M	89.5	47.7	82.4	79.9	64.2	76.5	66.6	78.7	79.8	59.7	70.7

Table 2: Results for PIXEL and BERT finetuned for NER on MasakhaNER. We report test set F_1 scores averaged over 5 runs each. BERT outperforms PIXEL in all of the languages that use Latin script, whereas PIXEL does better on AMH, whose script is not covered by BERT’s vocabulary. The performance gap is smaller for languages heavier in diacritics, e.g. YOR. It is larger for languages closer to English such as Naija Pidgin (PCM), an English-based creole. #L denotes the number of pretraining languages and * indicates results taken from Clark et al. (2022) for additional context.

Furthermore, for languages where BERT only partially covers the script, such as KOR, JPN and TEL in QA, PIXEL consistently outperforms BERT, sometimes by large amounts (e.g. , ~ 63 F_1 points better on KorQuAD). In the extreme case where BERT has no coverage of the language whatsoever, seen in NER for AMH, BERT completely fails (0 F_1) whereas PIXEL outperforms the larger, multilingually trained CANINE and performs competitively with its n-gram variant. In other words, PIXEL also overcomes the vocabulary bottleneck of subword-based PLMs in semantics-driven tasks. Note that although BERT was trained on English, its vocabulary has a high coverage of the Arabic script, explaining its good performance in ARA and URD.¹⁹

While the same may apply to languages like BEN and RUS in QA, where one may otherwise expect PIXEL to outperform BERT, there is an external factor at play; in the standard QA task formulation used by BERT, answer spans are extracted by predicting start and end tokens. We adopt this procedure in PIXEL for simplicity. However, an image patch will often overlap two words at variable positions, so the answer may actually start or end mid-patch. By only predicting on a full-patch level, and extracting the entire content of the patch, PIXEL will sometimes extract leading and trailing characters that should not be part of the answer, which degrades the F_1 score—even though the model may have correctly identified the span. Languages not using whitespace to delimit words are particularly affected, which also explains why PIXEL is only slightly better than BERT in JPN.

Generally, and in particular when transferring to unseen scripts, we find that PIXEL performs best when finetuning on larger corpora. An example of this behaviour can be seen in QA, where PIXEL performs significantly better on KorQuAD (60k examples) than the KOR subset of TyDi (1.6k examples). While large corpora may often not be available when dealing with unseen scripts, we hypothesize that multilingual pretraining will alleviate the need for long finetuning, while potentially

¹⁹Arabic is lexically sparse (Antoun et al., 2020; Al-Sallab et al., 2017), so the characters can be covered in the vocabulary. However, it is morphologically complex, which leads to over-segmentation, as the fertility of 3.7 in Table 1 shows. This over-segmentation is not necessarily problematic in our selection of tasks (Keren et al., 2022), e.g. due to the sliding window in QA, but can be a disadvantage in others (Rust et al., 2021).

	$ \theta $	MNLI-M/MM 393k	QQP 364k	QNLI 105k	SST-2 67k	COLA 8.6k	STS-B 5.8k	MRPC 3.7k	RTE 2.5k	WNLI 635	AVG
BERT	110M	84.0 / 84.2	87.6	91.0	92.6	60.3	88.8	90.2	69.5	51.8	80.0
PIXEL	86M	78.1 / 78.9	84.5	87.8	89.6	38.4	81.1	88.2	60.5	53.8	74.1

Table 3: Results for PIXEL and BERT finetuned on GLUE. We report *validation* set performance averaged over 5 runs. The metrics are F_1 score for QQP and MRPC, Matthew’s correlation for COLA, Spearman’s ρ for STS-B, and accuracy for the remaining datasets. We see that PIXEL achieves non-trivial performance scores on GLUE, indicating that *pixel-based encoders can learn higher-level semantic tasks*, but performs worse overall than BERT, so it may require (a) more pretraining steps than subword-tokenized PLMs or (b) an additional inductive bias to acquire the same level of monolingual abstraction.

	#L	$ \theta $	TyDiQA-GoldP										SQuAD	KorQuAD	JaQuAD
			ENG	ARA	BEN	FIN	IND	KOR	RUS	SWA	TEL	AVG	ENG	KOR	JPN
MBERT	104	179M	75.6	78.1	74.7	75.5	84.3	64.8	74.9	83.1	81.6	77.1	88.6	90.0	76.4
BERT	1	110M	68.5	58.0	43.2	58.3	67.1	12.4	53.2	71.3	48.2	51.5	88.2	14.9	28.8
PIXEL	1	86M	59.6	57.3	36.3	57.1	63.6	26.1	50.5	65.9	61.7	52.3	81.4	78.0	34.1

Table 4: Results for PIXEL and BERT finetuned on extractive QA datasets. We report validation set F_1 scores averaged over 5 runs each. Average (AVG) scores for TyDiQA-GoldP exclude ENG as customary (Clark et al., 2020). While BERT clearly outperforms PIXEL in ENG, PIXEL is much better in KOR, TEL, and JPN—a consequence of the vocabulary bottleneck in BERT—thereby gaining an edge on average. PIXEL strongly benefits from larger finetuning corpora as seen for KOR (1.6k training examples in TyDi versus 60k in KorQuAD). In some languages, PIXEL’s performance suffers due to how we currently extract answer spans from predicted patches (see §3.3 for an explanation), yielding suboptimal text outputs in spite of correct start and end patch predictions.

being even more conducive to *positive transfer* (Conneau et al., 2020; Chau et al., 2020; Pfeiffer et al., 2021) by not being vocabulary-bottlenecked.

4 ROBUSTNESS OF PIXEL

Informal text, commonly found on social media, often contains orthographic noise such as typos and other variations (Baldwin et al., 2015; van Esch et al., 2019; Caswell et al., 2020). Previous work has demonstrated the vulnerability of pretrained language models to character-level adversarial attacks and noise (Sun et al., 2020; Eger & Benz, 2020), with text normalization typically required to maintain performance (Pruthi et al., 2019; Keller et al., 2021). To evaluate PIXEL’s robustness to textual noise and variation and inspired by the robustness tests of Salesky et al. (2021), we experiment with the *Zeroé* benchmark (Eger & Benz, 2020)²⁰ which covers a variety of low-level orthographic attacks as illustrated in Table 5. We replace their version of visual attacks with the Unicode Technical Standard #39 set of visually-confusable characters.²¹ We apply *Zeroé* attacks during finetuning and evaluation of two different downstream tasks, POS tagging (English) and SNLI (Bowman et al., 2015), where we expect models to rely on different levels of abstraction.

Attack	Sentence
NONE	Penguins are designed to be streamlined
CONFUSABLE	P enguins are d esigned to be s reamlined
SHUFFLE (INNER)	Pegnuias are dneisged to be sietrnmlid
SHUFFLE (FULL)	ngePnius rae dsgeidnei to be etimaslemd
DISEMVOVEL	Pngns r dsngd to be strmlnd
INTRUDE	Pe'nguins a{re d}esigned to; b*e stre<amlined
KEYBOARD TYPO	Penguinz xre dwsigned ro ne streamlnid
NATURAL NOISE	Penguijs ard design4d ti bd streamlnfd
TRUNCATE	Penguin are designe to be streamline
SEGMENTATION	Penguinsaredesignedtobestreamlined
PHONETIC	Pengwains's ar dhiscind te be storimlignd

Table 5: Examples of low-level orthographic attacks based on the *Zeroé* benchmark.

Figures 4 and 9 show results across three levels of token-level noise comparing PIXEL and BERT. There is little impact on downstream performance on POS tagging with either model from most of the low-level attacks, with the exception of visually-confusable character substitutions

²⁰We use the updated version of the *Zeroé* benchmark from Keller et al. (2021)

²¹<https://util.unicode.org/UnicodeJsps/confusables.jsp>

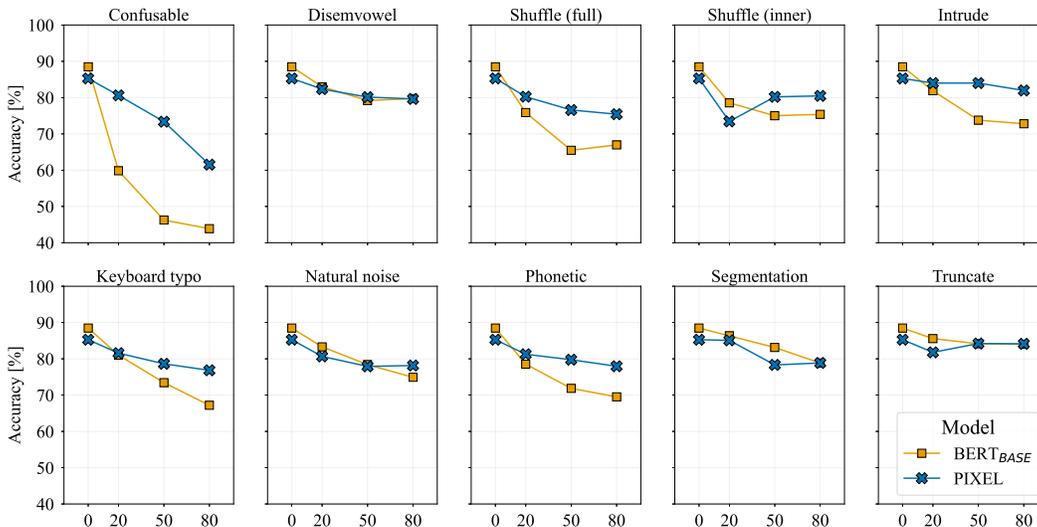


Figure 4: Test set accuracy for a single run of PIXEL and BERT across different levels of noise introduced through various orthographic attacks in SNLI. The results show that PIXEL is more robust than BERT to most of these attacks.

(CONFUSABLE), where PIXEL expectedly maintains performance above 92% as it can make use of the orthographic similarities but BERT drops to 38%. For SNLI, both models are negatively affected, but PIXEL exhibits less degradation than BERT with higher proportions of noise, with the impact varying across the different types of attacks which each have different effects on subword tokenization. Figure 5 shows relevancy heatmaps (Chefer et al., 2021) for predictions made with and without CONFUSABLE substitutions. The heatmaps are similarly clear in the presence of noise as without, providing qualitative evidence that PIXEL is indeed robust to the noise. The illustrated robustness to noise is dependent upon finetuning though, as we find that PIXEL can struggle in zero-shot applications when the text is rendered differently from what was seen during pretraining. Future work could explore the effects of applying data augmentation to the rendered text during pretraining on PIXEL’s ability to transfer across orthographies and adapt to textual noise. Furthermore, it would be interesting to investigate how the choice of font influences the search space during reconstruction of masked patches (Bland et al., 2022).

In addition to ensuring that models are robust to the variety of potential noise sources which are plentiful online (Caswell et al., 2020), the ability to generalize across character-level substitutions is important for effectively modelling different morphological forms; we find that pixel-based models perform as well as character-based models on a test suite of non-concatenative morphological phenomena (Amrhein & Sennrich, 2021). In addition to low-level attacks or noise at the character or token level, there are also many types of higher-level variation at the phrase or sequence level such as code-switching or the lexical substitutions seen in social media text.

5 RELATED WORK

5.1 VOCABULARY CONSTRUCTION IN MULTILINGUAL PLMS

The question of vocabulary construction is an open problem in NLP, especially in a multilingual context. See Mielke et al. (2021) for a recent, comprehensive survey on open-vocabulary modeling and tokenization. Here, we highlight the main methods, their limitations, and some attempts to overcome these limitations.

The most widely used language models, e.g. BERT (Devlin et al., 2019), RoBERTa (Liu et al., 2019), T5 (Raffel et al., 2020), GPT-2 (Radford et al., 2019), *inter alia*, rely on different tokenizers, such as WordPiece (Devlin et al., 2019), Byte-Pair Encoding (BPE; Sennrich et al., 2016) and

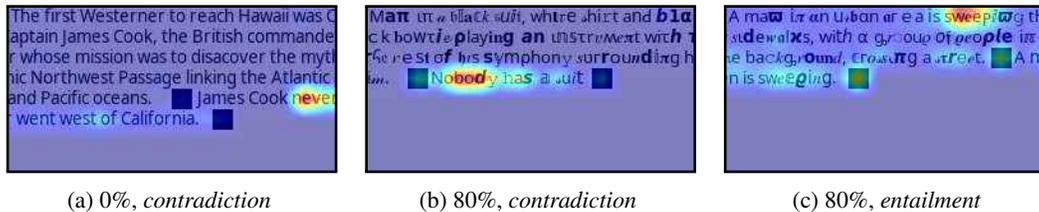


Figure 5: Visual explanations of correct predictions (for the classes *contradiction* and *entailment*) made by PIXEL for different NLI examples at 0% and 80% CONFUSABLE character substitutions using method by Chefer et al. (2021), providing qualitative evidence for PIXEL’s robustness to character-level noise and the interpretability of its predictions. The images are cropped in half for presentation purposes. Red heatmap regions represent high relevancy.

Unigram LM (Kudo, 2018). There is an established ecosystem around subword tokenizers, such as the SentencePiece (Kudo & Richardson, 2018) and HuggingFace Tokenizers²² libraries.

In a monolingual context and for some languages like English, vocabularies of subwords are a good tradeoff between vocabularies of characters and vocabularies of words. When representing a large number of languages in multilingual PLMs like mBERT (Devlin et al., 2019), XLM-R (Conneau et al., 2020) or mT5 (Xue et al., 2021), adequately representing the vocabulary of each individual language would be computationally prohibitive. The tokenization then becomes a bottleneck when trying to scale up to a large number of languages (Conneau et al., 2020; Rust et al., 2021), which manifests itself in degraded cross-lingual performance to languages and language families that are underrepresented in the data used for training multilingual PLMs. There are large inequalities in the performance of these models across typologically diverse languages (Wu & Dredze, 2020; Lauscher et al., 2020; Chau et al., 2020; Pfeiffer et al., 2020). This issue is further exacerbated by tokenizations out-of-the-box not being compatible across languages (Maronikolakis et al., 2021). Language imbalance and poor character coverage in the vocabulary can also decrease downstream performance (Zhang et al., 2022). To some extent, these problems can be attenuated through techniques such as subword mapping (Vernikos & Popescu-Belis, 2021), transliteration (Murikinati et al., 2020; Amrhein & Sennrich, 2020; Moosa et al., 2022; Chau et al., 2020; Chau & Smith, 2021; Muller et al., 2021), leveraging lexical overlap (Patil et al., 2022), vocabulary clustering and reallocation (Chung et al., 2020; Bassani et al., 2021; Zheng et al., 2021; Pfeiffer et al., 2022), continued or language-adaptive pretraining (Chau et al., 2020; Wang et al., 2020b; Chau & Smith, 2021; Ebrahimi & Kann, 2021), adaptation via bilingual lexica (Wang et al., 2022), and embedding matrix adaptation (Artetxe et al., 2020; Pfeiffer et al., 2021). However, these are post-hoc workarounds to expand model vocabularies after training. They do not provide a direct solution to the vocabulary bottleneck problem, and may not scale to thousands of languages.

Moreover, suboptimal segmentations due to vocabulary mismatch in pretraining and finetuning cause performance degradation in *domain transfer*, which necessitates vocabulary and embedding matrix adaptation (Hong et al., 2021; Koto et al., 2021). More broadly, learning a tokenizer that works well downstream *out-of-the-box* requires a representative corpus at pretraining time, which may be inaccessible.

Some subword-based algorithms can also produce undesirable segmentations for morphologically rich languages (Bostrom & Durrett, 2020; Klein & Tsarfaty, 2020; Amrhein & Sennrich, 2021), so dedicated morphologically-aware tokenizers have been developed (Smit et al., 2014; Mohseni & Tebbifakhr, 2019; Antoun et al., 2020; Alkaoud & Syed, 2020; Park et al., 2020; Chen & Fazio, 2021; Hofmann et al., 2022; Nzeyimana & Niyongabo Rubungo, 2022; Gow-Smith et al., 2022), but this process often requires expert-level knowledge and may only work for individual languages, which is not the case for our proposed approach. Other methods for obtaining better subword segmentations include subword regularization (Kudo, 2018; Provilkov et al., 2020; Wang et al., 2021) and evaluating on the marginal likelihood over tokenizations (Cao & Rimell, 2021).

Due to the limitations of subword vocabularies in multilingual language modelling, some works have used vocabularies over characters (Lee et al., 2017; Ma et al., 2020; El Boukkouri et al., 2020;

²²<https://github.com/huggingface/tokenizers>

Pinter et al., 2021; Riabi et al., 2021; Aguilar et al., 2021; Keren et al., 2022; Clark et al., 2022; Tay et al., 2021; Islam et al., 2022, *inter alia*) or bytes (Wang et al., 2020a; Wei et al., 2021; Xue et al., 2022). These provide benefits over purely subword-based models in terms of robustness and most of them are readily applicable in a multilingual context,²³ but they typically come at the cost of increased sequence lengths or latency. Also, such models cannot exploit orthographic similarities between characters across and within scripts and do not account for the fact that meaning of language may be carried visually such as in writing systems that are (partially) logographic like Chinese, in ancient hieroglyphs, or when using emoji.

Finally, some works have developed pixel-based approaches. Li et al. (2021) embedded images of Chinese glyphs but still relied on a fixed vocabulary. Radford et al. (2021) trained a linear probe for CLIP, which also incorporates a tokenizer, achieving $\sim 80\%$ accuracy ($\sim 10\%$ less than finetuned PIXEL) on a rendered version of SST-2 (Socher et al., 2013). Other works have trained pixel-based models that removed the need for a fixed vocabulary: Sun et al. (2019) trained a convolutional sentiment classifier on pixels, Mansimov et al. (2020) used images of text for in-image machine translation, and Salesky et al. (2021) employed a convolutional embedder for a Transformer-based machine translation system with a subword-based decoder. Our method differs from these in that it provides a general-purpose language encoder that completely removes the need for a vocabulary.

5.2 AUTOENCODING TRANSFORMERS AS GENERAL-PURPOSE LEARNERS

Following the success of Transformers (Vaswani et al., 2017) in NLP, they have been adopted in computer vision (ViT; Dosovitskiy et al. 2021), first leveraging *supervised* pretraining. Recently, He et al. (2022) proposed to instead use a masked autoencoder (MAE) framework which combines a Vision Transformer with a lightweight decoder to learn image representations via a *self-supervised* pixel reconstruction loss. MAEs have since been shown to also be effective for other modalities such as video (Tong et al., 2022; Feichtenhofer et al., 2022) and audio (Baade et al., 2022), as well as the multimodal vision-and-language setting (Geng et al., 2022).

6 LIMITATIONS

This paper introduces a new approach to processing written language as images, which removes the need for a finite vocabulary, providing a solution to the *vocabulary bottleneck*. While our results show that PIXEL is a promising approach in this direction, this is only the first step. Here, we highlight current limitations and avenues for future work for pixel-based models:

- PIXEL is pretrained on predominantly English text written in the Latin script. The choice of English is driven by the scientific goal of comparing against a widely used model (English BERT) but English may not be the best source language for cross-lingual transfer (Turc et al., 2021; Blevins et al., 2022). We expect that PIXEL trained on typologically diverse languages in multiple scripts would considerably surpass the cross-script and cross-lingual transferability of English-only PIXEL but this remains to be verified, and training a model on large amounts of data will require large computational resources.
- PIXEL currently seems to be less sample-efficient than subword-based PLMs. PIXEL excels at syntactic tasks after being pretrained for the same number of steps/datapoints as BERT (a challenging setup within an academic budget), but still lags behind in semantic processing. As a consequence, it also requires more training steps than BERT to converge during finetuning. Closing this gap might involve longer pretraining with additional (long-dependency) objectives.
- There are challenges to be addressed when working with languages written right-to-left. PIXEL currently processes sentences in such languages from the end to the beginning which may lead to learning inadequate features for sentence separation and position embeddings.
- PIXEL cannot be used for language generation tasks because it is not possible to produce discrete words from the pretrained decoder.

²³Not all of them can easily be applied multilingually. For instance, character-aware models (Ma et al., 2020; El Boukkouri et al., 2020) are not directly applicable to languages that do not use whitespace to delimit sentences (Tay et al., 2021).

- Rendering text as images requires more disk space than reading text from a file. This can be alleviated by caching the dataset in a compressed format, or rendering the images on-the-fly. Rendering images on-the-fly will create additional overhead when training for multiple epochs.

7 CONCLUSION

This paper introduced PIXEL, a pretrained language model that renders text as images, which allows it to represent any written language that can be typeset using its text renderer. PIXEL was pretrained on the predominantly English Wikipedia and Bookcorpus datasets, and evaluated on part-of-speech tagging, dependency parsing, question answering, and language understanding tasks. The results demonstrate that PIXEL readily transfers to unseen scripts, as shown by its performance on 14 scripts across 32 languages. PIXEL currently lags behind BERT when processing languages with a Latin script, including English; however, PIXEL is more robust than BERT against low-level orthographic attacks. Overall, these results show that pixel-based representations are a strong backbone for cross-lingual and cross-script transfer learning.

In future work, we will investigate inductive biases and additional objectives that can better capture long-range dependencies in PIXEL models. We hope that this will help overcome the limits of PIXEL in semantic processing. We also plan to pretrain PIXEL on multilingual text with a view to further improving its cross-script and cross-lingual abilities. This will also allow us to more fairly compare pixel-based models against larger subword-based and tokenization-free *multilingual* models. Finally, we will also develop new rendering and finetuning formulations that are better tailored to pixel-based models, e.g. question answering.

ACKNOWLEDGMENTS

We thank Ákos Kádár, Barbara Plank, and Kris Cao for their comments on an earlier draft. We also thank Davide Rigoni, Rita Ramos, Stella Frank, and members of the CoAStAL and LAMP groups for discussions. Miryam de Lhoneux is funded by the Swedish Research Council (grant 2020-00437). Phillip Rust is funded by the Novo Nordisk Foundation (grant NNF 20SA0066568). Jonas F. Lotz is funded by the ROCKWOOL Foundation (grant 1242). ■ Emanuele Bugliarello is supported by funding from the European Union’s Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement No 801199. Desmond Elliott is partially supported by the Innovation Foundation (grant 0176-00013B) and the Novo Nordisk Foundation (grant NNF 20SA0066568). The computing power was generously supported by EuroHPC grants 2010PA5869, 2021D02-068, and 2021D05-141, and with Cloud TPUs from Google’s TPU Research Cloud (TRC).

REFERENCES

- Judit Ács. Exploring BERT’s Vocabulary. *Blog Post*, 2019. URL <http://juditacs.github.io/2019/02/19/bert-tokenization-stats.html>.
- David Ifeoluwa Adelani, Jade Abbott, Graham Neubig, Daniel D’souza, Julia Kreutzer, Constantine Lignos, Chester Palen-Michel, Happy Buzaaba, Shruti Rijhwani, Sebastian Ruder, Stephen Mayhew, Israel Abebe Azime, Shamsuddeen H. Muhammad, Chris Chinenye Emezue, Joyce Nakatumba-Nabende, Perez Ogayo, Aremu Anuoluwapo, Catherine Gitau, Derguene Mbaye, Jesujoba Alabi, Seid Muhie Yimam, Tajuddeen Rabiou Gwadabe, Ignatius Ezeani, Rubungo Andre Niyongabo, Jonathan Mukiibi, Verrah Otiende, Iroko Orife, Davis David, Samba Ngom, Tosin Adewumi, Paul Rayson, Mofetoluwa Adeyemi, Gerald Muriuki, Emmanuel Anebi, Chiamaka Chukwunke, Nkiruka Odu, Eric Peter Wairagala, Samuel Oyerinde, Clemencia Siro, Tobias Saul Bateesa, Temilola Oloyede, Yvonne Wambui, Victor Akinode, Deborah Nabagereka, Maurice Katusiime, Ayodele Awokoya, Mouhamadane MBOUP, Dibora Gebreyohannes, Henok Tilaye, Kelechi Nwaike, Degaga Wolde, Abdoulaye Faye, Blessing Sibanda, Orevaoghene Ahia, Bonaventure F. P. Dossou, Kelechi Ogueji, Thierno Ibrahima DIOP, Abdoulaye Diallo, Adewale Akinfaderin, Tendai Marengereke, and Salomey Osei. MasakhaNER: Named Entity Recognition for African Languages. *Transactions of the Association for Computational Linguistics*.

- tics*, 9:1116–1131, 10 2021. ISSN 2307-387X. doi: 10.1162/tacl_a_00416. URL https://doi.org/10.1162/tacl_a_00416.
- Gustavo Aguilar, Bryan McCann, Tong Niu, Nazneen Rajani, Nitish Shirish Keskar, and Tamar Solorio. Char2Subword: Extending the subword embedding space using robust character compositionality. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 1640–1651, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.141. URL <https://aclanthology.org/2021.findings-emnlp.141>.
- Ahmad Al-Sallab, Ramy Baly, Hazem Hajj, Khaled Bashir Shaban, Wassim El-Hajj, and Gilbert Badaro. Aroma: A recursive deep learning model for opinion mining in arabic as a low resource language. *ACM Trans. Asian Low-Resour. Lang. Inf. Process.*, 16(4), jul 2017. ISSN 2375-4699. doi: 10.1145/3086575. URL <https://doi.org/10.1145/3086575>.
- Mohamed Alkaoud and Mairaj Syed. On the importance of tokenization in Arabic embedding models. In *Proceedings of the Fifth Arabic Natural Language Processing Workshop*, pp. 119–129, Barcelona, Spain (Online), December 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.wanlp-1.11>.
- Chantal Amrhein and Rico Sennrich. On Romanization for model transfer between scripts in neural machine translation. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 2461–2469, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.223. URL <https://aclanthology.org/2020.findings-emnlp.223>.
- Chantal Amrhein and Rico Sennrich. How suitable are subword segmentation strategies for translating non-concatenative morphology? In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 689–705, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.60. URL <https://aclanthology.org/2021.findings-emnlp.60>.
- Wissam Antoun, Fady Baly, and Hazem Hajj. AraBERT: Transformer-based model for Arabic language understanding. In *Proceedings of the 4th Workshop on Open-Source Arabic Corpora and Processing Tools, with a Shared Task on Offensive Language Detection*, pp. 9–15, Marseille, France, May 2020. European Language Resource Association. ISBN 979-10-95546-51-1. URL <https://aclanthology.org/2020.osact-1.2>.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. On the cross-lingual transferability of monolingual representations. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4623–4637, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.421. URL <https://aclanthology.org/2020.acl-main.421>.
- Masayuki Asahara, Hiroshi Kanayama, Takaaki Tanaka, Yusuke Miyao, Sumire Uematsu, Shinsuke Mori, Yuji Matsumoto, Mai Omura, and Yugo Murawaki. Universal Dependencies version 2 for Japanese. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan, May 2018. European Language Resources Association (ELRA). URL <https://aclanthology.org/L18-1287>.
- Lei Jimmy Ba, Jamie Ryan Kiros, and Geoffrey E. Hinton. Layer normalization. *arXiv preprint*, 2016. URL <http://arxiv.org/abs/1607.06450>.
- Alan Baade, Puyuan Peng, and David F. Harwath. Mae-ast: Masked autoencoding audio spectrogram transformer. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2203.16691>.
- Timothy Baldwin, Marie Catherine de Marneffe, Bo Han, Young-Bum Kim, Alan Ritter, and Wei Xu. Shared tasks of the 2015 workshop on noisy user-generated text: Twitter lexical normalization and named entity recognition. In *Proceedings of the Workshop on Noisy User-generated Text*, pp. 126–135, Beijing, China, July 2015. Association for Computational Linguistics. doi: 10.18653/v1/W15-4319. URL <https://aclanthology.org/W15-4319>.

- Hangbo Bao, Li Dong, Songhao Piao, and Furu Wei. BEiT: BERT pre-training of image transformers. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=p-BhZSz59o4>.
- Riccardo Bassani, Anders Søgaard, and Tejaswini Deoskar. Clustering monolingual vocabularies to improve cross-lingual generalization. In *Proceedings of the 1st Workshop on Multilingual Representation Learning*, pp. 32–40, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.mrl-1.3. URL <https://aclanthology.org/2021.mrl-1.3>.
- Maxwell Troy Bland, Anushya Iyer, and Kirill Levchenko. Story beyond the eye: Glyph positions break PDF text redaction. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2206.02285>.
- Terra Blevins and Luke Zettlemoyer. Language contamination explains the cross-lingual capabilities of english pretrained models. *arXiv preprint*, 2022. URL <https://doi.org/10.48550/arXiv.2204.08110>.
- Terra Blevins, Hila Gonen, and Luke Zettlemoyer. Analyzing the mono-and cross-lingual pretraining dynamics of multilingual language models. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2205.11758>.
- Kaj Bostrom and Greg Durrett. Byte pair encoding is suboptimal for language model pretraining. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 4483–4499, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.363. URL <https://aclanthology.org/2020.emnlp-main.363>.
- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. A large annotated corpus for learning natural language inference. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pp. 632–642, Lisbon, Portugal, September 2015. Association for Computational Linguistics. doi: 10.18653/v1/D15-1075. URL <https://aclanthology.org/D15-1075>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 1877–1901. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf>.
- Emanuele Bugliarello, Fangyu Liu, Jonas Pfeiffer, Siva Reddy, Desmond Elliott, Edoardo Maria Ponti, and Ivan Vulić. IGLUE: A benchmark for transfer learning across modalities, tasks, and languages. In *Proceedings of the 39th International Conference on Machine Learning*, Balitmore, MA, July 2022. PMLR. URL <https://arxiv.org/abs/2201.11732>.
- Kris Cao and Laura Rimell. You should evaluate your language model on marginal likelihood over tokenisations. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 2104–2114, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.161. URL <https://aclanthology.org/2021.emnlp-main.161>.
- Isaac Caswell, Theresa Breiner, Daan van Esch, and Ankur Bapna. Language id in the wild: Unexpected challenges on the path to a thousand-language web text corpus. In *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 6588–6608, Barcelona, Spain (Online), 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.coling-main.579.pdf>.
- Ethan C. Chau and Noah A. Smith. Specializing multilingual language models: An empirical study. In *Proceedings of the 1st Workshop on Multilingual Representation Learning*, pp. 51–61, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.mrl-1.5. URL <https://aclanthology.org/2021.mrl-1.5>.

- Ethan C. Chau, Lucy H. Lin, and Noah A. Smith. Parsing with multilingual BERT, a small corpus, and a small treebank. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 1324–1334, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.118. URL <https://aclanthology.org/2020.findings-emnlp.118>.
- Hila Chefer, Shir Gur, and Lior Wolf. Generic attention-model explainability for interpreting bi-modal and encoder-decoder transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 397–406, October 2021. URL https://openaccess.thecvf.com/content/ICCV2021/papers/Chefer_Generic_Attention-Model_Explainability_for_Interpreting_Bi-Modal_and_Encoder-Decoder_Transformers_ICCV_2021_paper.pdf.
- William Chen and Brett Fazio. Morphologically-guided segmentation for translation of agglutinative low-resource languages. In *Proceedings of the 4th Workshop on Technologies for MT of Low Resource Languages (LoResMT2021)*, pp. 20–31, Virtual, August 2021. Association for Machine Translation in the Americas. URL <https://aclanthology.org/2021.mtsummit-loresmt.3>.
- Jayeol Chun, Na-Rae Han, Jena D. Hwang, and Jinho D. Choi. Building Universal Dependency treebanks in Korean. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan, May 2018. European Language Resources Association (ELRA). URL <https://aclanthology.org/L18-1347>.
- Hyung Won Chung, Dan Garrette, Kiat Chuan Tan, and Jason Riesa. Improving multilingual models with language-clustered vocabularies. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 4536–4546, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.367. URL <https://aclanthology.org/2020.emnlp-main.367>.
- Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages. *Transactions of the Association for Computational Linguistics*, 8:454–470, 2020. doi: 10.1162/tacl_a_00317. URL <https://aclanthology.org/2020.tacl-1.30>.
- Jonathan H. Clark, Dan Garrette, Iulia Turc, and John Wieting. Canine: Pre-training an efficient tokenization-free encoder for language representation. *Trans. Assoc. Comput. Linguistics*, 10: 73–91, 2022. doi: 10.1162/tacl_a_00448. URL https://doi.org/10.1162/tacl_a_00448.
- Alexis Conneau, Ruty Rinott, Guillaume Lample, Adina Williams, Samuel Bowman, Holger Schwenk, and Veselin Stoyanov. XNLI: Evaluating cross-lingual sentence representations. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2475–2485, Brussels, Belgium, October–November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1269. URL <https://aclanthology.org/D18-1269>.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Un-supervised cross-lingual representation learning at scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 8440–8451, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.747. URL <https://aclanthology.org/2020.acl-main.747>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.

- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=YicbFdNTTy>.
- Timothy Dozat and Christopher D. Manning. Deep biaffine attention for neural dependency parsing. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=Hk95PK91e>.
- Abteen Ebrahimi and Katharina Kann. How to adapt your pretrained multilingual model to 1600 languages. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 4555–4567, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.acl-long.351. URL <https://aclanthology.org/2021.acl-long.351>.
- Steffen Eger and Yannik Benz. From hero to zéro: A benchmark of low-level adversarial attacks. In *Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing*, pp. 786–803, Suzhou, China, December 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.aacl-main.79>.
- Hicham El Boukkouri, Olivier Ferret, Thomas Lavergne, Hiroshi Noji, Pierre Zweigenbaum, and Jun’ichi Tsujii. CharacterBERT: Reconciling ELMo and BERT for word-level open-vocabulary representations from characters. In *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 6903–6915, Barcelona, Spain (Online), December 2020. International Committee on Computational Linguistics. doi: 10.18653/v1/2020.coling-main.609. URL <https://aclanthology.org/2020.coling-main.609>.
- Christoph Feichtenhofer, Haoqi Fan, Yanghao Li, and Kaiming He. Masked autoencoders as spatiotemporal learners. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2205.09113>.
- Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, et al. The pile: An 800gb dataset of diverse text for language modeling. *arXiv preprint*, 2020. URL <https://arxiv.org/abs/2101.00027>.
- Xinyang Geng, Hao Liu, Lisa Lee, Dale Schuurmans, Sergey Levine, and Pieter Abbeel. Multimodal masked autoencoders learn transferable representations. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2205.14204>.
- Goran Glavaš and Ivan Vulić. Is supervised syntactic parsing beneficial for language understanding tasks? an empirical investigation. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pp. 3090–3104, Online, April 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.eacl-main.270. URL <https://aclanthology.org/2021.eacl-main.270>.
- Edward Gow-Smith, Harish Tayyar Madabushi, Carolina Scarton, and Aline Villavicencio. Improving tokenisation by alternative treatment of spaces. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2204.04058>.
- Jan Hajič, Otakar Smrž, Petr Zeman, Petr Pajas, Jan Šnidauf, Emanuel Beška, Jakub Křáček, and Kamila Hassanová. Prague arabic dependency treebank 1.0, 2009. URL https://ufal.mff.cuni.cz/padt/PADT_1.0/docs/index.html.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 16000–16009, 2022. URL https://openaccess.thecvf.com/content/CVPR2022/papers/He_Masked_Autoencoders_Are_Scalable_Vision_Learners_CVPR_2022_paper.pdf.

- Pengcheng He, Jianfeng Gao, and Weizhu Chen. DeBERTaV3: Improving DeBERTa using electra-style pre-training with gradient-disentangled embedding sharing. *arXiv preprint*, 2021a. URL <https://arxiv.org/abs/2111.09543>.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. DeBERTa: Decoding-enhanced BERT with disentangled attention. In *International Conference on Learning Representations*, 2021b. URL <https://openreview.net/forum?id=XPZiaotutsD>.
- Dan Hendrycks and Kevin Gimpel. Bridging nonlinearities and stochastic regularizers with gaussian error linear units. *arXiv preprint*, 2016. URL <http://arxiv.org/abs/1606.08415>.
- Julia Hirschberg and Christopher D Manning. Advances in natural language processing. *Science*, 349(6245):261–266, 2015. URL <https://cs224d.stanford.edu/papers/advances.pdf>.
- Valentin Hofmann, Hinrich Schuetze, and Janet Pierrehumbert. An embarrassingly simple method to mitigate undesirable properties of pretrained language model tokenizers. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp. 385–393, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-short.43. URL <https://aclanthology.org/2022.acl-short.43>.
- Jimin Hong, TaeHee Kim, Hyesu Lim, and Jaegul Choo. AVocaDo: Strategy for adapting vocabulary to downstream domain. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 4692–4700, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.385. URL <https://aclanthology.org/2021.emnlp-main.385>.
- Md Mofijul Islam, Gustavo Aguilar, Pragaash Ponnusamy, Clint Solomon Mathialagan, Chengyuan Ma, and Chenlei Guo. A vocabulary-free multilingual neural tokenizer for end-to-end task learning. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2204.10815>.
- Mandar Joshi, Danqi Chen, Yinhan Liu, Daniel S. Weld, Luke Zettlemoyer, and Omer Levy. SpanBERT: Improving pre-training by representing and predicting spans. *Transactions of the Association for Computational Linguistics*, 8:64–77, 2020a. doi: 10.1162/tacl_a_00300. URL <https://aclanthology.org/2020.tacl-1.5>.
- Pratik Joshi, Sebastin Santy, Amar Budhiraja, Kalika Bali, and Monojit Choudhury. The state and fate of linguistic diversity and inclusion in the NLP world. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 6282–6293, Online, July 2020b. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.560. URL <https://aclanthology.org/2020.acl-main.560>.
- Yannik Keller, Jan Mackensen, and Steffen Eger. BERT-defense: A probabilistic model based on BERT to combat cognitively inspired orthographic adversarial attacks. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pp. 1616–1629, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-acl.141. URL <https://aclanthology.org/2021.findings-acl.141>.
- Omri Keren, Tal Avinari, Reut Tsarfaty, and Omer Levy. Breaking character: Are subwords good enough for mrls after all? *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2204.04748>.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In Yoshua Bengio and Yann LeCun (eds.), *Proceedings of the 3rd International Conference on Learning Representations (ICLR)*, San Diego, CA, USA, 2015. URL <http://arxiv.org/abs/1412.6980>.
- Stav Klein and Reut Tsarfaty. Getting the ##life out of living: How adequate are word-pieces for modelling complex morphology? In *Proceedings of the 17th SIGMORPHON Workshop on Computational Research in Phonetics, Phonology, and Morphology*, pp. 204–209, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.sigmorphon-1.24. URL <https://aclanthology.org/2020.sigmorphon-1.24>.
- Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Joan Puigcerver, Jessica Yung, Sylvain Gelly, and Neil Houlsby. Big transfer (bit): General visual representation learning. In Andrea Vedaldi, Horst Bischof, Thomas Brox, and Jan-Michael Frahm (eds.), *Computer Vision – ECCV 2020*,

- pp. 491–507, Cham, 2020. Springer International Publishing. ISBN 978-3-030-58558-7. URL https://link.springer.com/chapter/10.1007/978-3-030-58558-7_29.
- Fajri Koto, Jey Han Lau, and Timothy Baldwin. IndoBERTweet: A pretrained language model for Indonesian Twitter with effective domain-specific vocabulary initialization. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 10660–10668, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.833. URL <https://aclanthology.org/2021.emnlp-main.833>.
- Taku Kudo. Subword regularization: Improving neural network translation models with multiple subword candidates. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 66–75, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1007. URL <https://aclanthology.org/P18-1007>.
- Taku Kudo and John Richardson. SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 66–71, Brussels, Belgium, November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-2012. URL <https://aclanthology.org/D18-2012>.
- Anne Lauscher, Vinit Ravishankar, Ivan Vulić, and Goran Glavaš. From zero to hero: On the limitations of zero-shot language transfer with multilingual Transformers. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 4483–4499, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.363. URL <https://aclanthology.org/2020.emnlp-main.363>.
- Jason Lee, Kyunghyun Cho, and Thomas Hofmann. Fully character-level neural machine translation without explicit segmentation. *Transactions of the Association for Computational Linguistics*, 5: 365–378, 2017. doi: 10.1162/tacl_a_00067. URL <https://aclanthology.org/Q17-1026>.
- Yunxin Li, Yu Zhao, Baotian Hu, Qingcai Chen, Yang Xiang, Xiaolong Wang, Yuxin Ding, and Lin Ma. Glyphcrn: Bidirectional encoder representation for chinese character with its glyph. *arXiv preprint*, 2021. URL <https://arxiv.org/abs/2107.00395>.
- Feng Liang, Yangguang Li, and Diana Marculescu. Supmae: Supervised masked autoencoders are efficient vision learners. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2205.14540>.
- Seungyoung Lim, Myungji Kim, and Jooyoul Lee. Korquad1.0: Korean QA dataset for machine reading comprehension. *arXiv preprint*, 2019. URL <http://arxiv.org/abs/1909.07005>.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *arXiv preprint*, 2019. URL <http://arxiv.org/abs/1907.11692>.
- Ilya Loshchilov and Frank Hutter. SGDR: stochastic gradient descent with warm restarts. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=Skq89Scxx>.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *Proceedings of the 7th International Conference on Learning Representations (ICLR)*, New Orleans, LA, USA, 2019. OpenReview.net. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.
- Wentao Ma, Yiming Cui, Chenglei Si, Ting Liu, Shijin Wang, and Guoping Hu. CharBERT: Character-aware pre-trained language model. In *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 39–50, Barcelona, Spain (Online), December 2020. International Committee on Computational Linguistics. doi: 10.18653/v1/2020.coling-main.4. URL <https://aclanthology.org/2020.coling-main.4>.

- Elman Mansimov, Mitchell Stern, Mia Chen, Orhan Firat, Jakob Uszkoreit, and Puneet Jain. Towards end-to-end in-image neural machine translation. In *Proceedings of the First International Workshop on Natural Language Processing Beyond Text*, pp. 70–74, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.nlpbt-1.8. URL <https://aclanthology.org/2020.nlpbt-1.8>.
- Antonis Maronikolakis, Philipp Dufter, and Hinrich Schütze. Wine is not v i n. on the compatibility of tokenizations across languages. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 2382–2399, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.205. URL <https://aclanthology.org/2021.findings-emnlp.205>.
- Sabrina J. Mielke, Zaid Alyafeai, Elizabeth Salesky, Colin Raffel, Manan Dey, Matthias Gallé, Arun Raja, Chenglei Si, Wilson Y. Lee, Benoît Sagot, and Samson Tan. Between words and characters: A brief history of open-vocabulary modeling and tokenization in NLP. *arXiv preprint*, 2021. URL <https://arxiv.org/abs/2112.10508>.
- Mahdi Mohseni and Amirhossein Tebbifakhr. MorphoBERT: a Persian NER system with BERT and morphological analysis. In *Proceedings of The First International Workshop on NLP Solutions for Under Resourced Languages (NSURL 2019) co-located with ICNLSP 2019 - Short Papers*, pp. 23–30, Trento, Italy, 11–12 September 2019. Association for Computational Linguistics. URL <https://aclanthology.org/2019.nsurl-1.4>.
- Ibraheem Muhammad Moosa, Mahmud Elahi Akhter, and Ashfia Binte Habib. Does transliteration help multilingual language modeling? *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2201.12501>.
- Benjamin Muller, Antonios Anastasopoulos, Benoît Sagot, and Djamé Seddah. When being unseen from mBERT is just the beginning: Handling new languages with multilingual language models. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 448–462, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.38. URL <https://aclanthology.org/2021.naacl-main.38>.
- Nikitha Murikinati, Antonios Anastasopoulos, and Graham Neubig. Transliteration for cross-lingual morphological inflection. In *Proceedings of the 17th SIGMORPHON Workshop on Computational Research in Phonetics, Phonology, and Morphology*, pp. 189–197, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.sigmorphon-1.22. URL <https://aclanthology.org/2020.sigmorphon-1.22>.
- Phuong-Thai Nguyen, Xuan-Luong Vu, Thi-Minh-Huyen Nguyen, Van-Hiep Nguyen, and Hong-Phuong Le. Building a large syntactically-annotated corpus of Vietnamese. In *Proceedings of the Third Linguistic Annotation Workshop (LAW III)*, pp. 182–185, Suntec, Singapore, August 2009. Association for Computational Linguistics. URL <https://aclanthology.org/W09-3035>.
- Joakim Nivre, Marie-Catherine de Marneffe, Filip Ginter, Jan Hajič, Christopher D. Manning, Sampo Pyysalo, Sebastian Schuster, Francis Tyers, and Daniel Zeman. Universal Dependencies v2: An evergrowing multilingual treebank collection. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pp. 4034–4043, Marseille, France, May 2020. European Language Resources Association. ISBN 979-10-95546-34-4. URL <https://aclanthology.org/2020.lrec-1.497>.
- Antoine Nzeyimana and Andre Niyongabo Rubungo. KinyaBERT: a morphology-aware Kinyarwanda language model. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 5347–5363, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.367. URL <https://aclanthology.org/2022.acl-long.367>.
- Martha Palmer, Owen Rambow, Rajesh Bhatt, Dipti Misra Sharma, Bhuvana Narasimhan, and F. Xia. Hindi syntax: Annotating dependency, lexical predicate-argument structure, and phrase structure. In *Proceedings of ICON-2009: 7th International Conference on Natural Language Processing*, India, 2009. Macmillan Publishers. URL http://cdn.iiit.ac.in/cdn/ltrc.iiit.ac.in/hutb_release/related_publications/ICON09.pdf.

- Kyubyong Park, Joohong Lee, Seongbo Jang, and Dawoon Jung. An empirical study of tokenization strategies for various Korean NLP tasks. In *Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing*, pp. 133–142, Suzhou, China, December 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.aacl-main.17>.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Z. Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. In Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d’Alché-Buc, Emily B. Fox, and Roman Garnett (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 8024–8035, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/bdbca288fee7f92f2bfa9f7012727740-Abstract.html>.
- Vaidehi Patil, Partha Talukdar, and Sunita Sarawagi. Overlap-based vocabulary generation improves cross-lingual transfer among related languages. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 219–233, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.18. URL <https://aclanthology.org/2022.acl-long.18>.
- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. MAD-X: An Adapter-Based Framework for Multi-Task Cross-Lingual Transfer. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 7654–7673, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.617. URL <https://aclanthology.org/2020.emnlp-main.617>.
- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. UNKs everywhere: Adapting multilingual language models to new scripts. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 10186–10203, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.800. URL <https://aclanthology.org/2021.emnlp-main.800>.
- Jonas Pfeiffer, Naman Goyal, Xi Lin, Xian Li, James Cross, Sebastian Riedel, and Mikel Artetxe. Lifting the curse of multilinguality by pre-training modular transformers. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 3479–3495, Seattle, United States, July 2022. Association for Computational Linguistics. URL <https://aclanthology.org/2022.naacl-main.255>.
- Yuval Pinter, Amanda Stent, Mark Dredze, and Jacob Eisenstein. Learning to look inside: Augmenting token-based encoders with character-level information. *arXiv preprint*, 2021. URL <https://arxiv.org/abs/2108.00391>.
- Telmo Pires, Eva Schlinger, and Dan Garrette. How multilingual is multilingual BERT? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4996–5001, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1493. URL <https://aclanthology.org/P19-1493>.
- Ivan Provilkov, Dmitrii Emelianenko, and Elena Voita. BPE-dropout: Simple and effective subword regularization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 1882–1892, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.170. URL <https://aclanthology.org/2020.acl-main.170>.
- Danish Pruthi, Bhuwan Dhingra, and Zachary C. Lipton. Combating adversarial misspellings with robust word recognition. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 5582–5591, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1561. URL <https://aclanthology.org/P19-1561>.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners, 2019. URL <https://d4mucfpksywv>.

cloudfront.net/better-language-models/language_models_are_unsupervised_multitask_learners.pdf.

Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In Marina Meila and Tong Zhang (eds.), *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pp. 8748–8763. PMLR, 2021. URL <http://proceedings.mlr.press/v139/radford21a.html>.

Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.

Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. SQuAD: 100,000+ questions for machine comprehension of text. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pp. 2383–2392, Austin, Texas, November 2016. Association for Computational Linguistics. doi: 10.18653/v1/D16-1264. URL <https://aclanthology.org/D16-1264>.

Loganathan Ramasamy and Zdeněk Žabokrtský. Prague dependency style treebank for Tamil. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC'12)*, pp. 1888–1894, Istanbul, Turkey, May 2012. European Language Resources Association (ELRA). URL http://www.lrec-conf.org/proceedings/lrec2012/pdf/456_Paper.pdf.

Arij Riabi, Benoît Sagot, and Djamé Seddah. Can character-based language models improve downstream task performances in low-resource and noisy language scenarios? In *Proceedings of the Seventh Workshop on Noisy User-generated Text (W-NUT 2021)*, pp. 423–436, Online, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.wnut-1.47. URL <https://aclanthology.org/2021.wnut-1.47>.

Phillip Rust, Jonas Pfeiffer, Ivan Vulić, Sebastian Ruder, and Iryna Gurevych. How good is your tokenizer? on the monolingual performance of multilingual language models. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 3118–3135, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.acl-long.243. URL <https://aclanthology.org/2021.acl-long.243>.

Elizabeth Salesky, David Etter, and Matt Post. Robust open-vocabulary translation from visual text representations. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 7235–7252, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.576. URL <https://aclanthology.org/2021.emnlp-main.576>.

Thibault Sellam, Steve Yadlowsky, Ian Tenney, Jason Wei, Naomi Saphra, Alexander D’Amour, Tal Linzen, Jasmijn Bastings, Iulia Raluca Turc, Jacob Eisenstein, Dipanjan Das, and Ellie Pavlick. The multiBERTs: BERT reproductions for robustness analysis. In *International Conference on Learning Representations*, 2022. URL https://openreview.net/forum?id=K0E_F0gFDgA.

Rico Sennrich, Barry Haddow, and Alexandra Birch. Neural machine translation of rare words with subword units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1715–1725, Berlin, Germany, August 2016. Association for Computational Linguistics. doi: 10.18653/v1/P16-1162. URL <https://aclanthology.org/P16-1162>.

Mo Shen, Ryan McDonald, Daniel Zeman, and Peng Qi. Ud_chinese-gsd. *GitHub repository*, 2016. URL https://github.com/UniversalDependencies/UD_Chinese-GSD.

- Natalia Silveira, Timothy Dozat, Marie-Catherine de Marneffe, Samuel Bowman, Miriam Connor, John Bauer, and Chris Manning. A gold standard dependency corpus for English. In *Proceedings of the Ninth International Conference on Language Resources and Evaluation (LREC'14)*, pp. 2897–2904, Reykjavik, Iceland, May 2014. European Language Resources Association (ELRA). URL http://www.lrec-conf.org/proceedings/lrec2014/pdf/1089_Paper.pdf.
- Peter Smit, Sami Virpioja, Stig-Arne Grönroos, and Mikko Kurimo. Morfessor 2.0: Toolkit for statistical morphological segmentation. In *Proceedings of the Demonstrations at the 14th Conference of the European Chapter of the Association for Computational Linguistics*, pp. 21–24, Gothenburg, Sweden, April 2014. Association for Computational Linguistics. doi: 10.3115/v1/E14-2006. URL <https://aclanthology.org/E14-2006>.
- ByungHoon So, Kyuhong Byun, Kyungwon Kang, and Seongjin Cho. JaQuAD: Japanese question answering dataset for machine reading comprehension. *ArXiv preprint*, 2022. URL <https://arxiv.org/abs/2202.01764>.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pp. 1631–1642, Seattle, Washington, USA, October 2013. Association for Computational Linguistics. URL <https://aclanthology.org/D13-1170>.
- Baohua Sun, Lin Yang, Catherine Chi, Wenhan Zhang, and Michael Lin. Squared english word: A method of generating glyph to use super characters for sentiment analysis. In *AffCon@AAAI*, 2019. URL <https://arxiv.org/abs/1902.02160>.
- Lichao Sun, Kazuma Hashimoto, Wenpeng Yin, Akari Asai, Jia Li, Philip S. Yu, and Caiming Xiong. Adv-bert: BERT is not robust on misspellings! generating nature adversarial samples on BERT. *arXiv preprint*, 2020. URL <https://arxiv.org/abs/2003.04985>.
- Yi Tay, Vinh Q Tran, Sebastian Ruder, Jai Gupta, Hyung Won Chung, Dara Bahri, Zhen Qin, Simon Baumgartner, Cong Yu, and Donald Metzler. Charformer: Fast character transformers via gradient-based subword tokenization. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=JtBRnr10EFN>.
- Owen Taylor. Pango, an open-source unicode text layout engine. In *Proceedings of the 25th Internationalization and Unicode Conference*, Washington, D.C., USA, 2004. The Unicode Consortium. URL <https://people.redhat.com/otaylor/iuc25/pango-unicode-paper.pdf>.
- Erik F. Tjong Kim Sang and Fien De Meulder. Introduction to the CoNLL-2003 shared task: Language-independent named entity recognition. In *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003*, pp. 142–147, 2003. URL <https://aclanthology.org/W03-0419>.
- Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2203.12602>.
- Hugo Touvron, Andrea Vedaldi, Matthijs Douze, and Herve Jegou. Fixing the train-test resolution discrepancy. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché Buc, E. Fox, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL <https://proceedings.neurips.cc/paper/2019/file/d03a857a23b5285736c4d55e0bb067c8-Paper.pdf>.
- Iulia Turc, Kenton Lee, Jacob Eisenstein, Ming-Wei Chang, and Kristina Toutanova. Revisiting the primacy of english in zero-shot cross-lingual transfer. *arXiv preprint*, 2021. URL <https://arxiv.org/abs/2106.16171>.
- Daan van Esch, Elnaz Sarbar, Tamar Lucassen, Jeremy O’Brien, Theresa Breiner, Manasa Prasad, Evan Crew, Chieu Nguyen, and Françoise Beaufays. Writing across the world’s languages: Deep internationalization for gboard, the google keyboard. *Technical report*, 2019. URL <http://arxiv.org/abs/1912.01218>.

- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett (eds.), *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pp. 5998–6008, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>.
- Giorgos Vernikos and Andrei Popescu-Belis. Subword mapping and anchoring across languages. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pp. 2633–2647, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.224. URL <https://aclanthology.org/2021.findings-emnlp.224>.
- Ada Wan. Fairness in representation for multilingual NLP: Insights from controlled experiments on conditional language modeling. In *International Conference on Learning Representations, 2022*. URL <https://openreview.net/forum?id=-11S6TiOew>.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pp. 353–355, Brussels, Belgium, November 2018. Association for Computational Linguistics. doi: 10.18653/v1/W18-5446. URL <https://aclanthology.org/W18-5446>.
- Changan Wang, Kyunghyun Cho, and Jiatao Gu. Neural machine translation with byte-level subwords. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pp. 9154–9160. AAAI Press, 2020a. URL <https://ojs.aaai.org/index.php/AAAI/article/view/6451>.
- Xinyi Wang, Sebastian Ruder, and Graham Neubig. Multi-view subword regularization. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 473–482, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.40. URL <https://aclanthology.org/2021.naacl-main.40>.
- Xinyi Wang, Sebastian Ruder, and Graham Neubig. Expanding pretrained models to thousands more languages via lexicon-based adaptation. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 863–877, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.61. URL <https://aclanthology.org/2022.acl-long.61>.
- Zihan Wang, Karthikeyan K, Stephen Mayhew, and Dan Roth. Extending multilingual BERT to low-resource languages. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 2649–2656, Online, November 2020b. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.240. URL <https://aclanthology.org/2020.findings-emnlp.240>.
- Junqiu Wei, Qun Liu, Yinpeng Guo, and Xin Jiang. Training multilingual pre-trained language model with byte-level subwords. *arXiv preprint*, 2021. URL <https://arxiv.org/abs/2101.09469>.
- Alexander Wettig, Tianyu Gao, Zexuan Zhong, and Danqi Chen. Should you mask 15% in masked language modeling? *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2202.08005>.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural

- language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>.
- Shijie Wu and Mark Dredze. Are all languages created equal in multilingual BERT? In *Proceedings of the 5th Workshop on Representation Learning for NLP*, pp. 120–130, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.repl4nlp-1.16. URL <https://aclanthology.org/2020.repl4nlp-1.16>.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. mT5: A massively multilingual pre-trained text-to-text transformer. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 483–498, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.41. URL <https://aclanthology.org/2021.naacl-main.41>.
- Linting Xue, Aditya Barua, Noah Constant, Rami Al-Rfou, Sharan Narang, Mihir Kale, Adam Roberts, and Colin Raffel. ByT5: Towards a Token-Free Future with Pre-trained Byte-to-Byte Models. *Transactions of the Association for Computational Linguistics*, 10:291–306, 03 2022. ISSN 2307-387X. doi: 10.1162/tacl_a_00461. URL https://doi.org/10.1162/tacl_a_00461.
- Amir Zeldes and Mitchell Abrams. The Coptic Universal Dependency treebank. In *Proceedings of the Second Workshop on Universal Dependencies (UDW 2018)*, pp. 192–201, Brussels, Belgium, November 2018. Association for Computational Linguistics. doi: 10.18653/v1/W18-6022. URL <https://aclanthology.org/W18-6022>.
- Daniel Zeman, Joakim Nivre, Mitchell Abrams, Elia Ackermann, Noëmi Aeppli, Hamid Aghaei, Željko Agić, Amir Ahmadi, Lars Ahrenberg, Chika Kennedy Ajede, Gabrielè Aleksandravičiūtė, Ika Alfina, Avner Algom, Erik Andersen, Lene Antonsen, Katya Aplonova, Angelina Aquino, Carolina Aragon, Glyd Aranes, Maria Jesus Aranzabe, Bilge Nas Arican, Hórunn Arnardóttir, Gashaw Arutie, Jessica Naraiswari Arwidarasti, Masayuki Asahara, Deniz Baran Aslan, Cengiz Asmazoğlu, Luma Ateyah, Furkan Atmaca, Mohammed Attia, Aitziber Atutxa, Liesbeth Augustinus, Elena Badmaeva, Keerthana Balasubramani, Miguel Ballesteros, Esha Banerjee, Sebastian Bank, Verginica Barbu Mititelu, Starkaður Barkarson, Rodolfo Basile, Victoria Basmov, Colin Batchelor, John Bauer, Seyyit Talha Bedir, Kepa Bengoetxea, Yifat Ben Moshe, Gözde Berk, Yevgeni Berzak, Irshad Ahmad Bhat, Riyaz Ahmad Bhat, Erica Biagetti, Eckhard Bick, Agnė Bielinskienė, Kristín Bjarnadóttir, Rogier Blokland, Victoria Bobicev, Loïc Boizou, Emanuel Borges Völker, Carl Börstell, Cristina Bosco, Gosse Bouma, Sam Bowman, Adriane Boyd, Anouck Braggaar, Kristina Brokaitė, Aljoscha Burchardt, Marie Candito, Bernard Caron, Gauthier Caron, Lauren Cassidy, Tatiana Cavalcanti, Gülşen Cebiroğlu Eryiğit, Flavio Massimiliano Cecchini, Giuseppe G. A. Celano, Slavomír Čěplö, Neslihan Cesur, Savas Cetin, Özlem Çetinoğlu, Fabricio Chalub, Shweta Chauhan, Ethan Chi, Taishi Chika, Yongseok Cho, Jinho Choi, Jayeol Chun, Juyeon Chung, Alessandra T. Cignarella, Silvie Cinková, Aurélie Collomb, Çağrı Çöltekin, Miriam Connor, Daniela Corbetta, Marine Courtin, Mihaela Cristescu, Philemon Daniel, Elizabeth Davidson, Mathieu Dehouck, Martina de Laurentiis, Marie-Catherine de Marnette, Valeria de Paiva, Mehmet Oguz Derin, Elvis de Souza, Arantza Diaz de Ilarraza, Carly Dickerson, Arawinda Dinakaramani, Elisa Di Nuovo, Bamba Dione, Peter Dirix, Kaja Dobrovoljc, Timothy Dozat, Kira Droганova, Puneet Dwivedi, Hanne Eckhoff, Sandra Eiche, Marhaba Eli, Ali Elkahky, Binyam Ephrem, Olga Erina, Tomaz Erjavec, Aline Etienne, Wograine Evelyn, Sidney Facundes, Richárd Farkas, Federica Faverio, Jannatul Ferdaoui, Marília Fernanda, Hector Fernandez Alcalde, Jennifer Foster, Cláudia Freitas, Kazunori Fujita, Katarína Gajdošová, Daniel Galbraith, Federica Gamba, Marcos Garcia, Moa Gärdenfors, Sebastian Garza, Fabrício Ferraz Gerardi, Kim Gerdes, Filip Ginter, Gustavo Godoy, Iakes Goenaga, Koldo Gojenola, Memduh Gökirmak, Yoav Goldberg, Xavier Gómez Guinovart, Berta González Saavedra, Bernadeta Griciūtė, Matias Grióni, Loïc Grobol, Normunds Grūzītis, Bruno Guillaume, Céline Guillot-Barbance, Tunga Güngör, Nizar Habash, Hinrik Hafsteinsson, Jan Hajič, Jan Hajič jr., Mika Härmäläinen, Linh Hà Mỷ, Na-Rae Han, Muhammad Yudistira Hanifmuti, Takahiro Harada, Sam Hardwick, Kim Harris, Dag Haug, Johannes Heinecke, Oliver Hellwig, Felix Hennig, Barbora

Hladká, Jaroslava Hlaváčová, Florinel Hociung, Petter Hohle, Jena Hwang, Takumi Ikeda, Anton Karl Ingason, Radu Ion, Elena Irimia, Olájidé Ishola, Kaoru Ito, Siratun Jannat, Tomáš Jelínek, Apoorva Jha, Anders Johannsen, Hildur Jónsdóttir, Fredrik Jørgensen, Markus Juutinen, Sarveswaran K, Hüner Kaşıkara, Andre Kaasen, Nadezhda Kabaeva, Sylvain Kahane, Hiroshi Kanayama, Jenna Kanerva, Neslihan Kara, Ritván Karahóga, Boris Katz, Tolga Kayadelen, Jessica Kenney, Václava Kettnerová, Jesse Kirchner, Elena Klementieva, Elena Klyachko, Arne Köhn, Abdullatif Köksal, Kamil Kopacewicz, Timo Korhakangas, Mehmet Köse, Natalia Kotsyba, Jolanta Kovalevskaitė, Simon Krek, Parameswari Krishnamurthy, Sandra Kübler, Oğuzhan Kuyrukçu, Aslı Kuzgun, Sookyung Kwak, Veronika Laippala, Lucia Lam, Lorenzo Lambertino, Tatiana Lando, Septina Dian Larasati, Alexei Lavrentiev, John Lee, Phương Lê Hồng, Alessandro Lenci, Saran Lertpradit, Herman Leung, Maria Levina, Cheuk Ying Li, Josie Li, Keying Li, Yuan Li, KyungTae Lim, Bruna Lima Padovani, Krister Lindén, Nikola Ljubešić, Olga Loginova, Stefano Lusito, Andry Luthfi, Mikko Luukko, Olga Lyashevskaya, Teresa Lynn, Vivien Macke-tanz, Menel Mahamdi, Jean Maillard, Aibek Makazhanov, Michael Mandl, Christopher Manning, Ruli Manurung, Büşra Marşan, Cătălina Mărănduc, David Mareček, Katrin Marheinecke, Stella Markantonatou, Héctor Martínez Alonso, Lorena Martín Rodríguez, André Martins, Jan Mašek, Hiroshi Matsuda, Yuji Matsumoto, Alessandro Mazzei, Ryan McDonald, Sarah McGuinness, Gustavo Mendonça, Tatiana Merzhevich, Niko Miekka, Karina Mischenkova, Margarita Misir-pashayeva, Anna Missilä, Cătălin Mititelu, Maria Mitrofan, Yusuke Miyao, AmirHossein Mo-jiri Foroughani, Judit Molnár, Amirsaeid Moloodi, Simonetta Montemagni, Amir More, Laura Moreno Romero, Giovanni Moretti, Keiko Sophie Mori, Shinsuke Mori, Tomohiko Morioka, Shigeki Moro, Bjartur Mortensen, Bohdan Moskalevskyi, Kadri Muischnek, Robert Munro, Yugo Murawaki, Kaili Müürisep, Pinkey Nainwani, Mariam Nakhlé, Juan Ignacio Navarro Horñiacek, Anna Nedoluzhko, Gunta Nešpore-Běrzkalne, Manuela Nevaci, Lương Nguyễn Thị, Huyền Nguyễn Thị Minh, Yoshihiro Nikaido, Vitaly Nikolaev, Rattima Nitisaroj, Alireza Nourian, Hanna Nurmi, Stina Ojala, Atul Kr. Ojha, Adédayò Olúòkun, Mai Omura, Emeka Onwuegbuzia, Noam Ordan, Petya Osenova, Robert Östling, Lilja Øvrelid, Şaziye Betül Özateş, Merve Özçelik, Arzu-can Özgür, Balkız Öztürk Başaran, Teresa Paccosi, Alessio Palmero Aprosio, Hyunji Hayley Park, Niko Partanen, Elena Pascual, Marco Passarotti, Agnieszka Patejuk, Guilherme Paulino-Passos, Giulia Pedonese, Angelika Peljak-Lapińska, Siyao Peng, Cenek-Augusto Perez, Natalia Perkova, Guy Perrier, Slav Petrov, Daria Petrova, Andrea Peverelli, Jason Phelan, Jussi Piitu-lainen, Tommi A Pirinen, Emily Pitler, Barbara Plank, Thierry Poibeau, Larisa Ponomareva, Martin Popel, Lauma Pretkalniņa, Sophie Prévost, Prokopis Prokopidis, Adam Przepiórkowski, Tiina Puolakainen, Sampo Pyysalo, Peng Qi, Andriela Rääbis, Alexandre Rademaker, Mizan-ur Rahman, Taraka Rama, Loganathan Ramasamy, Carlos Ramisch, Fam Rashel, Moham-mad Sadegh Rasooli, Vinit Ravishankar, Livy Real, Petru Rebeja, Siva Reddy, Mathilde Reg-nault, Georg Rehm, Ivan Riabov, Michael Rießler, Erika Rimkutė, Larissa Rinaldi, Laura Rit-uma, Putri Rizqiyah, Luisa Rocha, Eiríkur Rögnvaldsson, Mykhailo Romanenko, Rudolf Rosa, Valentin Roşca, Davide Rovati, Ben Rozonoyer, Olga Rudina, Jack Rueter, Kristján Rúnarsson, Shoal Sadde, Pegah Safari, Benoît Sagot, Aleksí Sahala, Shadi Saleh, Alessio Salomoni, Tanja Samardžić, Stephanie Samson, Manuela Sanguinetti, Ezgi Saniyar, Dage Särg, Baiba Saulīte, Yanin Sawanakunanon, Shefali Saxena, Kevin Scannell, Salvatore Scarlata, Nathan Schneider, Sebastian Schuster, Lane Schwartz, Djamé Seddah, Wolfgang Seeker, Mojgan Seraji, Syeda Shahzadi, Mo Shen, Atsuko Shimada, Hiroyuki Shirasu, Yana Shishkina, Muh Shohibussirri, Dmitry Sichinava, Janine Siewert, Einar Freyr Sigurðsson, Aline Silveira, Natalia Silveira, Maria Simi, Radu Simionescu, Katalin Simkó, Mária Šimková, Kiril Simov, Maria Skachedubova, Aaron Smith, Isabela Soares-Bastos, Shafi Sourov, Carolyn Spadine, Rachele Sprugnoli, Vi-vian Stamou, Steinhórf Steingrímsson, Antonio Stella, Milan Straka, Emmett Strickland, Jana Str-nadová, Alane Suhr, Yogi Lesmana Sulestio, Umüt Sulubacak, Shingo Suzuki, Daniel Swanson, Zsolt Szántó, Chihiro Taguchi, Dima Taji, Yuta Takahashi, Fabio Tamburini, Mary Ann C. Tan, Takaaki Tanaka, Dipta Tanaya, Mirko Tavoni, Samson Tella, Isabelle Tellier, Marinella Testori, Guillaume Thomas, Sara Tonelli, Liisi Torga, Marsida Toska, Trond Trosterud, Anna Trukhina, Reut Tsarfaty, Utku Türk, Francis Tyers, Sumire Uematsu, Roman Untilov, Zdeňka Uřešová, Lar-raitz Uriá, Hans Uszkoreit, Andrius Utka, Elena Vagnoni, Sowmya Vajjala, Rob van der Goot, Martine Vanhove, Daniel van Niekerk, Gertjan van Noord, Viktor Varga, Uliana Vedenina, Eric Villemonte de la Clergerie, Veronika Vincze, Natalia Vlasova, Aya Wakasa, Joel C. Wallenberg, Lars Wallin, Abigail Walsh, Jing Xian Wang, Jonathan North Washington, Maximilan Wendt, Paul Widmer, Shira Wigderson, Sri Hartati Wijono, Seyi Williams, Mats Wirén, Christian Wit-

tern, Tsegay Woldemariam, Tak-sum Wong, Alina Wróblewska, Mary Yako, Kayo Yamashita, Naoki Yamazaki, Chunxiao Yan, Koichi Yasuoka, Marat M. Yavrumyan, Arife Betül Yenice, Olcay Taner Yıldız, Zhuoran Yu, Arlisa Yuliawati, Zdeněk Žabokrtský, Shorouq Zahra, Amir Zeldes, He Zhou, Hanzhi Zhu, Anna Zhuravleva, and Rayan Ziane. Universal dependencies 2.10, 2022. URL <http://hdl.handle.net/11234/1-4758>. LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University.

Shiyue Zhang, Vishrav Chaudhary, Naman Goyal, James Cross, Guillaume Wenzek, Mohit Bansal, and Francisco Guzmán. How robust is neural machine translation to language imbalance in multilingual tokenizer training? *arXiv preprint*, 2022. URL <https://arxiv.org/abs/2204.14268>.

Bo Zheng, Li Dong, Shaohan Huang, Saksham Singhal, Wanxiang Che, Ting Liu, Xia Song, and Furu Wei. Allocating large vocabulary capacity for cross-lingual language model pre-training. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 3203–3215, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.257. URL <https://aclanthology.org/2021.emnlp-main.257>.

Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. In *The IEEE International Conference on Computer Vision (ICCV)*, December 2015. URL https://www.cv-foundation.org/openaccess/content_iccv_2015/papers/Zhu_Aligning_Books_and_ICCV_2015_paper.pdf.

A ABSTRACT RECONSTRUCTIONS



Figure 6: PIXEL image reconstructions of the abstract with different span masks.

B CODE

PIXEL is implemented in PyTorch (Paszke et al., 2019) and built on HuggingFace transformers (Wolf et al., 2020). We make our code available at <https://github.com/xplip/pixel>. Our pretrained PIXEL model, including a large number of intermediate checkpoints, is available at <https://huggingface.co/Team-PIXEL/pixel-base> and our finetuned models, including multiple seeds each, are available at <https://huggingface.co/Team-PIXEL>.

C TEXT RENDERER DETAILS

Rendering backend We experimented with different text rendering backends. Following Salesky et al. (2021), our first implementation was based on PyGame,²⁴ which PIXEL was also pretrained with. Later on, we switched to a backend based on Pango (Taylor, 2004) and Cairographics,²⁵ which has native support for complex text layouts, makes it possible to specify fallback fonts, and has faster rendering speed. Without fallback fonts, we would be limited to a maximum number of $2^{16} - 1$ glyphs that can fit into a single OpenType or TrueType font file due to a technical limitation.²⁶ By leveraging fallback fonts, we can theoretically cover all Unicode codepoints.

Fonts We rely on the Google Noto Sans fonts collection,²⁷ which covers the majority of Unicode codepoints and is actively growing.²⁸ Note, however, that PIXEL is compatible with any font and can therefore encode anything that can be typeset on a computer screen. We used a font size of 8 at 120 DPI for pretraining with PyGame, which was selected manually to fit most scripts into a rendered height of 16px. It can, however, also be adjusted at finetuning time. For finetuning with PangoCairo, we use a font size of $8 \cdot (120/72) \approx 13.33$ which yields roughly the same outputs as the PyGame renderer. Due to how glyphs are shaped by the two backends, the outputs of the two renderers do not *exactly* match. Because we did not employ data augmentation to make PIXEL robust to such changes in font size, we recommend using the PyGame renderer it was pretrained with for *zero-shot* applications with PIXEL. When finetuning, this minor mismatch in rendering outputs is easily overcome by PIXEL, so we generally recommend using the PangoCairo renderer.

Characters versus glyphs For extractive QA, it is necessary to obtain a mapping between the characters in the context paragraph and where they appear on the rendered image. Obtaining this mapping is not straightforward due to how text is rendered. The *shaping* step in the rendering pipeline converts characters into glyphs.²⁹ In ligatures, as common for instance in Arabic, a glyph is composed of multiple characters. Likewise, an emoji often consists of a base codepoint and a modifier codepoint (e.g. to change the emoji skin colour) which are represented by a single glyph. For accents, on the other hand, one character might yield multiple glyphs.³⁰ In practice, the renderer therefore uses grapheme clusters, whose logical boundaries in the rendered image we can map to the input characters.³¹ For simplicity, we assign each codepoint of a grapheme cluster to the logical horizontal offset at which the cluster starts on the rendered image. Future work may investigate alternative mapping strategies.

RGB rendering PIXEL supports RGB rendering which may be useful to accurately represent colour emoji and for multimodal applications in the future. However, 24-bit RGB rendering is slightly slower than 8-bit grayscale rendering, which is why we made RGB rendering an optional setting. In our pretraining and finetuning experiments we rendered text in grayscale, and we generally recommend doing so when not working with coloured inputs.

²⁴<https://www.pygame.org/>

²⁵<https://www.cairographics.org/>

²⁶See https://en.wikipedia.org/wiki/Unicode_font for an explanation.

²⁷<https://fonts.google.com/noto>

²⁸See <https://notofonts.github.io/overview/> for an overview of Noto’s Unicode coverage.

²⁹See https://docs.gtk.org/Pango/pango_rendering.html for an overview of the rendering pipeline.

³⁰https://docs.gtk.org/Pango/pango_fonts.html#glyphs

³¹https://unicode.org/reports/tr29/#Grapheme_Cluster_Boundaries

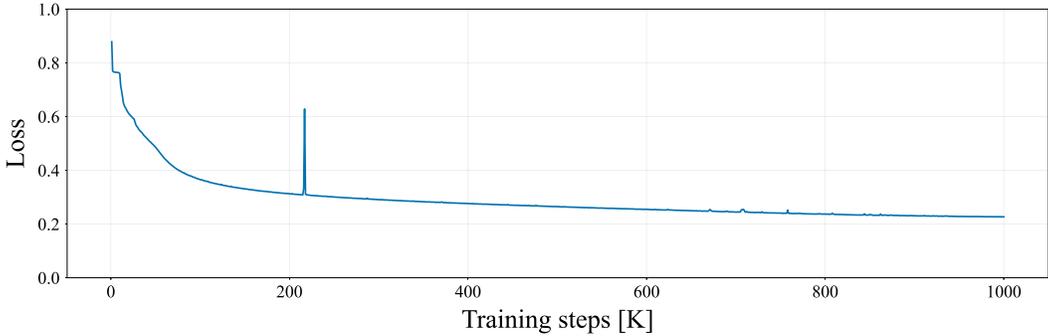


Figure 7: PIXEL pretraining loss curve

Right-to-left scripts PIXEL’s renderer natively supports right-to-left (RTL) writing. In the default setting, the base text direction (which for instance determines on which side of a sentence punctuation marks are placed) is inferred automatically by the rendering backend based on the first “strong directional” character in a given paragraph.³² The mirroring of RTL characters is also handled automatically according to their Unicode bidi attributes. Optionally, the base text direction can be set manually, which is useful when working on monolingual data, e.g. in Arabic or Hebrew, as the renderer does not have to go through the direction check. In §6, we describe limitations of how we currently handle RTL writing.

D ARCHITECTURE & PRETRAINING DETAILS

PARAMETER	VALUE
Image size	(16, 8464, 3)
Patch size P	16
Encoder hidden size D_{enc}	768
Encoder intermediate size	3072
Encoder num attention heads	12
Encoder num layers L	12
Decoder hidden size D_{dec}	512
Decoder intermediate size	2048
Decoder num attention heads	16
Decoder num layers K	8
Layer norm ϵ (Ba et al., 2016)	$1e-12$
Span masking ratio R	0.25
Span masking max length S	6
Span masking cumulative weights W	{0.2, 0.4, 0.6, 0.8, 0.9, 1}
Span masking spacing	Dynamic
Dropout probability	0.1
Hidden activation	GeLU (Hendrycks & Gimpel, 2016)
Optimizer	AdamW (Loshchilov & Hutter, 2019; Kingma & Ba, 2015)
Adam β	(0.9, 0.999)
Adam ϵ	$1e-8$
Weight decay	0.05
Peak learning rate	$1.5e-4$
Learning rate schedule	Cosine Decay (Loshchilov & Hutter, 2017)
Minimum learning rate	$1e-5$
Learning rate warmup ratio	0.05
Training steps	1M
Batch size	256

Table 6: PIXEL pretraining settings

Patch Embeddings PIXEL reshapes each image \mathbf{x} into a sequence of $N = W/P$ non-overlapping flattened 2D patches $\mathbf{x}_f \in \mathbb{R}^{N \times (P^2 C)}$, where $P = 16$ is the patch size, and linearly projects them via $\mathbf{E} \in \mathbb{R}^{(P^2 C) \times D_{\text{enc}}}$ to obtain patch embeddings $\mathbf{x}_p = (\mathbf{x}_f \mathbf{E}) \in \mathbb{R}^{N \times D_{\text{enc}}}$ with encoder hidden

³²See <https://unicode.org/reports/tr9/> for an overview of the Unicode bidi algorithm.

size $D_{\text{enc}} = P^2C = 768$.³³ Afterwards, fixed sinusoidal position embeddings $\mathbf{E}_{\text{pos}} \in \mathbb{R}^{(N+1) \times D_{\text{enc}}}$ are added, leaving out the position vector in position 0 for a classification (CLS) embedding later: $\tilde{\mathbf{x}}_p = \mathbf{x}_p + [\mathbf{E}_{\text{pos}}^1, \dots, \mathbf{E}_{\text{pos}}^{(N+1)}]$.

Span Masking PIXEL then masks out $R = 25\%$ of the $N = 529$ embedded patches via span masking with max span length $S = 6$ and cumulative span weights $W = \{0.2, 0.4, 0.6, 0.8, 0.9, 1\}$, i.e. $\mathbb{E}(s) = 3.1$, as outlined in Algorithm 1. Applying the mask \mathcal{M} , we obtain the unmasked patches $\tilde{\mathbf{x}}_{\text{vis}} = \{\tilde{\mathbf{x}}_p^i : i \notin \mathcal{M}\}_{i=0}^N$.

Encoder Following ViT-MAE (He et al., 2022), the PIXEL encoder only operates on unmasked patches (i.e., ≈ 396 patches at 25% masking) and a special CLS embedding with its positional encoding $\mathbf{c} = \mathbf{x}_{[\text{cls}]} + \mathbf{E}_{\text{pos}}^0 \in \mathbb{R}^{1 \times D_{\text{enc}}}$ is prepended to the sequence: $\mathbf{h}_0 = [\mathbf{c}, \tilde{\mathbf{x}}_{\text{vis}}] \in \mathbb{R}^{(1+\lfloor R \cdot N \rfloor) \times D_{\text{enc}}}$.³⁴ Let $\{\mathbf{h}_i\}_{i=1}^L$ be the encoder hidden states after each of the $L = 12$ encoder transformer layers, and \mathbf{h}_0 denotes the input sequence. The outputs of each transformer layer are computed as detailed in (Vaswani et al., 2017),³⁵ and the last layer’s output $\mathbf{h}_L \in \mathbb{R}^{(1+\lfloor R \cdot N \rfloor) \times D_{\text{enc}}}$ is passed to the decoder.

Decoder The PIXEL decoder first projects the encoder outputs via $\mathbf{E}_{\text{dec}} \in \mathbb{R}^{D_{\text{enc}} \times D_{\text{dec}}}$ to obtain decoder embeddings $\mathbf{x}_d = \mathbf{h}_L \mathbf{E}_{\text{dec}} \in \mathbb{R}^{(1+\lfloor R \cdot N \rfloor) \times D_{\text{dec}}}$, where $D_{\text{dec}} = 512$. Next, mask embeddings $\mathbf{x}_{[\text{mask}]} \in \mathbb{R}^{1 \times D_{\text{dec}}}$ are inserted at the masked-out positions and fixed sinusoidal position embeddings are added to obtain $\mathbf{d}_0 = [(\mathbf{x}_d \cup \{x_{[\text{mask}]} : i \in \mathcal{M}\}_{i=0}^N) + \mathbf{E}_{\text{pos}}] \in \mathbb{R}^{(N+1) \times D_{\text{dec}}}$. $\{\mathbf{d}_i\}_{i=1}^K$ are the decoder hidden states after each of the $K = 8$ decoder transformer layers, computed in the same way as the encoder hidden states, and \mathbf{d}_0 denotes the input sequence. There is no encoder-decoder cross-attention. The decoder output $\mathbf{d}_K \in \mathbb{R}^{(N+1) \times D_{\text{dec}}}$ is projected via $\mathbf{O} \in \mathbb{R}^{D_{\text{dec}} \times (P^2C)}$ to obtain patch-wise logits $\mathbf{o} = (\mathbf{d}_K \mathbf{O}) \in \mathbb{R}^{(N+1) \times (P^2C)}$. Finally, the CLS logits are removed and a normalized mean squared error (MSE) pixel reconstruction loss is computed: $\mathcal{L}_{\text{normpix}} = \frac{1}{|Q|} \sum_{i \in Q} |\text{normalize}(\mathbf{x}_f^i) - \mathbf{o}^i|^2$ with i denoting the indices in the set of *masked, non-blank (text) patches* $Q = \{i : i \in (\mathcal{M} \cap \mathcal{T})\}_{i=0}^N$ and $\text{normalize}(\cdot)$ dividing the difference between the target patch and its mean by its standard deviation.

E FINETUNING DETAILS

Table 7 gives an overview of all languages used in our finetuning experiments, Table 8 links to our finetuning datasets, and Table 9 lists the UD treebanks we used.

We list our finetuning recipes in Table 10 for POS tagging, dependency parsing, NER, QA, and XNLI and in Table 11 for the GLUE tasks. Due to compute limitations we did not run comprehensive hyperparameter sweeps. Instead, we relied on sensible priors from finetuning BERT and made slight modifications as needed. In most cases, hyperparameters that work well for BERT also work well for PIXEL. For some of the semantic tasks, in particular NLI and SST-2, we found that some random initializations did not converge. In those cases, minor tweaks to the learning rate or increasing the batch size usually helped. For GLUE, we found that PIXEL performed slightly better on some tasks with the PangoCairo renderer, whereas for others, using the PyGame renderer (which PIXEL was pretrained with) was more stable. We plan to further optimize the training recipes and study PIXEL’s convergence behaviour in the future.

³³This is equivalent to projecting each rendered image $\mathbf{x} \in \mathbb{R}^{H \times W \times C}$ via a 2D-convolutional layer with C input channels and D_{enc} output channels and kernel size and stride both equal to the patch size P , which we do in practice.

³⁴In pretraining, no loss is computed for the CLS embedding but it can optionally be used when finetuning PIXEL for sequence-level downstream tasks.

³⁵Note that encoder and decoder do not attend to the blank (padding) patches that appear after the EOS patch.

Language	ISO 639-3	Language Family	Script
Amharic	AMH	Afro-Asiatic	Ge'ez
Arabic	ARA	Afro-Asiatic	Arabic
Bengali	BEN	Indo-European	Bengali
Bulgarian	BUL	Indo-European	Cyrillic
Chinese	ZHO	Sino-Tibetan	Chinese
Coptic	COP	Afro-Asiatic	Coptic
English	ENG	Indo-European	Latin
Finnish	FIN	Uralic	Latin
French	FRA	Indo-European	Latin
German	DEU	Indo-European	Latin
Greek	ELL	Indo-European	Greek
Hausa	HAU	Afro-Asiatic	Latin
Hindi	HIN	Indo-European	Devanagari
Igbo	IBO	Niger-Congo	Latin
Indonesian	IND	Austronesian	Latin
Japanese	JPN	Japonic	Japanese
Kinyarwanda	KIN	Niger-Congo	Latin
Korean	KOR	Koreanic	Korean
Luganda	LUG	Niger-Congo	Latin
Luo	LUO	Nilo-Saharan	Latin
Naija Pidgin	PCM	English Creole	Latin
Russian	RUS	Indo-European	Cyrillic
Spanish	SPA	Indo-European	Latin
Swahili	SWA	Niger-Congo	Latin
Tamil	TAM	Dravidian	Tamil
Telugu	TEL	Dravidian	Telugu
Thai	THA	Kra-Dai	Thai
Turkish	TUR	Turkic	Latin
Urdu	URD	Indo-European	Perso-Arabic
Vietnamese	VIE	Austro-Asiatic	Latin
Wolof	WOL	Niger-Congo	Latin
Yorùbá	YOR	Niger-Congo	Latin

Table 7: Overview of languages used in our experiments.

Dataset	Download Link	Reference
Universal Dependencies 2.10	https://lindat.mff.cuni.cz/repository/xmlui/handle/11234/1-4758	(Zeman et al., 2022; Nivre et al., 2020)
MasakhaNER	https://github.com/masakhane-io/masakhane-ner/tree/main/data	(Adelani et al., 2021)
GLUE	https://huggingface.co/datasets/glue	(Wang et al., 2018)
TyDiQA-GoldP	https://huggingface.co/datasets/tydiqa	(Clark et al., 2020)
SQuADv1.1	https://huggingface.co/datasets/squad	(Rajpurkar et al., 2016)
KorQuAD 1.0	https://huggingface.co/datasets/squad_kor_v1	(Lim et al., 2019)
JaQuAD	https://huggingface.co/datasets/SkelterLabsInc/JaQuAD	(So et al., 2022)
XNLI	https://huggingface.co/datasets/xnli	(Conneau et al., 2018)

Table 8: Links and references to the datasets we used in our finetuning experiments.

Language	Treebank	#Sentences	Reference
ENG	English-EWT	16621	Silveira et al. (2014)
ARA	Arabic-PADT	7664	Hajić et al. (2009)
COP	Coptic-Scriptorium	2011	Zeldes & Abrams (2018)
HIN	Hindi-HDTB	16647	Palmer et al. (2009)
JPN	Japanese-GSD	8100	Asahara et al. (2018)
KOR	Korean-GSD	6339	Chun et al. (2018)
TAM	Tamil-TTB	600	Ramasamy & Žabokrtský (2012)
VIE	Vietnamese-VTB	3000	Nguyen et al. (2009)
ZHO	Chinese-GSD	4997	Shen et al. (2016)

Table 9: Overview of the Universal Dependencies v2.10 (Zeman et al., 2022; Nivre et al., 2020) treebanks used in our POS tagging and dependency parsing experiments with the number of sentences in their respective training splits. As mentioned in §3.1, these treebanks were chosen with typological and script diversity in mind.

PARAMETER	POS	DP	NER	QA	XNLI
Rendering backend			PangoCairo		
Classification head pooling	—	—	—	—	CLS
Optimizer			AdamW		
Adam β			(0.9, 0.999)		
Adam ε			$1e-8$		
Weight decay			0		
Learning rate	$5e-5$	$\{5e-5, 8e-5\}$	$5e-5$	$\{3e-5, 5e-5, 7e-5\}$	$2e-5$
Learning rate warmup steps	100	100	100	100	1000
Learning rate schedule			Linear decay		
Max sequence length	256	256	196	400	196
Stride	—	—	—	160	—
Batch size	64	64	64	32	256
Max steps	15000	15000	15000	20000	50000
Early stopping			✓		
Eval steps	500	500	500	500	1000
Dropout probability			0.1		

Table 10: Finetuning settings for POS tagging, dependency parsing (DP), NER, QA, and XNLI. We did not run a comprehensive hyperparameter search due to compute limitations; these settings were manually selected based on a small number of preliminary runs. Maximum performance was often reached well before the specified number of max steps.

PARAMETER	MNLI	QQP	QNLI	SST-2	COLA	STS-B	MRPC	RTE	WNLI
Rendering backend	PangoCairo	PyGame	PangoCairo	PyGame	PyGame	PyGame	PyGame	PyGame	PyGame
Classification head pooling					Mean				
Optimizer					AdamW				
Adam β					(0.9, 0.999)				
Adam ε					$1e-8$				
Weight decay					0				
Learning rate	$3e-5$	$3e-5$	$3e-5$	$3e-5$	$2e-5$	$2e-5$	$3e-5$	$3e-5$	$1e-5$
Learning rate warmup steps	100	100	100	100	200	100	100	200	100
Learning rate schedule					Linear decay				
Max sequence length					256				
Batch size	64	256	64	256	256	64	64	64	256
Max steps	15000	15000	15000	15000	15000	15000	15000	15000	400
Early stopping					✓				
Eval interval	500 steps	500 steps	500 steps	500 steps	100 steps	100 steps	100 steps	250 steps	1 epoch
Dropout probability					0.1				

Table 11: Finetuning settings for GLUE tasks. We did not run a comprehensive hyperparameter search due to compute limitations; these settings were manually selected based on a small number of preliminary runs. Increasing the batch size to 256 and switching to the PyGame renderer helped achieve more consistent convergence behaviour for some tasks. For the smaller datasets (to the right of QQP), maximum performance was reached well before the specified number of max steps.

F FURTHER ANALYSIS

To investigate where PIXEL currently lags behind BERT, we analyse the impact that dependency length has on both models in dependency parsing in ENG. We can see in Figure 8 that the LAS gap between BERT and PIXEL increases with longer dependencies, indicating that PIXEL struggles slightly more with long syntactic dependencies.

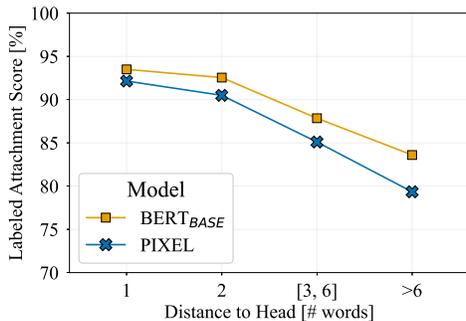


Figure 8: LAS scores (ENG) across different dependency lengths averaged over 5 random initializations of BERT and PIXEL. In ENG, long syntactic dependencies are more challenging for PIXEL.

	#L	θ	ENG	ARA	BUL	DEU	ELL	FRA	HIN	RUS	SPA	SWA	THA	TUR	URD	VIE	ZHO
MBERT	104	179M	83.3	73.2	77.9	78.1	75.8	78.5	70.1	76.5	79.7	67.2	67.7	73.3	66.1	77.2	77.7
BERT	1	110M	83.7	64.8	69.1	70.4	67.7	72.4	59.2	66.4	72.4	62.2	35.7	66.3	54.5	67.6	46.2
PIXEL	1	86M	77.2	58.9	66.5	68.0	64.9	69.4	57.8	63.4	70.3	60.8	50.2	64.0	54.1	64.8	52.0

Table 12: Results for PIXEL and BERT finetuned on XNLI in the *translate-train-all* setting where we train on the joint training data in all 15 languages, originally translated from ENG by Conneau et al. (2018). We report test set accuracy averaged over 5 runs each. Despite the relatively large performance gap in favor of BERT in ENG (which is in line with the GLUE results in Table 3), the gap is much smaller for other languages, particularly those not using the Latin writing system. PIXEL is overall more consistent across scripts, outperforming BERT in THA and ZHO.

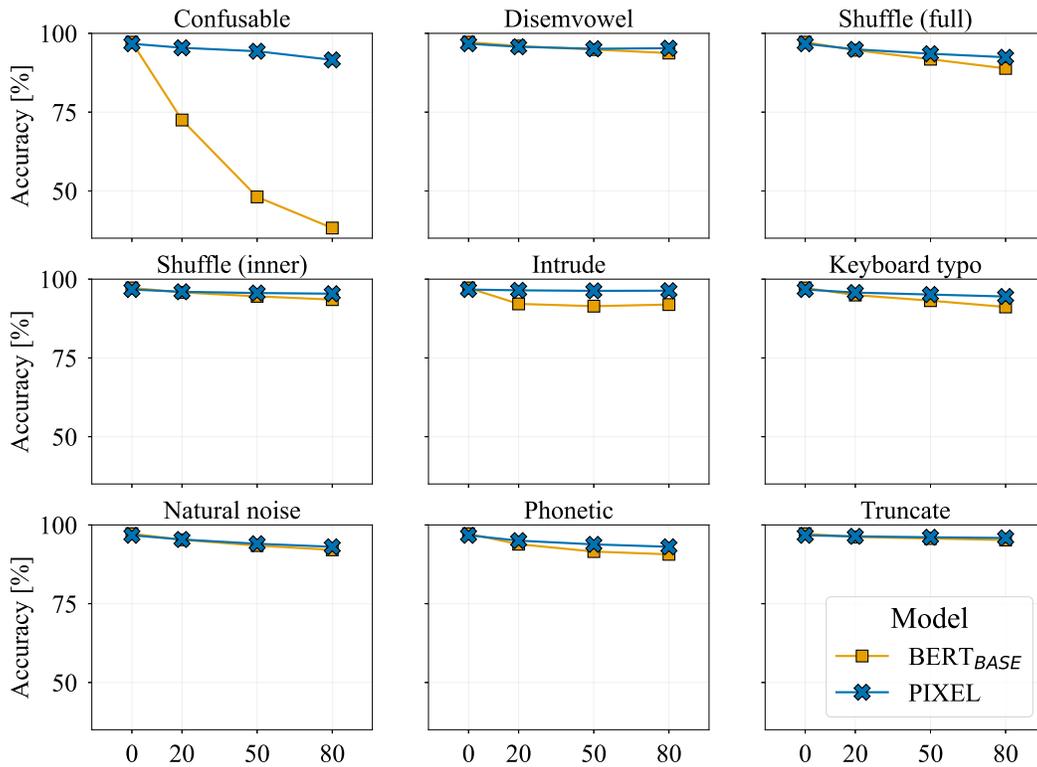


Figure 9: Test set accuracy for a single run of PIXEL and BERT across different levels of noise introduced through various orthographic attacks in POS tagging. The results show that PIXEL is more robust than BERT to most of these attacks, especially when dealing with visually-confusable character substitutions. SEGMENTATION is not applied to the task of POS tagging, since the joined words would not have a proper tag.