

---

# Proof Artifact Co-training for Theorem Proving with Language Models

---

Jesse Michael Han<sup>1</sup> Jason Rute<sup>2</sup> Yuhuai Wu<sup>3</sup> Edward W. Ayers<sup>4</sup> Stanislas Polu<sup>5</sup>

## Abstract

Labeled data for imitation learning of theorem proving in large libraries of formalized mathematics is scarce as such libraries require years of concentrated effort by human specialists to be built. This is particularly challenging when applying large Transformer language models to tactic prediction, because the scaling of performance with respect to model size is quickly disrupted in the data-scarce, easily-overfitted regime. We propose PACT (**P**roof **A**rtifact **C**o-**T**raining), a general methodology for extracting abundant self-supervised data from kernel-level proof terms for co-training alongside the usual tactic prediction objective. We apply this methodology to Lean, an interactive proof assistant which hosts some of the most sophisticated formalized mathematics to date. We instrument Lean with a neural theorem prover driven by a Transformer language model and show that PACT improves theorem proving success rate on a held-out suite of test theorems from 32% to 48%.

## 1. Introduction

Deep learning-driven automated theorem proving in large libraries of formalized mathematics (henceforth “neural theorem proving”) has been the focus of increased attention in recent years. Labeled data for imitation learning of theorem proving is scarce—formalization is notoriously labor-intensive, with an estimated cost of 2.5 man-years per megabyte of formalized mathematics (Wiedijk, 2000), and complex projects require years of labor from human specialists. Within a fixed corpus of (possibly unproven) theorem statements, it is possible to augment a seed dataset of human proofs with new successful trajectories using reinforcement learning or expert iteration. However, this is quite computationally intensive, and without a way to expand the

curriculum of theorems, the agent will inevitably saturate and suffer from data starvation.

Data scarcity is a particularly thorny obstruction for applying large language models (LLMs) to neural theorem proving. LLMs have achieved spectacular success in data-rich regimes such as plain text (Brown et al., 2020), images (Dosovitskiy et al., 2020), and joint text-image modeling (Radford et al.), and the performance of decoder-only Transformers has been empirically shown to obey scaling power laws in model and data size (Henighan et al., 2020). However, existing datasets of human proof steps for neural theorem proving are extremely small and exist at scales at which overfitting occurs extremely rapidly, disrupting the scaling of performance with respect to model size (Kaplan et al., 2020).

We make two contributions towards addressing the problem of data scarcity in the context of formal mathematics. First, we introduce PACT (**P**roof **A**rtifact **C**o-**T**raining), a general methodology for extracting self-supervised auxiliary tasks for co-training a language model alongside a tactic prediction objective for interactive theorem proving. Second, we present LEANSTEP, a collection of datasets and a machine learning environment for the Lean 3 theorem prover with support for PACT, supervised learning of tactic prediction, theorem proving evaluation, and reinforcement learning.

We train large language models on these data and demonstrate that PACT significantly improves theorem proving success rate on a held-out suite of test theorems, from 32% to 48%. We then embark on a careful study of the effects of pre-training vs. co-training and show that PACT combined with *WebMath* pre-training (Polu & Sutskever, 2020) achieves the lowest validation loss and theorem proving success rate. Finally, on an out-of-distribution collection of thousands of theorems (some involving novel definitions) added to Lean’s mathematical library after we extracted our train/test data, we achieve a theorem proving success rate of 37%, suggesting strong generalization and usefulness at the frontier of formalized mathematics.

## 2. Background

**Lean** Lean is an interactive theorem prover and functional programming language (de Moura et al., 2015). It has an

---

<sup>1</sup>University of Pittsburgh, Pittsburgh, PA, USA <sup>2</sup>CIBO Technologies, Cambridge, MA, USA <sup>3</sup>University of Toronto, ON, Canada <sup>4</sup>University of Cambridge, Cambridge, UK <sup>5</sup>OpenAI, San Francisco, CA, USA. Correspondence to: Jesse Michael Han <jmh288@pitt.edu>.

extremely active community and is host to some of the most sophisticated formalized mathematics in the world, including scheme theory (Buzzard et al., 2019), forcing (Han & van Doorn, 2020), perfectoid spaces (Buzzard et al., 2020), and condensed mathematics (Scholze, 2020).

Lean’s fundamental logic is a dependent type theory called the calculus of inductive constructions (Pfenning & Paulin-Mohring, 1989). This design means that terms ( $\lambda, x + y, f$ ), types ( $\mathbb{N}, \text{list } \mathbb{Z}, \alpha \rightarrow \beta$ ) and proofs are all represented with a single datatype called an *expression*. Given an environment of available constants and definitions and a context  $\Gamma$  of variables, Lean can infer a type  $\alpha$  for each well-formed expression  $t$ . A *proof term* is a Lean expression whose type is a proposition. This proof term serves as a checkable artifact for verifying the proposition. Lean uses a small, trusted kernel to verify proof terms.

**mathlib** The primary repository of formalized mathematics in Lean is `mathlib` (mathlib, 2020). At the time of writing, 140 contributors have contributed almost 500,000 lines of code; `mathlib` sports over 46,000 formalized lemmas backed by over 21,000 definitions. `mathlib` runs the gamut of mathematics, covering algebraic geometry, computability, measure theory, category theory and many more topics. The range of theories and the monolithic, unified organization of `mathlib` makes it an excellent foundation for a neural theorem proving dataset.

**Tactics** Tactics in Lean are metaprograms (Ebner et al., 2017), which can construct Lean expressions, such as terms (for example the tactics in Figure 2 produce the proof term in Figure 1). A *tactic state* which tracks the list of open goals and other metadata is threaded through each tactic invocation. Lean has special support for treating tactics as an extensible domain-specific language (DSL); this DSL is how Lean is typically used as an interactive theorem prover. The DSL amounts to a linear chain of comma-separated invocations. The process of interactive proving is mediated through Lean’s language server, which will present the context and type for the current goal (e.g. the red boxes in Figure 1) in the proof to the user, dependent on where their cursor is in the source text. The *tactic prediction* task is to predict the next tactic given this goal state. We extract supervised training data for this task by extracting all human-supplied proof steps from Lean’s `mathlib`.

## 2.1. Related work

### Machine learning in interactive theorem proving

While automated theorem proving has long been a major component of classical AI, among the first applications of machine learning to interactive and automated theorem proving was lemma selection (Urban, 2004; Alama et al., 2014; Kaliszky & Urban, 2015c; Irving et al., 2016). This includes

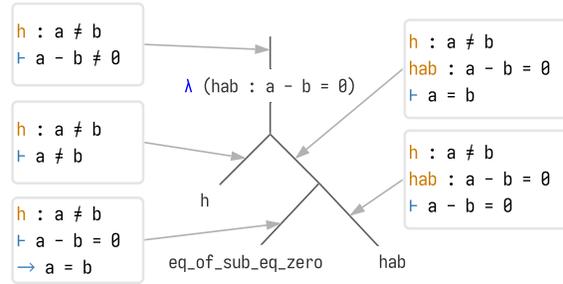


Figure 1. For each point in a proof term, Lean provides a context and a type of the expression at that point in the term. This can be used to create a dataset.

```
lemma sub_ne_zero_of_ne (h : a ≠ b) : a - b ≠ 0 :=
begin
  intro hab,
  apply h,
  apply eq_of_sub_eq_zero hab
end
```

Figure 2. A tactic proof script found in `mathlib`. Here three tactics have been used. This script produces the proof term shown in Figure 1.

the lemma selection in `hammers` (Blanchette et al., 2016) which use naive Bayes and other ML algorithms to filter relevant lemmas to send to an automated theorem prover.

More recently, progress has been made in directly applying deep learning to prove theorems (Rocktäschel & Riedel, 2017; Evans et al., 2018; Selsam et al., 2019; Lederman et al., 2020). The logic and mathematics in some of these works is usually more geared to logical syllogisms or industrial problems (e.g. logical search in a relational database or SAT solving).

Our work focuses on abstract mathematics as seen in mathematical research and education, which is formalized in interactive theorem provers (ITPs) such as Lean. More directly related to our work are machine learning based provers for tactic-based ITPs, including `TacticToe` (Gauthier et al., 2018) for `HOL4`; `HOList/DeepHOL` (Bansal et al., 2019b;a; Paliwal et al., 2020) for `HOL Light`; and `CoqGym/ASTactic` (Yang & Deng, 2019), `ProverBot9001` (Sanchez-Stern et al., 2020) and `Tactician` (Blaauwbroek et al., 2020) for `Coq`. These works, similar to ours, use learned models which suggest tactics for a given tactic state, and when combined with a search algorithm, are able to build complete proofs. A significant difference between our work and these others is that our Transformer-based policy is able to freely

---

synthesize complete tactics, including tactic combinators and tactics with expression parameters. Other models limit the tactic grammar to only produce tactics with simple parameters (*e.g.* theorem names) or select tactics exactly as they appear in the dataset (possibly with small modifications to variable names). Such approaches unnecessarily constrain the model, especially in situations where the user needs to supply an existential witness (in the form of an expression) to the tactic.

The Mizar Mathematical Library is based on first order logic, and derived Mizar datasets (Urban, 2004; Kaliszzyk & Urban, 2015b) have formed important benchmarks and training data for many first-order automatic theorem proving projects, including ones utilizing machine learning (Urban et al., 2011; Kaliszzyk & Urban, 2015a; Jakubův & Urban, 2017), deep learning (Irving et al., 2016; Jakubův & Urban, 2019), and reinforcement learning (Kaliszyk et al., 2018). More recently, language modelling with a GPT-2 scale Transformer was applied to conjecturing and proof synthesis using Mizar source code and other Mizar derived datasets (Urban & Jakubův, 2020). Our work expands on this direction in many ways. First, our dataset and interactive environment allow us to feed intermediate proof states as input to the Transformer. While this requires more engineering than feeding in raw source code, it greatly improves the results since our model can predict one step at a time instead of a whole proof at once, which allows for proof search via backtracking. Furthermore, while the Mizar language model was trained on a variety of proofs formats, some human-readable and some formal, each dataset was used to train a separate Transformer. Our work shows a significant advantage of co-training for theorem proving.

Metamath is another interactive theorem prover which does not use tactics, but instead relies on a low-level proving framework. Neural provers for Metamath such as Holophrasms (Whalen, 2016), MetaGen (Wang & Deng, 2020), and GPT-f (Polu & Sutskever, 2020) all use sequence or language models to generate tactics. Specifically, our work builds on Metamath GPT-f (Polu & Sutskever, 2020) (MM GPT-f), which uses a Transformer architecture to generate proof steps. Unlike MM GPT-f, which trained primarily on the Metamath proof step objective (*i.e.* guessing the next lemma to be applied to a goal, and subsumed by our NEXTLEMMA task, *c.f.* Section 3.2), we co-train on a diverse suite of self-supervised tasks extracted from Lean proof terms and demonstrate significant improvements in theorem proving performance.

**Reasoning with Transformers** Besides theorem proving, a number of recent papers have shown that language models, especially Transformers, are capable of something like mathematical and logical reasoning in integration (Lample & Charton, 2020), differential equations (Charton et al.,

2020), Boolean satisfiability (Finkbeiner et al., 2020), and inferring missing proof steps (Li et al., 2021).

A closely-related vein of work has shown that pre-training Transformers on data engineered to reflect inductive biases conducive to mathematical reasoning is beneficial for downstream mathematical reasoning tasks (Rabe et al., 2020; Wu et al., 2021). Our work both builds on and departs from these ideas in several crucial aspects. Unlike skip-tree training (Rabe et al., 2020), which focuses solely on predicting masked subterms of theorem *statements*, PACT derives its self-supervised training data from far more complex *proofs*. Unlike LIME (Wu et al., 2021), which uses purely synthetic data and is presented as a pre-training methodology, our self-supervised tasks are extracted from non-synthetic human proofs. Moreover, we show that not only are Transformers capable of performing well on auxiliary tasks gathered from low-level proof artifact data, but that we can directly leverage this data via co-training to greatly improve performance on high-level theorem proving.

Neural tactic proving can be seen as a special case of neural program synthesis, and our ideas may be applicable there as well, *e.g.* by co-training a program synthesis model using self-supervised data extracted from compiled low-level machine instructions. A related approach was taken by (Cummins et al., 2020), where a GNN is conditioned on a low-level IR to assist in compiler optimizations. In a similar vein to our work, (Selsam et al., 2020) hook a Transformer encoder into the interpreter of a Scheme dialect with a primitive for nondeterministic choice and demonstrate meta-learning after training it to function as an oracle on a diverse suite of tasks.

**Self-supervised learning methods** Recently, self-supervised methods have revolutionized machine learning models across various domains, such as natural language understanding (Logeswaran & Lee, 2018; Radford et al., 2018; Devlin et al., 2019; Song et al., 2019; Dong et al., 2019; Raffel et al., 2020; Conneau & Lample, 2019), computer vision (Vincent et al., 2008; Doersch et al., 2015; Noroozi & Favaro, 2016; Pathak et al., 2016; Gidaris et al., 2018; van den Oord et al., 2018), and reinforcement learning (Jaderberg et al., 2017; Jang et al., 2018; Laskin et al., 2020). These methods rely on automatically generating labels for a large quantity of cheaply mined data, which is then used to create auxiliary tasks. Training on the auxiliary tasks has been shown to greatly improve performance sample efficiency on downstream tasks, and even improve the adversarial robustness of models (Hendrycks et al., 2019; Carmon et al., 2019; Chen et al., 2020). For text, the most popular approach is based on language modeling with next-word prediction tasks (Radford et al., 2018; Devlin et al., 2019). The advent of the Transformer architecture (Vaswani et al.,

---

2017) and BERT style pretraining (Devlin et al., 2019) achieved a huge improvement in many natural language understanding tasks. Since then, an explosion of research activity around better pretraining tasks has further improved the quality of language models.

Our proposed method also makes use of automatically generated labels on a large quantity of cheaply-mined data, *i.e.* extant proof artifacts. The notable differences from existing methods are (1) our auxiliary tasks are specifically designed for theorem proving, and (2) most of the existing text-based self-supervised methods use auxiliary tasks for pretraining, whereas we investigate whether co-training can bring further benefits and make better use of auxiliary tasks.

**Machine learning with proof artifacts** The idea of mining low-level proof artifacts was previously explored in the context of automated lemma extraction (Kaliszyk & Urban, 2015c; Kaliszyk et al., 2015). It has also been previously observed that training on fully elaborated Coq terms (Nie et al., 2020) helps with a downstream theorem naming task. However, similar to previous work on skip-tree training, their dataset focuses solely on theorem statements, *i.e.* types, does not cover the far more complex proof terms, and does not evaluate the effect of such training on theorem proving evaluations.

While there exist environments and datasets for other formal mathematics libraries (Kaliszyk et al., 2017; Li et al., 2021; Huang et al., 2018; Kaliszyk & Urban, 2015b), LEANSTEP is the first and only tactic proof dataset for the Lean theorem prover. This makes available a large set of formal mathematical data to researchers covering a diverse and deep spectrum of pure mathematics. Moreover, LEANSTEP is unique in that it contains both high-level human-written tactics as well as kernel-level proof terms, which enables the extraction of self-supervised tasks for PACT (Section 3.2).

### 3. The LEANSTEP datasets and machine learning environment

We describe our datasets and instrumentation of the Lean theorem prover, including data extraction procedures and a generic best-first search algorithm for automated theorem proving with a language model. While our data pipeline can be instantiated at any Lean project, enabling the generation of bespoke, domain-specific datasets, we henceforth focus on `mathlib`, Lean’s mathematical components library.

#### 3.1. Human tactic proof steps

As seen in Figure 3, Lean tactic proofs consist of comma-separated tactic commands. At the start of the proof the user is prompted with a goal to prove. That goal is proceeded by a list of hypotheses and declared local variables. In Lean,

such goals are the user-facing representation of the tactic state. The user enters instructions for modifying the tactic state called tactic commands using Lean’s tactic DSL. If the tactic command is successful, the user will be prompted with one or more new goals. The user repeats this process until all goals are closed, thereby solving the theorem.

Our human tactic proof step dataset consists of source-target pairs of strings, one for each tactic command in the Lean core library and in `mathlib`. The source string is the pretty-printed tactic state. The target string is the tactic command as entered by a human in the source code to modify the tactic state. We train language models autoregressively to complete the source with the target Section 4.1. We refer to the task of predicting the next human tactic proof step given a tactic state as the *proofstep objective*.

Lean’s parser is special in that syntax can change significantly mid-code. While this makes it possible to utilize custom mathematical syntax and domain specific tactic languages, it makes it near impossible to parse Lean code outside of using Lean itself. Our solution was a mixed approach where we used Lean’s extensive meta-programming framework to hook into the Lean parser and tactic framework, extracting the tactic goals and various parser position information. Then we used a simple homemade Lean parser to combine this information and extract the tactic commands.

#### 3.2. Proof artifact co-training

In this section, we describe the PACT task suite and how training examples for these tasks are extracted.

For every proof term  $\tau$ , we record the type  $\Gamma$  of  $\tau$ , its name `nm`, and a list `ps` of all premises (*i.e.* named references to other lemmas in the library) which are used in  $\tau$ . We then recurse through  $\tau$ , tracking a list `bs` of bound variables which we update whenever navigating into the body of a  $\lambda$ -expression. At every sub-term  $\tau' \subseteq \tau$  we record  $\tau'$ , its type  $\Gamma'$ , the current state of `bs`, and the following data:

1. A *tactic state*, where the goal is set to be  $\Gamma'$  and the list of hypotheses in the local context is set to be the list `bs`, *i.e.* those bound variables in scope at  $\tau'$ .
2. A *partial proof term*, *i.e.*  $\tau$  with  $\tau'$  masked out.
3. A *premise selection bitmask*, *i.e.* Boolean labels for every `p` in `ps` indicating whether `p` is used in  $\tau'$ .
4. A *local context bitmask*, *i.e.* similar Boolean labels for every `b` in `bs` indicating whether `b` is used in  $\tau'$ .
5. An optional *next lemma*: if the first step of  $\tau'$  is to apply a premise `p` in `ps`, we record `p`.

Whenever we record a term, we record both *pretty-printed* and far more explicit *fully elaborated* versions of it. The

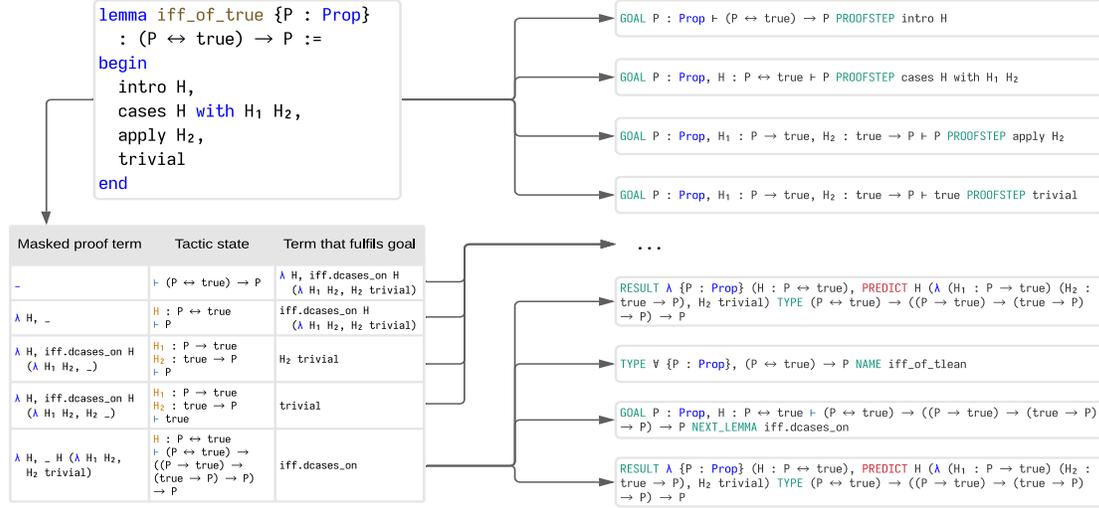


Figure 3. An illustration of our data extraction procedures. The entry point is the top-level theorem `iff_of_true`. (Top) We gather human proof step data by stepping through the supplied tactic proof script, recording the tactic state and subsequent tactic application. We train a Transformer language model on the sequence `GOAL ... PROOFSTEP ...`. When using our model for proof search, we only prompt it using `GOAL ... PROOFSTEP` to generate tactic applications. (Bottom) We gather data for PACT by recursing through all subterms of the proof term produced by the tactic script. We generate training examples in a self-supervised fashion, creating many auxiliary tasks which we disambiguate from the primary `PROOFSTEP` task using specially chosen prompt keywords.

fully elaborated terms explicitly display enormous amounts of type information which are usually silently inferred by Lean. From these data, we assemble the following language modeling tasks:

1. **Next lemma prediction.** Given the tactic state, predict the next lemma to be applied.
2. **Proof term prediction.** Given the tactic state, predict the entire proof term  $\tau'$ .
3. **Skip-proof.** Given the partial proof term, predict the masked-out subterm  $\tau'$ .
4. **Type prediction.** Given the partial proof term, predict the type  $\Gamma'$  of the masked-out subterm  $\tau'$ .
5. **Tactic state elaboration.** Given the tactic state, predict the fully elaborated tactic state.
6. **Proof term elaboration.** Given  $\tau$ , predict the fully elaborated version of  $\tau$ .
7. **Premise classification.** Given the tactic state and a premise  $p \in \text{ps}$ , predict either `<TRUE>` or `<FALSE>` according to the premise selection bitmask.
8. **Local context classification.** Given the tactic state (which consists of a list of local assumptions  $\text{bs}$  and the goal  $\Gamma'$ ), predict the sublist of  $\text{bs}$  which is true on the local context bitmask.

9. **Theorem naming.** Given the type  $\Gamma$  of the top-level proof term  $\tau$ , predict the name  $\text{nm}$ .

We formulate the premise classification task in terms of predicting a bit given the tactic state and premise instead of predicting the sublist of all positive premises according to the premise selection bitmask because there are often an order of magnitude more premises than hypotheses in the local context.

We remark that our next lemma prediction task is precisely the low-level `PROOFSTEP` objective studied in (Polu & Sutskever, 2020), and our skip-proof task superficially resembles, but is much more difficult than the skip-tree task studied in (Rabe et al., 2020), as proof terms tend to be far more complicated than the syntax trees of the theorem statement. Our classification tasks are closely related to the proof step classification examples studied by (Kaliszyk et al., 2017). We also note that by `mathlib` convention, theorem names are compact snake-cased English descriptions of the type signature, so the theorem naming task is akin to a translation/summarization task.

### 3.3. The LEANSTEP machine learning environment

We instrument Lean for automatic theorem proving with a language model, including utilities for (1) setting the runtime environment at a particular theorem (ensuring proofs are never circular), (2) serializing the tactic state as environment observations for a theorem-proving agent, (3)

---

exposing Lean’s parser to re-parse strings emitted by a language model into tactic invocations, and (4) executing and capturing the results of the re-parsed tactics, enabling the recording of trajectories for expert iteration and reinforcement learning.

In addition to this general instrumentation, we implement a generic best-first search algorithm for theorem proving; it forms the basis for our evaluations and is written entirely in Lean itself. The algorithm is parametrized by an oracle  $\Omega : \text{tactic\_state} \rightarrow \text{list}(\text{string} \times \text{float})$  that accepts a tactic state and returns a list of strings and heuristic scores. The search is controlled by a priority queue of *search nodes*, which consist of a tactic state (*i.e.* a partial proof) and search metadata. In the outer loop of the algorithm—which continues until either the theorem is completely proved (*i.e.* no goals are remaining on the current node), the priority queue is empty (*i.e.* the search has failed), or a pre-set timeout or budget of iterations is exceeded—we pop a node off the queue, serialize the associated tactic state and use it query the oracle, producing a list of candidates  $cs : \text{list}(\text{string} \times \text{float})$ . We then loop over the candidates  $cs$  to produce a list of new search nodes, by re-parsing each string into a tactic and adding a new node if the parsed tactic advances the proof without raising errors. These new search nodes are then re-inserted into the queue in order of decreasing priority and the search continues. We optionally constrain the search by enforcing maximum width and depth limits  $w_{\max}$  and  $d_{\max}$  that guard insertion into the queue. When considering nodes for insertion, any node whose depth exceeds  $d_{\max}$  is ignored, and all nodes are ignored if the queue size is strictly larger than  $w_{\max}$ . Due to the flexibility in assigning heuristic scores and in choosing the maximum width and depth hyperparameters, our algorithm is quite general—for example, it reduces to (1) a greedy depth-first search when  $w_{\max} = 0$ , and (2) a naïve breadth-first search when heuristic scores are identical and  $w_{\max} = d_{\max} = \infty$ .

Our interface is completely generic, enabling researchers to seamlessly integrate custom backends for rapid experimentation. We provide three default backends. The `tidy` backend queries a constant oracle which always returns a curated list of tactics. When run as a greedy depth-first search, the `tidy` proof search replicates the logic of an eponymous tactic in Lean’s `mathlib`, which was modeled after the human-like automated theorem prover proposed by (Ganesalingam & Gowers, 2017) and is one of Lean’s strongest general purpose tactics; it becomes even stronger when allowed to backtrack, as in the full best-first search. The `fairseq` backend supports querying a locally hosted Transformer via the Fairseq CLI (Ott et al., 2019), returning a list of candidates found by beam search, ranked by cumulative log-probabilities. Finally, the `gptf` backend queries our models hosted by the OpenAI API (Brown et al., 2020),

returning a list of candidates sampled from the model along with their cumulative log-probabilities.

## 4. Experiments

### 4.1. Training

In all of our experiments we use decoder-only Transformers similar to GPT-3 (Brown et al., 2020). Unless mentioned otherwise, all of our models have 24 layers with  $d_{\text{model}} = 1536$  and 24 heads, accruing to 837M trainable parameters. They are also pre-trained on WebMath (Polu & Sutskever, 2020) for 72B tokens. We use the standard BPE encoding (Brown et al., 2020), a batch size of 512 and a learning rate of 0.00025 with a cosine schedule and a 100-step ramp-up.

We use an 80-5-15 train-validation-test split. We split all datapoints deterministically by *theorem name*, by hashing each name to a float in  $(0, 1)$ . This ensures, for example, that proof steps used to prove a test theorem never appear in the training data and vice-versa.

For fine-tuning a model, we load saved parameters but re-initialize the optimizer. We start each training for a fixed number of tokens (defining the cosine schedule) and record the number of tokens consumed as we reach a minimal validation loss. We use the minimum validation loss snapshot to evaluate each model on our held-out test set.

We partition our datasets into three groups:

1. `tactic`: the dataset described in Section 3.1.
2. `mix1`: the union of the PACT tasks **next lemma prediction** and **proof term prediction** (Section 3.2), selected because of their close relation to `tactic`.
3. `mix2`: all other datasets described in Section 3.2.

This grouping is motivated by the impossibility to ablate each dataset separately given our compute budget. They nonetheless enable us to study the effect of tasks that are very close to the `tactic` objective in comparison to others. Our choice of **next lemma prediction** and **proof term prediction** for `mix1` is motivated by the observation that these tasks are closely related to the theorem proving objective: a proof can be given entirely in terms of a sequence of lemmas to apply (as in Metamath), or the proof can be finished in one step by supplying the entire proof term.

Despite their logical similarity to the `PROOFSTEP` objective, we nevertheless use different keywords in the prompt to the model to disambiguate (`NEXTLEMMA` and `PROOFTERM`) from (`PROOFSTEP`) because the data is noisy and represents a significant distribution shift: during pretty-printing, subtrees of proof terms beyond a certain

---

depth are dropped entirely, there is generally no guarantee that they can be re-parsed, and the data is much more verbose than what humans typically supply in source code.

## 4.2. Theorem proving evaluation

We run theorem-proving evaluations on our held-out `test` set, comprising 3071 theorems. Since the split was conducted by theorem name, the proofs of these theorems never appear in the training data. For each theorem in the test set, we set the runtime environment to the location where the theorem is proved in the source code, preventing the use of theorems defined later in `mathlib` and ensuring that we never derive circular proofs. We run the proof search algorithm using either the `tidy` or the `gptf` backend. In all of our experiments, we use a maximum width of  $w_{\max} = 16$ , a maximum depth of  $d_{\max} = 128$ , a maximum budget of 512 iterations of the outer loop, a timeout of 5 seconds per tactic execution, and a global timeout of 600 seconds per theorem. Because sampling candidates from our models over the OpenAI API is much slower ( $\approx 1$  second) than querying the constant `baseline` oracle (instantaneous), the `baseline` proof search runs through many more rounds of proof search than `gptf` before timeout.

We report the percentage of theorems proved from the held-out test set. As these evaluations are noisy, we average over three evaluation runs when reporting the pass rate (*i.e.* percentage of theorems proved).

## 4.3. Effect of co-training vs pre-training

The main focus of our experiments consists in comparing the effects of pre-training and co-training with the `mix1` and `mix2` datasets. We pre-train using the methodology described above (potentially sequentially pre-training twice, first on `WebMath`, and then on a `PACT` dataset). When co-training we simply concatenate and shuffle the datasets together without applying any particular weight to a given dataset.

The main results are presented in Figure 5. Pre-training exhibits an effective transfer from `mix-1` and/or `mix-2` but the best result is achieved by co-training with both these datasets. With this setup, we are able to train for much longer (71B tokens vs 22B+18B for the best pre-training setup) before overfitting on the `PROOFSTEP` task. We hypothesize that `PACT` regularizes overfitting to the `PROOFSTEP` task while still imparting useful knowledge to the model due to large amounts of mutual information between all tasks, and that this is the main driver of increased performance.

## 4.4. Ablation of `WebMath` pre-training

We trained models without the initial `WebMath` pre-training step. As expected, co-trained models suffer from this ablation but we were more interested in measuring the effect on pre-trained models on `mix-1` and `mix-2`, as they may not benefit from `WebMath` as much due to the two successive pre-training steps.

We report the min validation losses in Figure 6 (we plan to report evaluation pass-rates as well in a later version of this paper). `WebMath` appears as substantially beneficial even in the sequential pre-training setup. This indicates that `PACT` is not a replacement for `WebMath` pre-training, but rather a complementary method for enhancing the performance of language models for theorem proving.

We speculate that in the presence of `WebMath` pre-training, features emerging from `mix-1/mix-2` pre-training steps may be of higher quality, leading to a more effective transfer to the downstream `PROOFSTEP` objective.

## 4.5. Effect of model size

Finally we study the effect of model sizes. The setup used is the best setup reported in Figure 5, `WebMath > mix1 + mix2 + tactic`. The 837M model is our main model. The 163M and 121M models respectively have 12 and 6 layers, with  $d_{\text{model}} = 768$ . The learning rates are respectively adjusted to 0.0014 and 0.0016.

As demonstrated by Figure 7, performance is highly correlated with model size, with larger models generally achieving better generalization even in the overfitted regime. We leave as future work a careful study of how evaluation performance is affected when scaling to multi-billion parameter models, as well as the feasibility of deploying them for interactive use by Lean users.

## 4.6. `future-mathlib` evaluation

In the 5 week period that separated our last dataset extraction and the writing of this paper, `mathlib` grew by 30K lines of code, adding 2807 new theorems. Evaluating our models on these new theorem statements gives a unique way to assess their capability to assist humans in formalizing proofs and to test their generalization to completely unseen theorems and definitions. This evaluation set also addresses one of the weaknesses of using a random split of theorems from a formal mathematics library, namely that the split is non-chronological; *e.g.* test theorems can appear as lemmas in proofs of train theorems.

We call this temporally held-out test set `future-mathlib` and evaluate our best model as well as the `refl` and `tidy-bfs` baselines on it. In contrast to evaluation on our `test` split, the `refl` baseline

tactic	
<b>tactic proof steps</b>	GOAL <TacticState> PROOFSTEP <Tactic>
mix1	
<b>next lemma prediction</b>	GOAL <TacticState> NEXTLEMMA apply (<NextLemma>)
<b>proof term prediction</b>	GOAL <TacticState> PROOFTERM exact (<ProofTerm>)
mix2	
<b>skip proof</b>	RESULT <MaskedProofTerm> SKIPPROOF <ProofTerm>
<b>type prediction</b>	RESULT <MaskedProofTerm> PREDICTTYPE <Type>
<b>tactic state elaboration</b>	GOAL <TacticState> ELABGOAL <ElaboratedTacticState>
<b>proof term elaboration</b>	PROOFTERM <ProofTerm> ELABPROOFTERM <ElaboratedProofTerm>
<b>premise classification</b>	GOAL <TacticState> CLASSIFYPREMISE <Premise> <True False>
<b>local context classification</b>	GOAL <TacticState> CLASSIFYLOCALS <LocalsList>
<b>theorem naming</b>	TYPE <Type> NAME <Name>

Figure 4. Auto-regressive objectives used for each task described in Section 3. Placeholders represented with brackets (such as <TacticState>) are substituted by the context-completion pairs from each datasets in the prompts above. Each task is presented to the model with its respective keyword (PROOFSTEP, NEXTLEMMA,...). We wrap the completions of mix1 tasks (with apply(...) and exact(...)) respectively as a hint that they are related to the respective Lean tactics; this is not directly possible for the other tasks.

Model	Tokens total	Early-stop	mix1	mix2	tactic	Pass-rate
<i>Baselines</i>						
refl						1.1%
tidy-bfs						9.9%
WebMath > tactic	32B	1B			1.02	32.2%
<i>Pre-training</i>						
WebMath > mix1	32B	11B	0.08			
WebMath > mix2	32B	16B		0.08		
WebMath > mix1 + mix2	32B	22B	0.11	0.08		
WebMath > mix1 > tactic	32B	1B			1.00	39.8%
WebMath > mix1 + mix2 > tactic	32B	1B			0.97	44.0%
<i>Co-training (PACT)</i>						
WebMath > mix1 + tactic	32B	18B	0.08		0.94	40.0%
WebMath > mix1 + mix2 + tactic	96B	71B	0.09	0.09	<b>0.91</b>	<b>48.4%</b>
<i>Pre-training and co-training</i>						
WebMath > mix2 > mix1 + tactic	32B	18B	0.08		0.93	46.9%

Figure 5. Comparison of pre-training and co-training on mix-1 and mix-2. > denotes a pre-training step and + denotes a co-training. As an example, WebMath > mix2 > mix1 + tactic signifies a model successively pre-trained on WebMath then mix2 and finally co-trained as a fine-tuning step on mix1 and tactic. Columns mix1, mix2, tactic report the min validation loss achieved on these respective datasets.

Model	Tokens total	Early-stop	mix1	mix2	tactic
<i>Baselines</i>					
tactic	32B	1B			1.59
<i>Pre-training</i>					
mix1	32B	20B	0.12		
mix2	32B	25B		0.10	
mix1 + mix2	32B	27B	0.13	0.10	
mix1 > tactic	32B	1B			1.26
mix1 + mix2 > tactic	32B	1B			1.16
<i>Co-training</i>					
mix1 + tactic	32B	27B	0.11		1.12
mix1 + mix2 + tactic	96B	71B	0.10	0.11	<b>1.07</b>
<i>Pre-training and co-training</i>					
mix2 > mix1 + tactic	32B	26B	0.11		1.09

Figure 6. Validation losses achieved in the pre-training and co-training setups without WebMath pre-training. See Figure 5 for a description of the columns and the models nomenclature used.

Model	Tokens total	Early-stop	mix1	mix2	tactic	Pass-rate
121M	96B	82B	0.13	0.10	1.23	35.1%
163M	96B	80B	0.12	0.09	1.11	39.8%
837M	96B	71B	0.09	0.09	<b>0.91</b>	<b>48.4%</b>

Figure 7. Validation losses and pass-rates achieved for various model sizes using PACT. See Figure 5 for a description of the columns. The setup used is WebMath > mix1 + mix2 + tactic.

---

(simply attempting a proof by the `refl` tactic) closes 328 proofs (11.6%), demonstrating an important skew towards trivial boilerplate lemmas generally defined to provide alternate interfaces to new definitions. The `tidy-bfs` baseline closed 611 proofs (21.8%), and our best model `wm-tt-m1-m2` closed 1043 proofs (37.1%), proving 94% of the `refl` lemmas.

We attribute the weaker performance to heavy distribution shift: by the nature of the dataset, the `future-mathlib` theorems frequently involve new definitions and concepts which the model was never exposed to during training. Nevertheless, the success rate remains high enough to suggest strong generalization and usefulness at the frontier of formalized mathematics.

## 5. Discussion

**Chained tactic predictions** In Lean, multiple tactic commands can be chained together using semicolons. Our data pipeline treats these tactic chains as a single sequence in our training data, and they are occasionally predicted by the model. Such chained tactic applications are difficult for human formalizers to synthesize on their own, as they require reasoning about the semantics of multiple tactics in sequence and their effects on the tactic state, and the examples present in the training data are usually optimized by hand from longer, less succinct proofs. We observed that PACT significantly boosts the capability of our models to *successfully* predict longer chained tactic applications. This occurs in spite of the fact that this tactic chaining idiom is specific to the tactic proofstep dataset and does not appear in the PACT training data whatsoever. We supply more detail in the appendix.

**Impact on Lean community** Lean’s `mathlib` is one of the most active open-source software projects in the world, achieving explosive growth in recent years (`mathlib`, 2020). Our work has been welcomed by members of this community, with Lean power users describing some of the new proofs found by GPT-f as “nontrivial” and “clever”. More than one-third of the proofs found by our models are shorter and produce smaller proof terms (sometimes by several orders of magnitude) than the ground truth. Manually inspecting a portion of these shorter proofs has led to 36 GPT-f co-authored commits to `mathlib`, some of which reduce proof term sizes and theorem compilation times by an order of magnitude. We supply more detail in the appendix.

**Lean GPT-f interactive frontend** We have released a simplified version of the proof search described in Section 3.3 as a tactic called `gpt f` to the Lean community in a public beta, opening the way for our models to directly accelerate the development of formalized mathematics and for

human experts to provide feedback and additional training signal in a virtuous cycle.

**Future directions** There are many elaborations on the training data, training methodology, and tree search wrapping `lean-gpt f` which can be reasonably expected to improve its performance at theorem proving. Our dataset can be synthetically augmented using similar methods as (Polu & Sutskever, 2020). Merely making the decoded rewrites robust by only using the largest prefix of successful rewrites significantly boosts the success rate of suggested rewrites. In a similar vein, predicted lemmas generated as arguments to unsuccessful tactic applications could be cached and re-used as hints for an intermittently-queried hammer. The increased success rate of chained tactic predictions mentioned above shows the feasibility of having language models perform multiple reasoning steps in a single query, potentially improving the efficiency of the proof search. From the experiments described in Section 4, it is clear that the composition of the dataset used for co-training significantly affects performance on theorem proving. Although we uniformly sampled across all co-training tasks, it would be interesting to optimize a dynamic mixture schedule, perhaps annealing towards a desired task.

**Conclusion** There is a sense in which PACT is merely an application of the well known principle that compute in the form of search should be exchanged for training signal whenever possible. In Lean, typeclass inference relies on a backtracking Prolog-style search; the elaborator performs search to disambiguate overloaded notation and infer types; Lean tactics have complex semantics precisely because they can perform search to find subproofs automatically. The work done by these subroutines is preserved in the proof artifacts, and PACT can be viewed as a way of extracting this information offline for more training signal.

We have presented PACT as a way of addressing the data scarcity issue for learning theorem proving from human tactic scripts in proof assistant libraries. Another well-studied solution for this is expert iteration and reinforcement learning. In the setting of HOL Light, and under the assumption of a hardcoded finite action space of tactics, DeepHOLZero in conjunction with supervised seed data was able to achieve up to 70% proof success rate on the HOList theorem proving task. Similarly, in a set-up much closer to ours, MM GPT-f demonstrated the feasibility of expert iteration when using generative language models for theorem proving.

Within a fixed corpus of theorems (and hence proof terms), however, both PACT and RL are fundamentally constrained by a lack of exploration—as the performance of the theorem proving agent improves, it will eventually saturate and become starved for data, and its curriculum will need to be expanded. Although self-supervised methods such as

---

PACT represent a way to significantly improve the data-efficiency of reinforcement learning loops over existing theorem prover libraries, the development of continuously self-improving and infinitely scalable neural theorem provers remains contingent on sufficiently powerful exploration and automated curriculum generation; we consider these challenges to be of paramount importance.

## Acknowledgements

We thank the members of the Lean community, in particular Kevin Buzzard, Simon Hudon, Johan Commelin, Mario Carneiro, Bhavik Mehta, and Gabriel Ebner for their valuable feedback on our work. We are indebted to Markus Rabe and Christian Szegedy for many hours of helpful discussion. We also thank Daniel Selsam, Tom Hales, and Josef Urban for feedback on earlier drafts of this paper.

## References

- Alama, J., Heskes, T., Kühlwein, D., Tsvitshivadze, E., and Urban, J. Premise selection for mathematics by corpus analysis and kernel methods. *J. Autom. Reason.*, 52(2): 191–213, 2014. doi: 10.1007/s10817-013-9286-5.
- Bansal, K., Loos, S. M., Rabe, M. N., and Szegedy, C. Learning to reason in large theories without imitation. *CoRR*, abs/1905.10501, 2019a. URL <http://arxiv.org/abs/1905.10501>.
- Bansal, K., Loos, S. M., Rabe, M. N., Szegedy, C., and Wilcox, S. Holist: An environment for machine learning of higher order logic theorem proving. In Chaudhuri, K. and Salakhutdinov, R. (eds.), *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, volume 97 of *Proceedings of Machine Learning Research*, pp. 454–463. PMLR, 2019b. URL <http://proceedings.mlr.press/v97/bansal19a.html>.
- Blaauwbroek, L., Urban, J., and Geuvers, H. The tactician - A seamless, interactive tactic learner and prover for coq. In Benzmüller, C. and Miller, B. R. (eds.), *Intelligent Computer Mathematics - 13th International Conference, CICM 2020, Bertinoro, Italy, July 26-31, 2020, Proceedings*, volume 12236 of *Lecture Notes in Computer Science*, pp. 271–277. Springer, 2020. doi: 10.1007/978-3-030-53518-6\_17. URL [https://doi.org/10.1007/978-3-030-53518-6\\_17](https://doi.org/10.1007/978-3-030-53518-6_17).
- Blanchette, J. C., Kaliszyk, C., Paulson, L. C., and Urban, J. Hammering towards QED. *J. Formaliz. Reason.*, 9(1):101–148, 2016. doi: 10.6092/issn.1972-5787/4593. URL <https://doi.org/10.6092/issn.1972-5787/4593>.
- Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T., Child, R., Ramesh, A., Ziegler, D. M., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., and Amodei, D. Language models are few-shot learners. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H. (eds.), *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/1457c0d6bfc4967418bfb8ac142f64a-Abstract.html>.
- Buzzard, K., Hughes, C., Lau, K., Livingston, A., Mir, R. F., and Morrison, S. Schemes in lean. *arXiv preprint arXiv:2101.02602*, 2019.
- Buzzard, K., Commelin, J., and Massot, P. Formalising perfectoid spaces. In Blanchette, J. and Hritcu, C. (eds.), *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, CPP 2020, New Orleans, LA, USA, January 20-21, 2020*, pp. 299–312. ACM, 2020. doi: 10.1145/3372885.3373830. URL <https://doi.org/10.1145/3372885.3373830>.
- Carmon, Y., Raghunathan, A., Schmidt, L., Duchi, J. C., and Liang, P. Unlabeled data improves adversarial robustness. In Wallach, H. M., Larochelle, H., Beygelzimer, A., d’Alché-Buc, F., Fox, E. B., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 11190–11201, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/32e0bd1497aa43e02a42f47d9d6515ad-Abstract.html>.
- Charton, F., Hayat, A., and Lample, G. Deep differential system stability - learning advanced computations from examples. *CoRR*, abs/2006.06462, 2020. URL <https://arxiv.org/abs/2006.06462>.
- Chen, T., Liu, S., Chang, S., Cheng, Y., Amini, L., and Wang, Z. Adversarial robustness: From self-supervised pre-training to fine-tuning. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2020, Seattle, WA, USA, June 13-19, 2020*, pp. 696–705. IEEE, 2020. doi: 10.1109/CVPR42600.2020.00078. URL <https://doi.org/10.1109/CVPR42600.2020.00078>.

- 
- Conneau, A. and Lample, G. Cross-lingual language model pretraining. In Wallach, H. M., Larochelle, H., Beygelzimer, A., d'Alché-Buc, F., Fox, E. B., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 7057–7067, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/c04c19c2c2474dbf5f7ac4372c5b9af1-Abstract.html>.
- Cummins, C., Fisches, Z. V., Ben-Nun, T., Hoefler, T., and Leather, H. Programl: Graph-based deep learning for program optimization and analysis. *CoRR*, abs/2003.10536, 2020. URL <https://arxiv.org/abs/2003.10536>.
- de Moura, L. M., Kong, S., Avigad, J., van Doorn, F., and von Raumer, J. The Lean Theorem Prover (system description). In Felty, A. P. and Middeldorp, A. (eds.), *Automated Deduction - CADE-25 - 25th International Conference on Automated Deduction, Berlin, Germany, August 1-7, 2015, Proceedings*, volume 9195 of *Lecture Notes in Computer Science*, pp. 378–388. Springer, 2015. doi: 10.1007/978-3-319-21401-6\_26. URL [https://doi.org/10.1007/978-3-319-21401-6\\_26](https://doi.org/10.1007/978-3-319-21401-6_26).
- Devlin, J., Chang, M., Lee, K., and Toutanova, K. BERT: pre-training of deep bidirectional transformers for language understanding. In Burstein, J., Doran, C., and Solorio, T. (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pp. 4171–4186. Association for Computational Linguistics, 2019. doi: 10.18653/v1/n19-1423. URL <https://doi.org/10.18653/v1/n19-1423>.
- Doersch, C., Gupta, A., and Efros, A. A. Unsupervised visual representation learning by context prediction. In *2015 IEEE International Conference on Computer Vision, ICCV 2015, Santiago, Chile, December 7-13, 2015*, pp. 1422–1430. IEEE Computer Society, 2015. doi: 10.1109/ICCV.2015.167. URL <https://doi.org/10.1109/ICCV.2015.167>.
- Dong, L., Yang, N., Wang, W., Wei, F., Liu, X., Wang, Y., Gao, J., Zhou, M., and Hon, H. Unified language model pre-training for natural language understanding and generation. In Wallach, H. M., Larochelle, H., Beygelzimer, A., d'Alché-Buc, F., Fox, E. B., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 13042–13054, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/c20bb2d9a50d5ac1f713f8b34d9aac5a-Abstract.html>.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., Uszkoreit, J., and Houlsby, N. An image is worth 16x16 words: Transformers for image recognition at scale. *CoRR*, abs/2010.11929, 2020. URL <https://arxiv.org/abs/2010.11929>.
- Ebner, G., Ullrich, S., Roesch, J., Avigad, J., and de Moura, L. A metaprogramming framework for formal verification. *Proc. ACM Program. Lang.*, 1(ICFP):34:1–34:29, 2017. doi: 10.1145/3110278. URL <https://doi.org/10.1145/3110278>.
- Evans, R., Saxton, D., Amos, D., Kohli, P., and Grefenstette, E. Can neural networks understand logical entailment? In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018. URL <https://openreview.net/forum?id=SkZxCk-0Z>.
- Finkbeiner, B., Hahn, C., Rabe, M. N., and Schmitt, F. Teaching temporal logics to neural networks. *CoRR*, abs/2003.04218, 2020. URL <https://arxiv.org/abs/2003.04218>.
- Ganesalingam, M. and Gowers, W. T. A fully automatic theorem prover with human-style output. *J. Autom. Reason.*, 58(2):253–291, 2017. doi: 10.1007/s10817-016-9377-1. URL <https://doi.org/10.1007/s10817-016-9377-1>.
- Gauthier, T., Kaliszyk, C., Urban, J., Kumar, R., and Norrish, M. Learning to prove with tactics. *CoRR*, abs/1804.00596, 2018. URL <http://arxiv.org/abs/1804.00596>.
- Gidaris, S., Singh, P., and Komodakis, N. Unsupervised representation learning by predicting image rotations. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018. URL <https://openreview.net/forum?id=S1v4N2l0->.
- Han, J. M. and van Doorn, F. A formal proof of the independence of the continuum hypothesis. In Blanchette, J. and Hritcu, C. (eds.), *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, CPP 2020, New Orleans, LA, USA, January 20-21, 2020*, pp. 353–366. ACM, 2020. doi: 10.

- 
- 1145/3372885.3373826. URL <https://doi.org/10.1145/3372885.3373826>.
- Hendrycks, D., Mazeika, M., Kadavath, S., and Song, D. Using self-supervised learning can improve model robustness and uncertainty. In Wallach, H. M., Larochelle, H., Beygelzimer, A., d'Alché-Buc, F., Fox, E. B., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pp. 15637–15648, 2019. URL <https://proceedings.neurips.cc/paper/2019/hash/a2b15837edac15df90721968986f7f8e-Abstract.html>.
- Henighan, T., Kaplan, J., Katz, M., Chen, M., Hesse, C., Jackson, J., Jun, H., Brown, T. B., Dhariwal, P., Gray, S., Hallacy, C., Mann, B., Radford, A., Ramesh, A., Ryder, N., Ziegler, D. M., Schulman, J., Amodei, D., and McCandlish, S. Scaling laws for autoregressive generative modeling. *CoRR*, abs/2010.14701, 2020. URL <https://arxiv.org/abs/2010.14701>.
- Huang, D., Dhariwal, P., Song, D., and Sutskever, I. Gamepad: A learning environment for theorem proving. *CoRR*, abs/1806.00608, 2018. URL <http://arxiv.org/abs/1806.00608>.
- Irving, G., Szegedy, C., Alemi, A. A., Eén, N., Chollet, F., and Urban, J. DeepMath—deep sequence models for premise selection. In *Advances in Neural Information Processing Systems*, pp. 2235–2243, 2016.
- Jaderberg, M., Mnih, V., Czarnecki, W. M., Schaul, T., Leibo, J. Z., Silver, D., and Kavukcuoglu, K. Reinforcement learning with unsupervised auxiliary tasks. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=SJ6yPD5xg>.
- Jakubův, J. and Urban, J. ENIGMA: efficient learning-based inference guiding machine. In Geuvers, H., England, M., Hasan, O., Rabe, F., and Teschke, O. (eds.), *Intelligent Computer Mathematics - 10th International Conference, CICM 2017, Edinburgh, UK, July 17-21, 2017, Proceedings*, volume 10383 of *Lecture Notes in Computer Science*, pp. 292–302. Springer, 2017. doi: 10.1007/978-3-319-62075-6\_20. URL [https://doi.org/10.1007/978-3-319-62075-6\\_20](https://doi.org/10.1007/978-3-319-62075-6_20).
- Jakubův, J. and Urban, J. Hammering Mizar by learning clause guidance. *arXiv preprint arXiv:1904.01677*, 2019.
- Jang, E., Devin, C., Vanhoucke, V., and Levine, S. Grasp2vec: Learning object representations from self-supervised grasping. In *2nd Annual Conference on Robot Learning, CoRL 2018, Zürich, Switzerland, 29-31 October 2018, Proceedings*, volume 87 of *Proceedings of Machine Learning Research*, pp. 99–112. PMLR, 2018. URL <http://proceedings.mlr.press/v87/jang18a.html>.
- Kaliszyk, C. and Urban, J. Femalecop: Fairly efficient machine learning connection prover. In Davis, M., Fehnker, A., McIver, A., and Voronkov, A. (eds.), *Logic for Programming, Artificial Intelligence, and Reasoning - 20th International Conference, LPAR-20 2015, Suva, Fiji, November 24-28, 2015, Proceedings*, volume 9450 of *Lecture Notes in Computer Science*, pp. 88–96. Springer, 2015a. doi: 10.1007/978-3-662-48899-7\_7. URL [https://doi.org/10.1007/978-3-662-48899-7\\_7](https://doi.org/10.1007/978-3-662-48899-7_7).
- Kaliszyk, C. and Urban, J. Mizar 40 for mizar 40. *J. Autom. Reason.*, 55(3):245–256, 2015b. doi: 10.1007/s10817-015-9330-8. URL <https://doi.org/10.1007/s10817-015-9330-8>.
- Kaliszyk, C. and Urban, J. Learning-assisted theorem proving with millions of lemmas. *J. Symb. Comput.*, 69:109–128, 2015c. doi: 10.1016/j.jsc.2014.09.032. URL <https://doi.org/10.1016/j.jsc.2014.09.032>.
- Kaliszyk, C., Urban, J., and Vyskocil, J. Lemmatization for stronger reasoning in large theories. In Lutz, C. and Ranise, S. (eds.), *Frontiers of Combining Systems - 10th International Symposium, FroCoS 2015, Wrocław, Poland, September 21-24, 2015. Proceedings*, volume 9322 of *Lecture Notes in Computer Science*, pp. 341–356. Springer, 2015. doi: 10.1007/978-3-319-24246-0\_21. URL [https://doi.org/10.1007/978-3-319-24246-0\\_21](https://doi.org/10.1007/978-3-319-24246-0_21).
- Kaliszyk, C., Chollet, F., and Szegedy, C. Holstep: A machine learning dataset for higher-order logic theorem proving. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=ryuxYmvel>.
- Kaliszyk, C., Urban, J., Michalewski, H., and Olsák, M. Reinforcement learning of theorem proving. In Bengio, S., Wallach, H. M., Larochelle, H., Grauman, K., Cesa-Bianchi, N., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 31: Annual Conference on Neural Information Processing Systems 2018, NeurIPS 2018, December 3-8, 2018, Montréal, Canada*,

- pp. 8836–8847, 2018. URL <https://proceedings.neurips.cc/paper/2018/hash/55acff8539596d25624059980986aaa78-Abstract.html>.
- Kaplan, J., McCandlish, S., Henighan, T., Brown, T. B., Chess, B., Child, R., Gray, S., Radford, A., Wu, J., and Amodei, D. Scaling laws for neural language models. *CoRR*, abs/2001.08361, 2020. URL <https://arxiv.org/abs/2001.08361>.
- Lample, G. and Charton, F. Deep learning for symbolic mathematics. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net, 2020. URL <https://openreview.net/forum?id=S1eZYeHFDS>.
- Laskin, M., Srinivas, A., and Abbeel, P. CURL: contrastive unsupervised representations for reinforcement learning. In *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, volume 119 of *Proceedings of Machine Learning Research*, pp. 5639–5650. PMLR, 2020. URL <http://proceedings.mlr.press/v119/laskin20a.html>.
- Lederman, G., Rabe, M. N., Seshia, S., and Lee, E. A. Learning heuristics for quantified boolean formulas through reinforcement learning. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net, 2020. URL <https://openreview.net/forum?id=BJluxREKDB>.
- Li, W., Yu, L., Wu, Y., and Paulson, L. C. Isarstep: a benchmark for high-level mathematical reasoning. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=Pzj6fzU6wkj>.
- Logeswaran, L. and Lee, H. An efficient framework for learning sentence representations. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018. URL <https://openreview.net/forum?id=rJvJXZb0W>.
- mathlib. The lean mathematical library. In Blanchette, J. and Hritcu, C. (eds.), *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, CPP 2020, New Orleans, LA, USA, January 20-21, 2020*, pp. 367–381. ACM, 2020. doi: 10.1145/3372885.3373824. URL <https://doi.org/10.1145/3372885.3373824>.
- Nie, P., Palmkog, K., Li, J. J., and Gligoric, M. Deep generation of coq lemma names using elaborated terms. In Peltier, N. and Sofronie-Stokkermans, V. (eds.), *Automated Reasoning - 10th International Joint Conference, IJCAR 2020, Paris, France, July 1-4, 2020, Proceedings, Part II*, volume 12167 of *Lecture Notes in Computer Science*, pp. 97–118. Springer, 2020. doi: 10.1007/978-3-030-51054-1\_6. URL [https://doi.org/10.1007/978-3-030-51054-1\\_6](https://doi.org/10.1007/978-3-030-51054-1_6).
- Noroozi, M. and Favaro, P. Unsupervised learning of visual representations by solving jigsaw puzzles. In Leibe, B., Matas, J., Sebe, N., and Welling, M. (eds.), *Computer Vision - ECCV 2016 - 14th European Conference, Amsterdam, The Netherlands, October 11-14, 2016, Proceedings, Part VI*, volume 9910 of *Lecture Notes in Computer Science*, pp. 69–84. Springer, 2016. doi: 10.1007/978-3-319-46466-4\_5. URL [https://doi.org/10.1007/978-3-319-46466-4\\_5](https://doi.org/10.1007/978-3-319-46466-4_5).
- Ott, M., Edunov, S., Baevski, A., Fan, A., Gross, S., Ng, N., Grangier, D., and Auli, M. fairseq: A fast, extensible toolkit for sequence modeling. In Ammar, W., Louis, A., and Mostafazadeh, N. (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Demonstrations*, pp. 48–53. Association for Computational Linguistics, 2019. doi: 10.18653/v1/n19-4009. URL <https://doi.org/10.18653/v1/n19-4009>.
- Paliwal, A., Loos, S. M., Rabe, M. N., Bansal, K., and Szegedy, C. Graph representations for higher-order logic and theorem proving. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pp. 2967–2974. AAAI Press, 2020. URL <https://aaai.org/ojs/index.php/AAAI/article/view/5689>.
- Pathak, D., Krähenbühl, P., Donahue, J., Darrell, T., and Efros, A. A. Context encoders: Feature learning by inpainting. In *2016 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2016, Las Vegas, NV, USA, June 27-30, 2016*, pp. 2536–2544. IEEE Computer Society, 2016. doi: 10.1109/CVPR.2016.278. URL <https://doi.org/10.1109/CVPR.2016.278>.
- Pfenning, F. and Paulin-Mohring, C. Inductively defined types in the calculus of constructions. In Main, M. G., Melton, A., Mislove, M. W., and Schmidt, D. A. (eds.), *Mathematical Foundations of Programming Semantics, 5th International Conference, Tulane Univer-*

- 
- sity, New Orleans, Louisiana, USA, March 29 - April 1, 1989, *Proceedings*, volume 442 of *Lecture Notes in Computer Science*, pp. 209–228. Springer, 1989. doi: 10.1007/BFb0040259. URL <https://doi.org/10.1007/BFb0040259>.
- Polu, S. and Sutskever, I. Generative language modeling for automated theorem proving. *CoRR*, abs/2009.03393, 2020. URL <https://arxiv.org/abs/2009.03393>.
- Rabe, M. N., Lee, D., Bansal, K., and Szegedy, C. Mathematical reasoning via self-supervised skip-tree training. *CoRR*, abs/2006.04757, 2020. URL <https://arxiv.org/abs/2006.04757>.
- Radford, A., Kim, J. W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., Sastry, G., Askell, A., Mishkin, P., Clark, J., et al. Learning Transferable Visual Models From Natural Language Supervision.
- Radford, A., Narasimhan, K., Salimans, T., and Sutskever, I. Improving language understanding by generative pre-training. URL [https://s3-us-west-2.amazonaws.com/openai-assets/researchcovers/languageunsupervised/language\\_understanding\\_paper.pdf](https://s3-us-west-2.amazonaws.com/openai-assets/researchcovers/languageunsupervised/language_understanding_paper.pdf), 2018.
- Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., and Liu, P. J. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21:140:1–140:67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.
- Rocktäschel, T. and Riedel, S. End-to-end differentiable proving. In Guyon, I., von Luxburg, U., Bengio, S., Wallach, H. M., Fergus, R., Vishwanathan, S. V. N., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pp. 3788–3800, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/b2ab001909a8a6f04b51920306046ce5-Abstract.html>.
- Sanchez-Stern, A., Alhessi, Y., Saul, L. K., and Lerner, S. Generating correctness proofs with neural networks. In Sen, K. and Naik, M. (eds.), *Proceedings of the 4th ACM SIGPLAN International Workshop on Machine Learning and Programming Languages, MAPL@PLDI 2020, London, UK, June 15, 2020*, pp. 1–10. ACM, 2020. doi: 10.1145/3394450.3397466. URL <https://doi.org/10.1145/3394450.3397466>.
- Scholze, P. Liquid tensor experiment. <https://xenaproject.wordpress.com/2020/12/05/liquid-tensor-experiment/>, 2020. Formalization available at <https://github.com/leanprover-community/lean-liquid>.
- Selsam, D., Lamm, M., Bünz, B., Liang, P., de Moura, L., and Dill, D. L. Learning a SAT solver from single-bit supervision. In *7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019*. URL [https://openreview.net/forum?id=HJMC\\_iA5tm](https://openreview.net/forum?id=HJMC_iA5tm).
- Selsam, D., Han, J. M., de Moura, L., and Godefroid, P. Universal policies for software-defined mdps. *CoRR*, abs/2012.11401, 2020. URL <https://arxiv.org/abs/2012.11401>.
- Song, K., Tan, X., Qin, T., Lu, J., and Liu, T. MASS: masked sequence to sequence pre-training for language generation. In Chaudhuri, K. and Salakhutdinov, R. (eds.), *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, volume 97 of *Proceedings of Machine Learning Research*, pp. 5926–5936. PMLR, 2019. URL <http://proceedings.mlr.press/v97/song19d.html>.
- Urban, J. MPTP - motivation, implementation, first experiments. *J. Autom. Reason.*, 33(3-4):319–339, 2004. doi: 10.1007/s10817-004-6245-1. URL <https://doi.org/10.1007/s10817-004-6245-1>.
- Urban, J. and Jakubuv, J. First neural conjecturing datasets and experiments. In Benz Müller, C. and Miller, B. R. (eds.), *Intelligent Computer Mathematics - 13th International Conference, CICM 2020, Bertinoro, Italy, July 26-31, 2020, Proceedings*, volume 12236 of *Lecture Notes in Computer Science*, pp. 315–323. Springer, 2020. doi: 10.1007/978-3-030-53518-6\_24. URL [https://doi.org/10.1007/978-3-030-53518-6\\_24](https://doi.org/10.1007/978-3-030-53518-6_24).
- Urban, J., Vyskocil, J., and Stepánek, P. Malecop machine learning connection prover. In Brünner, K. and Metcalfe, G. (eds.), *Automated Reasoning with Analytic Tableaux and Related Methods - 20th International Conference, TABLEUX 2011, Bern, Switzerland, July 4-8, 2011. Proceedings*, volume 6793 of *Lecture Notes in Computer Science*, pp. 263–277. Springer, 2011. doi: 10.1007/978-3-642-22119-4\_21. URL [https://doi.org/10.1007/978-3-642-22119-4\\_21](https://doi.org/10.1007/978-3-642-22119-4_21).
- van den Oord, A., Li, Y., and Vinyals, O. Representation learning with contrastive predictive coding. *CoRR*, abs/1807.03748, 2018. URL <http://arxiv.org/abs/1807.03748>.

Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. Attention is all you need. In Guyon, I., von Luxburg, U., Bengio, S., Wallach, H. M., Fergus, R., Vishwanathan, S. V. N., and Garnett, R. (eds.), *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pp. 5998–6008, 2017. URL <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>.

Vincent, P., Larochelle, H., Bengio, Y., and Manzagol, P. Extracting and composing robust features with denoising autoencoders. In Cohen, W. W., McCallum, A., and Roweis, S. T. (eds.), *Machine Learning, Proceedings of the Twenty-Fifth International Conference (ICML 2008), Helsinki, Finland, June 5-9, 2008*, volume 307 of *ACM International Conference Proceeding Series*, pp. 1096–1103. ACM, 2008. doi: 10.1145/1390156.1390294. URL <https://doi.org/10.1145/1390156.1390294>.

Wang, M. and Deng, J. Learning to prove theorems by learning to generate theorems. In Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., and Lin, H. (eds.), *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/d2a27e83d429f0dcae6b937cf440aeb1-Abstract.html>.

Whalen, D. Holophrasm: a neural automated theorem prover for higher-order logic. *CoRR*, abs/1608.02644, 2016. URL <http://arxiv.org/abs/1608.02644>.

Wiedijk, F. The De Bruijn factor, 2000. URL <http://www.cs.ru.nl/F.Wiedijk/factor/factor.pdf>.

Wu, Y., Rabe, M. N., Li, W., Ba, J., Grosse, R. B., and Szegedy, C. LIME: learning inductive bias for primitives of mathematical reasoning. *CoRR*, abs/2101.06223, 2021. URL <https://arxiv.org/abs/2101.06223>.

Yang, K. and Deng, J. Learning to prove theorems via interacting with proof assistants. In Chaudhuri, K. and Salakhutdinov, R. (eds.), *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, volume 97 of *Proceedings of Machine Learning Research*, pp. 6984–6994. PMLR, 2019. URL <http://proceedings.mlr.press/v97/yang19a.html>.

## A. Datasets

### Pre-training datasets

We pre-train on WebMath as described in (Polu & Sutskever, 2020). WebMath pre-trained models are also pre-trained on the mix used by GPT-3 (Brown et al., 2020) which includes a filtered CommonCrawl, WebText2, Book1, Book2 and Wikipedia. WebMath includes Python-only GitHub data, as well as arXiv and Math StackExchange.

From these datasets, a potential risk for test-set contamination (presence of `mathlib`) exists for the crawled datasets, namely CommonCrawl, WebText2, and (in case of a filtering bug) Python-only GitHub. The other datasets (in particular arXiv and Math StackExchange) may contain short references of `mathlib` code but in shape and forms that would not lead to effective contamination.

To assess the contamination risk related with the crawled datasets, we run full-scans searching for the following `mathlib`-specific strings on CommonCrawl, WebText2, and Python-only GitHub. Note that we expect these strings to match even if presented in HTML on the Web as these datasets contain text rendered versions of the page crawled online.

```
{ rintro ("
{ rcases h"
"irrational_sqrt_two : irrational (sqrt 2)"
```

Despite the two first strings occurring respectively 266 and 101 times in `mathlib`, we found 0 occurrence of any of the three strings in WebText2, Python-only GitHub, or CommonCrawl; negating any suspicion of effective test-set contamination.

At the same time we looked for the following Metamath specific and HOL specific strings:

```
Metamath:
" ( ph -> A = C )"
" ( ph -> A R C )"
" ( sqrt ` 2 ) e/ QQ"
HOL:
"apply (rule "
"apply (drule "
```

We found 0 occurrence of the Metamath-related strings but interestingly found a non-negligible amount of HOL-related documents, which does not constitute a test-set contamination but potentially benefits the downstream tasks studied in this paper.

### Dataset sizes

- `tactic`:  $\approx 128\text{K}$  examples.
- `mix1`

- **Next lemma prediction:**  $\approx 2.5M$  examples
- **Proof term prediction:**  $\approx 2.9M$  examples
- mix2
  - **Skip-proof:**  $\approx 1.7M$  examples
  - **Type-prediction:**  $\approx 1.7M$  examples
  - **Tactic state elaboration:**  $\approx 346K$  examples
  - **Proof term elaboration:**  $\approx 1.0M$  examples
  - **Premise classification:**  $\approx 9.3M$  examples
  - **Local context classification:**  $\approx 2.0M$  examples
  - **Theorem naming:**  $\approx 32K$  examples.

## Example datapoints

We present datapoints extracted from a toy example, namely the proof of the Peirce identity, viz.

```
lemma peirce_identity {P Q : Prop} : ((P →
  Q) → P) → P :=
begin
  apply or.elim (em P),
  intros h _,
  exact h,
  tauto!
end
```

From this, we can extract four tactic datapoints (i.e. human-generated tactic proof steps):

```
-- GOAL P Q : Prop ⊢ ((P → Q) → P) → P
PROOFSTEP apply or.elim (em P)
-- GOAL P Q : Prop ⊢ P → ((P → Q) → P) →
P P Q : Prop ⊢ ¬P → ((P → Q) → P)
→ P PROOFSTEP intros h _
-- GOAL P Q : Prop, h : P, α̃ : (P → Q) →
P ⊢ P P Q : Prop ⊢ ¬P → ((P → Q) →
P) → P PROOFSTEP exact h
-- GOAL P Q : Prop ⊢ ¬P → ((P → Q) → P)
→ P PROOFSTEP tauto!
```

In contrast, we can extract dozens of raw PACT datapoints. Due to space constraints, we list a representative sample of four such datapoints, from each of which we can derive the nine self-supervised auxiliary PACT tasks studied in our present work. For example, proof term prediction is precisely predicting the "proof\_term" given the concatenation of "hyps", "⊢", and the "goal", skip-proof is predicting the "proof\_term" given "result", etc.

```
DATAPOINT:
---
{ "decl_nm": "peirce_identity",
  "decl_tp": "∀ {P Q : Prop}, ((P → Q) →
    P) → P",
  "hyps": [{"P", "Prop"}, {"Q", "Prop"},
    [{"α̃", "¬P"}, [{"α̃_1", "(P → Q) → P"},
    [{"α̃_1", "¬(P → Q)"}]],
  "hyps_mask": [true, false, false, false,
    false],
```

```
"decl_premises": [{"absurd", "∀ {a b :
  Prop}, a → ¬a → b"},
  ["absurd", "∀ {a b : Prop}, a → ¬a →
  b"],
  ["decidable.not_imp", "∀ {a b : Prop}
  [_inst_1 : decidable a], ¬(a → b) ↔ a
  ∧ ¬b"],
  ["iff.mp", "∀ {a b : Prop}, (a ↔ b) →
  a → b"],
  ["and.dcases_on",
  "∀ {a b : Prop} {C : a ∧ b → Prop} (n
  : a ∧ b), (∀ (left : a) (right : b), C
  _) → C n"],
  ["decidable.not_or_of_imp", "∀ {a b :
  Prop} [_inst_1 : decidable a], (a → b)
  → ¬a ∨ b"],
  ["or.dcases_on",
  "∀ {a b : Prop} {C : a ∨ b → Prop} (n
  : a ∨ b), (∀ (h : a), C _) → (∀ (h :
  b), C _) → C n"],
  ["em", "∀ (p : Prop), p ∨ ¬p"],
  ["or.elim", "∀ {a b c : Prop}, a ∨ b →
  (a → c) → (b → c) → c"]],
"decl_premises_mask": [false, false,
  true, false, false, false, false,
  false, false],
"goal": "∀ {b : Prop} [_inst_1 :
  decidable P], ¬(P → b) ↔ P ∧ ¬b",
"proof_term": "decidable.not_imp",
"result": "λ {P Q : Prop}, (em P).elim (λ
  (h : P) (α̃ : (P → Q) → P), h) (λ (α̃ :
  ¬P) (α̃_1 : (P → Q) → P),
  (decidable.not_or_of_imp α̃
  _1).dcases_on (λ (α̃_1 : ¬(P → Q)),
  ((PREDICT Q (classical.prop_decidable
  P)).mp α̃_1).dcases_on (λ (α̃_1_left :
  P) (α̃_1_right : ¬Q), absurd α̃_1_left α̃
  )) (λ (α̃_1 : P), absurd α̃_1 α̃))",
"next_lemma": ["decidable.not_imp", "∀ {a
  b : Prop} [_inst_1 : decidable a], ¬(a
  → b) ↔ a ∧ ¬b"],
"goal_is_prop": true,
"verbose_proof_term": "@decidable.not_imp
P",
"verbose_goal": "∀ {b : Prop} [_inst_1 :
  decidable P], ¬(P → b) ↔ P ∧ ¬b",
"verbose_result": "λ {P Q : Prop}, (em
  P).elim (λ (h : P) (α̃ : (P → Q) → P),
  h) (λ (α̃ : ¬P) (α̃_1 : (P → Q) → P),
  (@decidable.not_or_of_imp (P → Q) P
  (classical.prop_decidable (P → Q)) α̃
  _1).dcases_on (λ (α̃_1 : ¬(P → Q)),
  (@iff.mp (¬(P → Q)) (P ∧ ¬Q) (PREDICT
  Q (classical.prop_decidable P)) α̃
  _1).dcases_on (λ (α̃_1_left : P)
  (α̃_1_right : ¬Q), @absurd P P α̃_1_left
  α̃)) (λ (α̃_1 : P), @absurd P P α̃_1 α̃))"}
```

```
DATAPOINT:
---
{ "decl_nm": "peirce_identity",
  "decl_tp": "∀ {P Q : Prop}, ((P → Q) →
    P) → P",
  "hyps": [{"P", "Prop"}, {"Q", "Prop"},
```

```

["α", "¬P"], ["α_1", "(P → Q) → P"],
["α_1", "¬(P → Q)"]],
"hyps_mask":[false, true, false, false,
false],
"decl_premises":["absurd", "∀ {a b :
Prop}, a → ¬a → b"],
["absurd", "∀ {a b : Prop}, a → ¬a →
b"],
["decidable.not_imp", "∀ {a b : Prop}
[_inst_1 : decidable a], ¬(a → b) ↔ a
∧ ¬b"],
["iff.mp", "∀ {a b : Prop}, (a ↔ b) →
a → b"],
["and.dcases_on",
"∀ {a b : Prop} {C : a ∧ b → Prop} (n
: a ∧ b), (∀ (left : a) (right : b), C
_) → C n"],
["decidable.not_or_of_imp", "∀ {a b :
Prop} [_inst_1 : decidable a], (a → b)
→ ¬a ∨ b"],
["or.dcases_on",
"∀ {a b : Prop} {C : a ∨ b → Prop} (n
: a ∨ b), (∀ (h : a), C _) → (∀ (h :
b), C _) → C n"],
["em", "∀ (p : Prop), p ∨ ¬p"],
["or.elim", "∀ {a b c : Prop}, a ∨ b →
(a → c) → (b → c) → c"]],
"decl_premises_mask":[false, false,
false, false, false, false,
false, false],
"goal":"Prop",
"proof_term":"Q",
"result":"λ {P Q : Prop}, (em P).elim (λ
(h : P) (α : (P → Q) → P), h) (λ (α :
¬P) (α_1 : (P → Q) → P),
(decidable.not_or_of_imp α
_1).dcases_on (λ (α_1 : ¬(P → Q)),
(decidable.not_imp.mp α_1).dcases_on
(λ (α_1_left : P) (α_1_right : ¬Q),
absurd α_1_left α)) (λ (α_1 : P),
absurd α_1 α))",
"next_lemma":["Q", "Prop"],
"goal_is_prop":false,
"verbose_proof_term":"Q",
"verbose_goal":"Prop",
"verbose_result":"λ {P Q : Prop}, (em
P).elim (λ (h : P) (α : (P → Q) → P),
h) (λ (α : ¬P) (α_1 : (P → Q) → P),
(@decidable.not_or_of_imp (P → Q) P
(classical.prop_decidable (P → Q)) α
_1).dcases_on (λ (α_1 : ¬(P → Q)),
(@decidable.not_imp P PREDICT
(classical.prop_decidable P)).mp α
_1).dcases_on (λ (α_1_left : P)
(α_1_right : ¬Q), @absurd P P α_1_left
α)) (λ (α_1 : P), @absurd P P α_1 α))"
---
DATAPOINT:
---
{ "decl_nm":"peirce_identity",
"decl_tp":"∀ {P Q : Prop}, ((P → Q) →
P) → P",
"hyps":["P", "Prop"], ["Q", "Prop"],
["α", "¬P"], ["α_1", "(P → Q) → P"],

```

```

["α_1", "¬(P → Q)"]],
"hyps_mask":[true, true, false, false,
false],
"decl_premises":["absurd", "∀ {a b :
Prop}, a → ¬a → b"],
["absurd", "∀ {a b : Prop}, a → ¬a →
b"],
["decidable.not_imp", "∀ {a b : Prop}
[_inst_1 : decidable a], ¬(a → b) ↔ a
∧ ¬b"],
["iff.mp", "∀ {a b : Prop}, (a ↔ b) →
a → b"],
["and.dcases_on",
"∀ {a b : Prop} {C : a ∧ b → Prop} (n
: a ∧ b), (∀ (left : a) (right : b), C
_) → C n"],
["decidable.not_or_of_imp", "∀ {a b :
Prop} [_inst_1 : decidable a], (a → b)
→ ¬a ∨ b"],
["or.dcases_on",
"∀ {a b : Prop} {C : a ∨ b → Prop} (n
: a ∨ b), (∀ (h : a), C _) → (∀ (h :
b), C _) → C n"],
["em", "∀ (p : Prop), p ∨ ¬p"],
["or.elim", "∀ {a b c : Prop}, a ∨ b →
(a → c) → (b → c) → c"]],
"decl_premises_mask":[false, false,
true, false, false, false,
false, false],
"goal":"∀ [_inst_1 : decidable P], ¬(P →
Q) ↔ P ∧ ¬Q",
"proof_term":"decidable.not_imp",
"result":"λ {P Q : Prop}, (em P).elim (λ
(h : P) (α : (P → Q) → P), h) (λ (α :
¬P) (α_1 : (P → Q) → P),
(decidable.not_or_of_imp α
_1).dcases_on (λ (α_1 : ¬(P → Q)),
((PREDICT (classical.prop_decidable
P)).mp α_1).dcases_on (λ (α_1_left :
P) (α_1_right : ¬Q), absurd α_1_left α
)) (λ (α_1 : P), absurd α_1 α))",
"next_lemma":["decidable.not_imp", "∀ {a
b : Prop} [_inst_1 : decidable a], ¬(a
→ b) ↔ a ∧ ¬b"],
"goal_is_prop":true,
"verbose_proof_term":"@decidable.not_imp
P Q",
"verbose_goal":"∀ [_inst_1 : decidable
P], ¬(P → Q) ↔ P ∧ ¬Q",
"verbose_result":"λ {P Q : Prop}, (em
P).elim (λ (h : P) (α : (P → Q) → P),
h) (λ (α : ¬P) (α_1 : (P → Q) → P),
(@decidable.not_or_of_imp (P → Q) P
(classical.prop_decidable (P → Q)) α
_1).dcases_on (λ (α_1 : ¬(P → Q)),
(@iff.mp (¬(P → Q)) (P ∧ ¬Q) (PREDICT
(classical.prop_decidable P)) α
_1).dcases_on (λ (α_1_left : P)
(α_1_right : ¬Q), @absurd P P α_1_left
α)) (λ (α_1 : P), @absurd P P α_1 α))"
---
DATAPOINT:
---
{ "decl_nm":"peirce_identity",

```

```

"decl_tp": "∀ {P Q : Prop}, ((P → Q) → P) → P",
"hyp": [{"P", "Prop"}, {"Q", "Prop"}, {"α", "¬P"}, {"α_1", "(P → Q) → P"}, {"α_1", "¬(P → Q)"}],
"hyp_mask": [false, false, false, false, false],
"decl_premises": [{"absurd", "∀ {a b : Prop}, a → ¬a → b"}, {"absurd", "∀ {a b : Prop}, a → ¬a → b"}, {"decidable.not_imp", "∀ {a b : Prop} [_inst_1 : decidable a], ¬(a → b) ↔ a ∧ ¬b"}, {"iff.mp", "∀ {a b : Prop}, (a ↔ b) → a → b"}, {"and.dcases_on", "∀ {a b : Prop} {C : a ∧ b → Prop} (n : a ∧ b), (∀ (left : a) (right : b), C _) → C n"}, {"decidable.not_or_of_imp", "∀ {a b : Prop} [_inst_1 : decidable a], (a → b) → ¬a ∨ b"}, {"or.dcases_on", "∀ {a b : Prop} {C : a ∨ b → Prop} (n : a ∨ b), (∀ (h : a), C _) → (∀ (h : b), C _) → C n"}, {"em", "∀ (p : Prop), p ∨ ¬p"}, {"or.elim", "∀ {a b c : Prop}, a ∨ b → (a → c) → (b → c) → c"}],
"decl_premises_mask": [false, false, false, false, false, false, false, false],
"goal": "∏ (a : Prop), decidable a",
"proof_term": "classical.prop_decidable",
"result": "λ {P Q : Prop}, (em P).elim (λ (h : P) (α : (P → Q) → P), h) (λ (α : ¬P) (α_1 : (P → Q) → P), (decidable.not_or_of_imp α _1).dcases_on (λ (α_1 : ¬(P → Q)), (decidable.not_imp.mp α_1).dcases_on (λ (α_1_left : P) (α_1_right : ¬Q), absurd α_1_left α)) (λ (α_1 : P), absurd α_1 α))",

"next_lemma": ["classical.prop_decidable", "∏ (a : Prop), decidable a"],
"goal_is_prop": false,

"verbose_proof_term": "classical.prop_decidable",
"verbose_goal": "∏ (a : Prop), decidable a",
"verbose_result": "λ {P Q : Prop}, (em P).elim (λ (h : P) (α : (P → Q) → P), h) (λ (α : ¬P) (α_1 : (P → Q) → P), (@decidable.not_or_of_imp (P → Q) P (PREDICT (P → Q)) α_1).dcases_on (λ (α_1 : ¬(P → Q)), (@decidable.not_imp P Q (PREDICT P)).mp α_1).dcases_on (λ (α_1_left : P) (α_1_right : ¬Q), @absurd P P α_1_left α)) (λ (α_1 : P), @absurd P P α_1 α))"

```

Table 1. Counting the number of semicolon-chained tactics predicted by our models that appear in successful proofs. Each column headed by a number  $n$ ; indicates the number of times that a suggestion appeared with  $n$  occurrences of ‘;’.

MODEL	1;	2;	3;	4;	MEAN
wm-to-tt	215	49	2	0	1.199
wm-to-tt-m1	186	39	5	1	1.225
wm-to-tt-m1-m2	<b>328</b>	<b>82</b>	<b>12</b>	<b>3</b>	<b>1.271</b>

## B. Experiments

### Chained tactic prediction

Individual Lean tactics are chained together with commas. However, the Lean interactive tactic DSL also includes a number of other tactic combinators for creating composite tactics. A frequently used combinator is the infix semicolon `t; s` which will perform the tactic `t` and then apply the tactic `s` to each of the resulting subgoals produced by `t`. Our data pipeline for human tactic proof steps treats these semicolon-chained tactics as a single string for the language modeling objective. Thus, our models learn to occasionally emit multiple-step tactic predictions using semicolons. For example, `wm-to-tt-m1-m2` solved the following lemma in category theory with a single prediction chaining four tactics in a row:

```

theorem
  category_theory.grothendieck.congr
  {X Y : grothendieck F} {f g : X → Y}
  (h : f = g) :
  f.fiber = eq_to_hom (by subst h) >>
  g.fiber :=
begin
  rcases X; rcases Y; subst h; simp
end

```

One way of measuring the sophistication of predicted tactics is to consider the number of successful proofs on the evaluation set which have this composite form using semicolon-chaining. We display this analysis in Table 1, which shows that training with PACT in addition to the human-made tactics causes longer semicolon-chained tactics to be successfully predicted during theorem proving. This is remarkable because the semicolon idiom is specific to the tactic DSL which does not occur in the PACT data whatsoever, and yet the co-training causes longer and more frequent successful composite tactic predictions.

### Theorem naming case study

We included *theorem naming* as part of the PACT task suite. By `mathlib` convention, theorem names are essentially snake-cased, natural language summaries of the type signa-

---

### Correct top-1 guesses

---

**Theorem statement**

```
∀ {α : Type u_1} {β : Type u_2} [_inst_1 : decidable_eq α]
  [_inst_2 : decidable_eq β] (s : finset α) (t : finset β),
s.product t = s.bUnion
(λ (a : α), finset.image (λ (b : β), (a, b)) t)
```

**Ground truth**

finset.product\_eq\_bUnion

---

**Theorem statement**

```
∀ {α : Type u_1} {β : Type u_2} [_inst_1 : topological_space α]
  [_inst_2 : topological_space β] {f : α → β},
quotient_map f → function.surjective f
```

**Ground truth**

quotient\_map.surjective

---

**Theorem statement**

```
∀ {α : Type u_1} {β : Type u_2} (f : α → option β)
(x : option α), x.pbind (λ (a : α) (_x : a ∈ x), f a) = x.bind f
```

**Ground truth**

option.pbind\_eq\_bind

---

**Theorem statement**

```
∀ {C : Type u_1} [_inst_1 : category_theory.category C]
  {G : C ⇒ C} [_inst_2 : category_theory.comonad G]
  {A B : category_theory.comonad.coalgebra G} (h : A.A ≅ B.A)
  (w : A.a ≫ G.map h.hom = h.hom ≫ B.a),
(category_theory.comonad.coalgebra.iso_mk h w).hom.f = h.hom
```

**Ground truth**

category\_theory.comonad.coalgebra.iso\_mk\_hom\_f

---

**Theorem statement**

```
∀ {k : Type u_1} {E : Type u_2} [_inst_1 : is_R_or_C ,k]
  [_inst_2 : inner_product_space k E]
  [_inst_4 : normed_space ℝ E] [_inst_5 : is_scalar_tower ℝ k E]
(p x : E × E),
↑(fderiv_inner_clm p) x =
  has_inner.inner p.fst x.snd + has_inner.inner x.fst p.snd
```

**Ground truth**

fderiv\_inner\_clm\_apply

---

Figure 8. A sample of correct top-1 guesses by our best model `wm-to-tt-m1-m2` on the *theorem naming* task. We performed this experiment on the `future-mathlib` evaluation set, which comprises entirely unseen theorems added to `mathlib` only after we last extracted training data.

---

### Incorrect guesses

---

<b>Theorem statement</b>	$\forall \{\alpha : \text{Type } u_1\} (t : \text{ordnode } \alpha) (x : \alpha),$ $t.\text{dual}.\text{find\_min}' x = \text{ordnode}.\text{find\_max}' x t$
<b>Guesses (top 8)</b>	$\text{ordinal}.\text{find\_min}'_{\text{eq}}, \text{ordinal}.\text{find\_min}'_{\text{eq\_max}'}, \text{ordinal}.\text{find\_min}'_{\text{def}},$ $\text{ordinal}.\text{find\_min}'_{\text{eq\_max}}, \text{ordinal}.\text{find\_min}', \text{ordinal}.\text{dual\_find\_min}',$ $\text{ordinal}.\text{find\_min}'_{\text{gt}}, \text{ordinal}.\text{find\_min}'_{\text{q}}$
<b>Ground truth</b>	$\text{ordnode}.\text{find\_min}'_{\text{dual}}$
<hr/>	
<b>Theorem statement</b>	$\forall \{\alpha : \text{Type } u_1\} \{\beta : \text{Type } u_3\} \{\gamma : \text{Type } u_5\} [_{\text{inst}_1} :$ $\text{measurable\_space } \alpha] [_{\text{inst}_3} : \text{measurable\_space } \beta]$ $[_{\text{inst}_5} : \text{measurable\_space } \gamma] \{\mu : \text{measure\_theory}.\text{measure } \alpha\}$ $\{\nu : \text{measure\_theory}.\text{measure } \beta\}$ $[_{\text{inst}_8} : \text{measure\_theory}.\text{sigma\_finite } \nu]$ $\{f : \alpha \times \beta \rightarrow \gamma\},$ $\text{ae\_measurable } f (\mu.\text{prod } \nu) \rightarrow (\forall^m (x : \alpha) \partial\mu,$ $\text{ae\_measurable } (\lambda (y : \beta), f (x, y)) \nu)$
<b>Guesses (top 8)</b>	$\text{measure\_theory}.\text{ae\_prod}, \text{measure\_theory}.\text{ae\_of\_ae\_prod},$ $\text{measure\_theory}.\text{ae\_eq\_prod\_of\_ae}, \text{measure\_theory}.\text{ae\_ae\_of\_ae\_prod},$ $\text{measure\_theory}.\text{ae\_measure\_prod\_mk\_left},$ $\text{measure\_theory}.\text{ae\_prod\_of\_ae\_prod},$ $\text{measure\_theory}.\text{ae\_measure\_prod}, \text{measure\_theory}.\text{ae\_eq\_refl}$
<b>Ground truth</b>	$\text{ae\_measurable}.\text{prod\_mk\_left}$
<hr/>	
<b>Theorem statement</b>	$\forall \{\alpha : \text{Type } u_1\} \{\beta : \text{Type } u_2\} \{\gamma : \text{Type } u_3\}$ $\{f : \text{filter } \alpha\} \{h : \text{set } \alpha \rightarrow \text{set } \beta\} \{m : \gamma \rightarrow \beta\}$ $\{l : \text{filter } \gamma\}, \text{filter}.\text{tendsto } m l (f.\text{lift}' h) \leftrightarrow$ $\forall (s : \text{set } \alpha), s \in f \rightarrow (\forall^f (a : \gamma) \text{ in } l, m a \in h s)$
<b>Guesses (top 8)</b>	$\text{filter}.\text{tendsto\_lift}'_{\text{iff}}, \text{filter}.\text{tendsto\_lift}'_{\text{def}}$
<b>Ground truth</b>	$\text{filter}.\text{tendsto\_lift}'$
<hr/>	
<b>Theorem statement</b>	$\forall \{R : \text{Type}\} [_{\text{inst}_1} : \text{comm\_ring } R]$ $\{d : \mathbb{Z}\} (f : \mathbb{Z}\sqrt{d} \rightarrow^+ R),$ $\uparrow(\uparrow(\text{zsqrtd}.\text{lift}.\text{symm}) f) = \uparrow f \text{zsqrtd}.\text{sqrtd}$
<b>Guesses (top 8)</b>	$\text{zsqrtd}.\text{coe\_lift\_symm}, \text{zsqrtd}.\text{coe\_lift}.\text{symm}, \text{zsqrtd}.\text{lift}.\text{coe\_symm\_apply},$ $\text{zsqrtd}.\text{lift\_symm\_apply}, \text{zsqrtd}.\text{lift}.\text{coe\_coe\_symm}, \text{zsqrtd}.\text{lift}.\text{coe\_symm\_coe},$ $\text{zsqrtd}.\text{lift}.\text{symm\_coe\_zsqrtd}, \text{zsqrtd}.\text{lift\_symm\_to\_zsqrtd}$
<b>Ground truth</b>	$\text{zsqrtd}.\text{lift\_symm\_apply\_coe}$

---

Figure 9. A sample of incorrect guesses by our best model `wm-to-tt-m1-m2` on the *theorem naming* task. We performed this experiment on the `future-mathlib` evaluation set, which comprises entirely unseen theorems added to `mathlib` only after we last extracted training data. Most of the top-8 guesses displayed in the above table are very similar to the ground truth, in some cases being equivalent up to permutation of underscore-separated tokens. Note that for the first example, the concept of `ordnode` was not in the training data whatsoever and all predictions are in the syntactically similar `ordinal` namespace.

ture of a theorem, and so the theorem naming task is analogous to a formal-to-informal translation task. We evaluate the ability of our best model (in terms of theorem proving success rate) `wm-to-tt-m1-m2` on its ability to guess theorem names on the completely unseen `future-mathlib` set of theorems. The distribution shift inherent in the `future-mathlib` dataset particularly impacts the theorem naming task, because many of the ground-truth names will involve names for concepts that were only defined in `mathlib` after we extracted our training data.

On the  $\approx 2.8\text{K}$  `future-mathlib` theorems, we queried `wm-to-tt-m1-m2` for up to  $N = 16$  candidates. We order these candidates into a list `xs` by decreasing cumulative log-probability and calculate the top- $K$  accuracy by checking if any of the first  $K$  candidates of `xs` match the ground truth exactly. The model `wm-to-tt-m1-m2` was able to achieve 20.1% top-1 accuracy, 21.1% top-3 accuracy, 26.7% top-10 accuracy, and 30.0% top-16 accuracy. We display a sample of correct top-1 guesses (Figure 8) and a sample of failed guesses in (Figure 9). We note that the failed guesses, while containing no syntactic matches, are both semantically reasonable and syntactically very similar to the ground truth.

### Test set evaluation breakdown by module

Lean’s `mathlib` is organized into top-level modules, which roughly organize theorems into mathematical subject area. In Figure 10, we break down the evaluation results on our `test` set between our PACT-trained models `wm-to-tt-m1-m2` and `wm-to-tt-m1` and our baselines `wm-to-tt` and `tidy`. We see that full PACT mostly dominates over co-training on just the `mix1` tasks over all subject areas, and that `wm-to-tt-m1` dominates the model `wm-to-tt` trained on human tactic proof steps only.

### Baseline description

The `tidy` backend is determined by a constant oracle

```
 $\Omega$  : tactic_state  $\rightarrow$  list (string  $\times$  float)
```

which always returns the same list of tactics, namely:

```
meta def tidy_default_tactics : list
  (string  $\times$  float) :=
list.map (flip prod.mk 0.0) [
  "refl"
, "exact dec_trivial"
, "assumption"
, "tactic.intros1"
, "tactic.auto_cases"
, "apply_auto_param"
, "dsimp at *"
, "simp at *"
, "ext1"
, "fsplit"
, "injections_and_clear"
```

```
, "solve_by_elim"
, "norm_cast"
]
```

Unlike the `gptf` backend, which generates a list of candidates in parallel independently, `tidy` enjoys the advantage that the list of tactics it emits is carefully chosen and ordered in order to optimize the proof search—this is based on the “waterfall” technique of the human-style automated theorem prover described in ((Ganesalingam & Gowers, 2017)).

### Computational resource estimates

For each evaluation loop over the `test` set, we distributed the theorems over a pool of 32 CPU workers whose inference requests were load-balanced over 4 V100 GPUs. Each evaluation required  $\approx 10$  hours with  $\approx 30\%$  GPU utilization. We observed that our evaluation was bottlenecked by inference and in practice, we hosted up to three evaluation loops at once on a VM with 80 logical cores without achieving full CPU utilization. In addition to the wall-clock timeout of 600s, we also limited the proof search to a logical timeout of 512 iterations, where one iteration corresponds to a single expansion of a node of the BFS search tree. In practice, so much time was spent either blocked on inference or performing the tactic executions in the inner loop of each iteration that we rarely exceeded the logical timeout, usually exceeding the wall-clock timeout instead.

Fine-tuning on our largest dataset `mix1 + mix2 + tactic` required 26 hours using 64 A100 GPUs exhibiting high FP16 usage, totalling an estimated  $\approx 1.5\text{K}$  A100 (FP16) -hours. This gives an estimated cost of 17.33 A100 (FP16) -hours per billion elapsed tokens during training. We note that when calculating the number of elapsed tokens for training, we overestimate the actual number of tokens effectively trained on by summing full context windows (in this case, 2048 tokens).

## C. Example proofs

Lean’s `mathlib` is one of the most active open-source software projects in the world. More than one-third of the proofs found by our models are shorter and produce smaller proof terms than the ground truth, leading to dozens of GPT-f co-authored commits to `mathlib`. We examine some of the proofs found by our models in more detail.

### `lie_algebra.morphism.map_bot_iff`

This proof produces a proof term which is 4X smaller than the original:

```
lemma map_bot_iff : I.map f =  $\perp$   $\leftrightarrow$  I  $\leq$ 
  f.ker :=
by { rw  $\leftarrow$  le_bot_iff, apply
  lie_ideal.map_le_iff_le_comap }
```

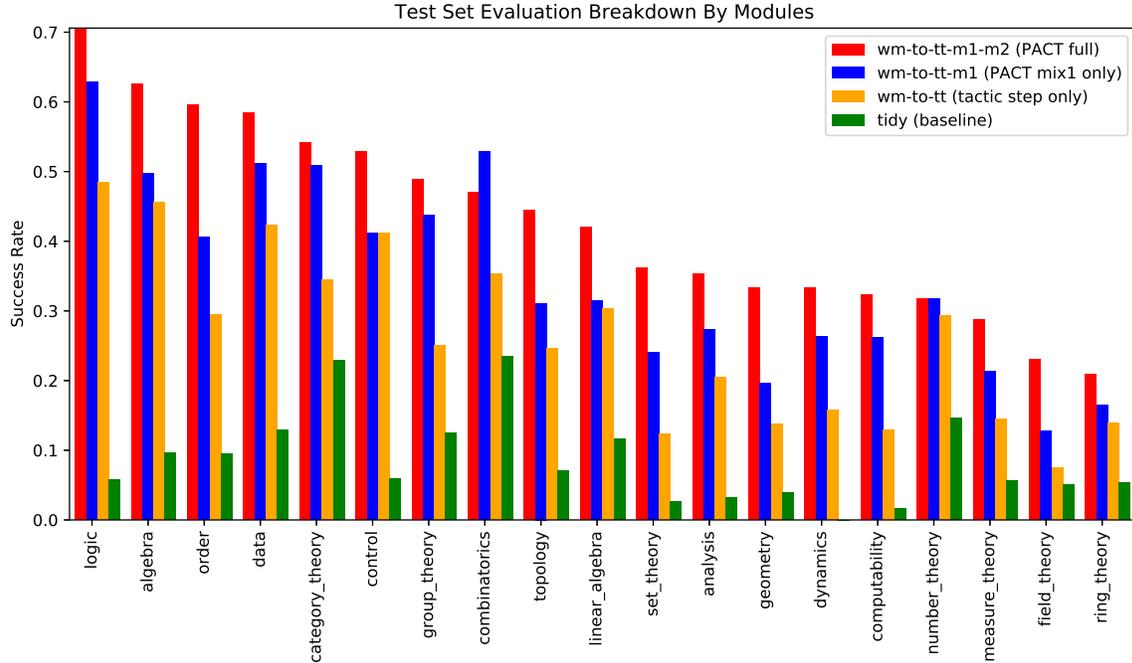


Figure 10. A breakdown of theorem proving success rate on the test set for `wm-to-tt-m1-m2`, `wm-to-tt-m1`, `wm-to-tt`, and the `tidy` baseline across top-level modules in Lean’s `mathlib`. We see that `wm-to-tt-m1-m2` mostly dominates `wm-to-tt-m1` and the models trained using PACT dominate the model `wm-to-tt` trained on human tactic proof steps.

The original, human-written proof is much longer, viz.

```
lemma map_bot_iff : I.map f = ⊥ ↔ I ≤
  f.ker :=
begin
  rw le_ker_iff, unfold lie_ideal.map,
  split; intros h,
  { rwa [eq_bot_iff,
    lie_submodule.lie_span_le,
    set.image_subset_iff,
    lie_submodule.bot_coe] at h, },
  { suffices : f " I = ↑(⊥ : lie_ideal R
    L'), { rw [this,
    lie_submodule.lie_span_eq], },
    ext x, rw [lie_submodule.bot_coe,
    set.mem_singleton_iff, set.mem_image],
    split,
    { rintros ⟨y, hy, hx⟩, rw ← hx, exact h
      y hy, },
    { intros hx, use 0, simp [hx], }, },
end
```

### `primrec.of_equiv`

This proof produces a proof term which is 12X smaller than the original:

```
theorem of_equiv {β} {e : β ≈ α} :
  by haveI := primcodable.of_equiv α e;
  exact
  primrec e :=
```

```
by letI : primcodable β :=
  primcodable.of_equiv α e; exact
  encode_iff.1 primrec.encode
```

The author of the original proof and maintainer of that package commented:

`encode_iff.1 primrec.encode` is clever, it’s a way to translate `primrec` across an equivalence when the `encode` function is defined as `encode x = encode (e x)` where `e` is the isomorphism.

As far as they knew, this trick was never used before in the `computability` package.

### `real.tan_eq_sin_div_cos`

This proof demonstrates our model’s library knowledge and ability at premise selection.

```
lemma real.tan_eq_sin_div_cos (x : ℝ) :
  tan x = sin x / cos x :=
begin
  rw ← of_real_inj,
  simp only [complex.tan_eq_sin_div_cos,
    of_real_sin, of_real_cos, of_real_div,
    of_real_tan]
end
```

Our model was able to predict this entire list of simp lemmas in one shot. Note that the lemma `complex.tan_eq_sin_div_cos` in this list is the *complex number* version of the result, i.e.  $\forall (x : \mathbb{C}), \tan x = \sin x / \cos x$ . The previous human-written version of the proof did not use the more general version of the lemma on complex numbers, demonstrating our model’s ability to find more general cases of lemmas. We contrast this with the human-written ground truth, which is more complex and performs a case analysis using the complex cosine:

```
lemma tan_eq_sin_div_cos : tan x = sin x
  / cos x :=
if h : complex.cos x = 0 then by simp
  [sin, cos, tan, *, complex.tan,
  div_eq_mul_inv] at *
else
  by rw [sin, cos, tan, complex.tan, ←
    of_real_inj, div_eq_mul_inv, mul_re];
  simp [norm_sq, (div_div_eq_div_mul _ _
    _).symm, div_self h]; refl
```

### **sym2.is\_diag\_iff\_proj\_eq**

The proof of this lemma is longer than the ground truth and was not contributed to `mathlib`, but we describe it here because the proof is original and includes a nontrivial instantiation of an existential quantifier.

```
theorem sym2.is_diag_iff_proj_eq (z :  $\alpha \times \alpha$ ) :
  is_diag [z]  $\leftrightarrow$  z.1 = z.2 :=
begin
  intros,
  simp only [is_diag, prod.ext_iff,
  quot.exists_rep, iff_true, not_true,
  eq_self_iff_true],
  simp [diag], split,
  { rintros ⟨y, hy⟩, cases hy; refl },
  intro h, cases z, existsi z_snd,
  cases h, refl,
end
```

Before `existsi z_snd`, the goal state is

```
zfst z_snd:  $\alpha$ 
h: (zfst, z_snd).fst = (zfst, z_snd).snd
 $\vdash \exists (y : \alpha), (y, y) \approx (zfst, z_snd)$ 
```

This goal state never appeared in `mathlib`.

### **norm\_le\_zero\_iff**

The following proof is remarkable because it uses fewer tactic steps and takes a different route to the proof than the ground truth, uses a complex idiom `simp` [...] `using @...`, and was predicted in one shot.

```
lemma norm_le_zero_iff { $\alpha$  : Type u_1}
  [_inst_1 : normed_group  $\alpha$ ]
```

```
{g :  $\alpha$ } : ||g|| ≤ 0  $\leftrightarrow$  g = 0 :=
by { simp [le_antisymm_iff, norm_nonneg]
  using @norm_eq_zero  $\alpha$  _ g }
-- ground truth:
-- by { rw [dist_zero_right],
--       exact dist_le_zero }
```

The lemmas supplied between the square brackets are used to simplify the main goal. The lemma supplied after the keyword `using` can further simplify the lemmas supplied between the square brackets. The `@` modifier makes all arguments explicit. The string `@norm_eq_zero` never appeared in our training data but the prediction includes the correct number of correctly typed arguments, and even replaces the second argument with a placeholder `_`, correctly guessing that it can be inferred by the elaborator. Finally, this again showcases the strength of our models as premise selectors: all three lemmas `le_antisymm_iff`, `norm_nonneg`, and `norm_eq_zero` were not used in the human-supplied proof but are necessary for this proof.

Moving forward, we hope that our neural theorem provers will continue to find ways to improve `mathlib` and assist in creating new proofs. More generally, we hope neural theorem proving will one day become a routine part of the formalization workflow.

## **D. Source code**

Our source code will be made available at the following repositories:

### **Lean theorem proving environment :**

<https://www.github.com/jesse-michael-han/lean-tpe-public>

### **Tactic step data pipeline :**

<https://www.github.com/jasonrute/lean-proof-recording-public>

### **PACT data pipeline :**

<https://www.github.com/jesse-michael-han/lean-step-public>