

Do Adversarially Robust ImageNet Models Transfer Better?

Hadi Salman*
hadi.salman@microsoft.com
Microsoft Research

Andrew Ilyas*
ailyas@mit.edu
MIT

Logan Engstrom
engstrom@mit.edu
MIT

Ashish Kapoor
akapoor@microsoft.com
Microsoft Research

Aleksander Mądry
madry@mit.edu
MIT

Abstract

Transfer learning is a widely-used paradigm in which models pre-trained on standard datasets can efficiently adapt to downstream tasks. Typically, better pre-trained models yield better transfer results, suggesting that initial accuracy is a key aspect of transfer learning performance. In this work, we identify another such aspect: we find that adversarially robust models, while less accurate, often perform better than their standard-trained counterparts when used for transfer learning. Specifically, we focus on adversarially robust ImageNet classifiers, and show that they yield improved accuracy on a standard suite of downstream classification tasks. Further analysis uncovers more differences between robust and standard models in the context of transfer learning. Our results are consistent with (and in fact, add to) recent hypotheses stating that robustness leads to improved feature representations. Our code and models are available at <https://github.com/Microsoft/robust-models-transfer>.

1 Introduction

Deep neural networks currently define state-of-the-art performance across many computer vision tasks. When large quantities of labeled data and computing resources are available, models perform well when trained from scratch. However, in many practical settings there is insufficient data or compute for this approach to be viable. In these cases, *transfer learning* [DJV+14; SAS+14] has emerged as a simple and efficient way to obtain performant models. Broadly, transfer learning refers to any machine learning algorithm that leverages information from one (“source”) task to better solve another (“target”) task. A prototypical transfer learning pipeline in computer vision (and the focus of our work) starts with a model trained on the ImageNet-1K dataset [DDS+09; RDS+15], and then refines this model for the target task.

Though the exact underpinnings of transfer learning are not fully understood, recent work has identified factors that make pre-trained ImageNet models amenable to transfer learning. For example, [HAE16; KBZ+19] investigate the effect of the source dataset; Kornblith et al. [KSL19] find that pre-trained models with higher ImageNet accuracy also tend to transfer better; Azizpour et al. [ARS+15] observe that increasing depth improves transfer more than increasing width.

Our contributions. In this work, we identify another factor that affects transfer learning performance: adversarial robustness [BCM+13; SZS+14]. We find that despite being less accurate on ImageNet, adversarially robust neural networks match or improve on the transfer performance of their standard counterparts. We first establish this trend in the “fixed-feature” setting, in which one trains a linear classifier on top of features extracted from a pre-trained network. Then, we show that this trend carries forward to the more

*Equal contribution.

Table 1: Transfer performance of robust and standard ImageNet models on 12 downstream classification tasks. For each transfer learning paradigm, we report accuracy averaged over ten random trials of standard and robust models. We used a grid search (using a disjoint set of random seeds) to find the best hyperparameters, architecture, and (for robust models) robustness level ϵ . In each column, we bold the entry with the higher average accuracy; if the accuracy difference is significant (as judged by a 95% CI two-tailed Welch’s t-test [WEL47]) we bold only the higher entry, otherwise (if the test is inconclusive) we bold both.

Mode	Model	Dataset											
		Aircraft	Birdsnap	CIFAR-10	CIFAR-100	Caltech-101	Caltech-256	Cars	DTD	Flowers	Food	Pets	SUN397
Fixed-feature	Robust	44.24	50.75	95.50	81.16	92.54	85.16	51.35	70.38	92.05	69.32	92.08	58.80
	Standard	38.52	48.40	81.29	60.08	90.01	82.87	44.54	70.32	91.83	65.73	91.92	56.02
Full-network	Robust	86.26	76.41	98.70	89.22	95.67	87.92	91.37	77.05	96.94	89.10	94.36	64.97
	Standard	86.19	75.90	97.72	86.20	94.85	86.54	91.37	76.11	97.13	88.61	94.43	63.90

complex “full-network” transfer setting, in which the pre-trained model is entirely fine-tuned on the relevant downstream task. We carry out our study on a suite of image classification tasks (summarized in Table 1), object detection, and instance segmentation.

Our results are consistent with (and in fact, add to) recent hypotheses suggesting that adversarial robustness leads to improved feature representations [EIS+19b; AL20]. Still, future work is needed to confirm or refute such hypotheses, and more broadly, to understand what properties of pre-trained models are important for transfer learning.

2 Motivation: Fixed-Feature Transfer Learning

In one of the most basic variants of transfer learning, one uses the source model as a feature extractor for the target dataset, then trains a simple (often linear) model on the resulting features. In our setting, this corresponds to first passing each image in the target dataset through a pre-trained ImageNet classifier, and then using the outputs from the penultimate layer as the image’s feature representation. Prior work has demonstrated that applying this “fixed-feature” transfer learning approach yields accurate classifiers for a variety of vision tasks and often out-performs task-specific handcrafted features [SAS+14]. However, we still do not completely understand the factors driving transfer learning performance.

How can we improve transfer learning? Conventional wisdom and evidence from prior work [CSV+14; SZ15; KSL19; HRS+17] suggest that accuracy on the source dataset is a strong indicator of performance on downstream tasks. In particular, Kornblith et al. [KSL19] find that pre-trained ImageNet models with higher accuracy yield better fixed-feature transfer learning results.

Still, it is unclear if improving ImageNet accuracy is the only way to improve performance. After all, the behaviour of fixed-feature transfer is governed by models’ learned representations, which are not fully described by source-dataset accuracy. These representations are, in turn, controlled by the *priors* that we put on them during training. For example, the use of architectural components [UVL17], alternative loss functions [MIM+18], and data augmentation [VM01] have all been found to put distinct priors on the features extracted by classifiers.

The adversarial robustness prior. In this work, we turn our attention to another prior: *adversarial robustness*. Adversarial robustness refers to a model’s invariance to small (often imperceptible) perturbations of its inputs. Robustness is typically induced at training time by replacing the standard empirical risk minimization objective with a robust optimization objective [MMS+18]:


$$\min_{\theta} \mathbb{E}_{(x,y) \sim D} [\mathcal{L}(x, y; \theta)] \implies \min_{\theta} \mathbb{E}_{(x,y) \sim D} \left[\max_{\|\delta\|_2 \leq \epsilon} \mathcal{L}(x + \delta, y; \theta) \right], \quad (1)$$

where ϵ is a hyperparameter governing how invariant the resulting “adversarially robust model” (more briefly, “robust model”) should be. In short, this objective asks the model to minimize risk on the training datapoints while also being locally stable in the (radius- ϵ) neighbourhood around each of these points. (A more detailed primer on adversarial robustness is given in Appendix E.)

Adversarial robustness was originally studied in the context of machine learning security [BCM+13; BR18; CW17] as a method for improving models’ resilience to adversarial examples [GSS15; MMS+18]. However, a recent line of work has studied adversarially robust models in their own right, casting (1) as a prior on learned feature representations [EIS+19b; ISE+19; JBZ+19; ZZ19].

Should adversarial robustness help fixed-feature transfer? It is, a priori, unclear what to expect from an “adversarial robustness prior” in terms of transfer learning. On one hand, robustness to adversarial examples may seem somewhat tangential to transfer performance. In fact, adversarially robust models are known to be significantly less accurate than their standard counterparts [TSE+19; SZC+18; RXY+19; Nak19], suggesting that using adversarially robust feature representations should hurt transfer performance.

On the other hand, recent work has found that the feature representations of robust models carry several advantages over those of standard models. For example, adversarially robust representations typically have better-behaved gradients [TSE+19; STT+19; ZZ19; KCL19] and thus facilitate regularization-free feature visualization [EIS+19b] (cf. Figure 1a). Robust representations are also approximately invertible [EIS+19b], meaning that unlike for standard models [MV15; DB16], an image can be approximately reconstructed directly from its robust representation (cf. Figure 1b). More broadly, Engstrom et al. [EIS+19b] hypothesize that by forcing networks to be invariant to signals that humans are also invariant to, the robust training objective leads to feature representations that are more similar to what humans use. This suggests, in turn, that adversarial robustness might be a desirable prior from the point of view of transfer learning.

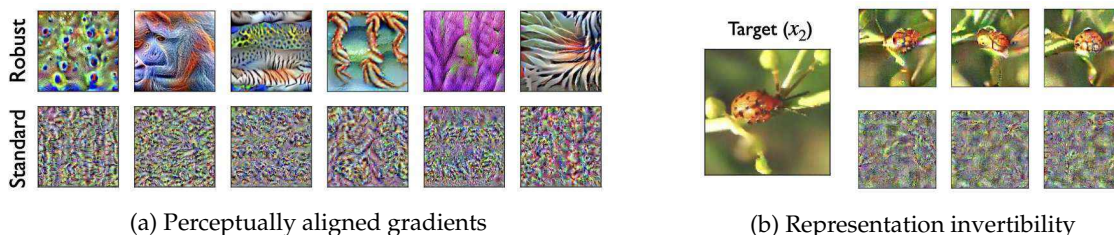

(a) Perceptually aligned gradients

(b) Representation invertibility

Figure 1: Adversarially robust (top) and standard (bottom) representations: robust representations allow (a) feature visualization without regularization; (b) approximate image inversion by minimizing distance in representation space. Figures reproduced from Engstrom et al. [EIS+19b].

Experiments. To resolve these two conflicting hypotheses, we use a test bed of 12 standard transfer learning datasets (all the datasets considered in [KSL19] as well as Caltech-256 [GHP07]) to evaluate fixed-feature transfer on standard and adversarially robust ImageNet models. We consider four ResNet-based architectures (ResNet-{18,50}, WideResNet-50-x{2,4}), and train models with varying robustness levels ϵ for each architecture (for the full experimental setup, see Appendix A).

In Figure 2, we compare the downstream transfer accuracy of a standard model to that of the best robust model with the same architecture (grid searching over ϵ ¹). The results indicate that robust networks consistently extract better features for transfer learning than standard networks—this effect is most pronounced on Aircraft, CIFAR-10, CIFAR-100, Food, SUN397, and Caltech-101. Due to computational constraints, we could not train WideResNet-50-4x models at the same number of robustness levels ϵ , so a coarser grid was used. It is thus likely that a finer grid search over ϵ would further improve results (we discuss the role of ϵ in more detail in Section 4.3).

¹To ensure a fair comparison (i.e., that the gains observed are not an artifact of training many random robust models), we first use a set of random seeds to select the best ϵ level, and then calculate the performance for just that ϵ using a separate set of random seeds.

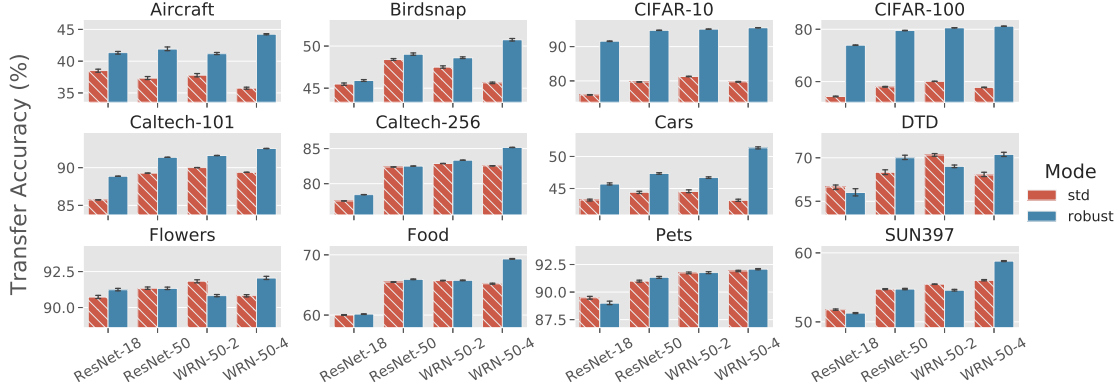


Figure 2: **Fixed-feature** transfer learning results using standard and robust models for the 12 downstream image classification tasks considered. Following [KSL19], we record re-weighted accuracy for the unbalanced datasets, and raw accuracy for the others (cf. Appendix A). Error bars denote one standard deviation computed over ten random trials.

3 Adversarial Robustness and Full-Network Fine Tuning

A more expensive but often better-performing transfer learning method uses the pre-trained model as a weight initialization rather than as a feature extractor. In this “full-network” transfer learning setting, we update all of the weights of the pre-trained model (via gradient descent) to minimize loss on the target task. Kornblith et al. [KSL19] find that for standard models, performance on full-network transfer learning is highly correlated with performance on fixed-feature transfer learning. Therefore, we might hope that the findings of the last section (i.e., that adversarially robust models transfer better) also carry over to this setting. To resolve this conjecture, we consider three applications of full-network transfer learning: image classification (i.e., the tasks considered in Section 2), object detection, and instance segmentation.

Downstream image classification We first recreate the setup of Section 2: we perform full-network transfer learning to adapt the robust and non-robust pre-trained ImageNet models to the same set of 12 downstream classification tasks. The hyperparameters for training were found via grid search (cf. Appendix A). Our findings are shown in Figure 3—just as in fixed-feature transfer learning, robust models match or improve on standard models in terms of transfer learning performance.

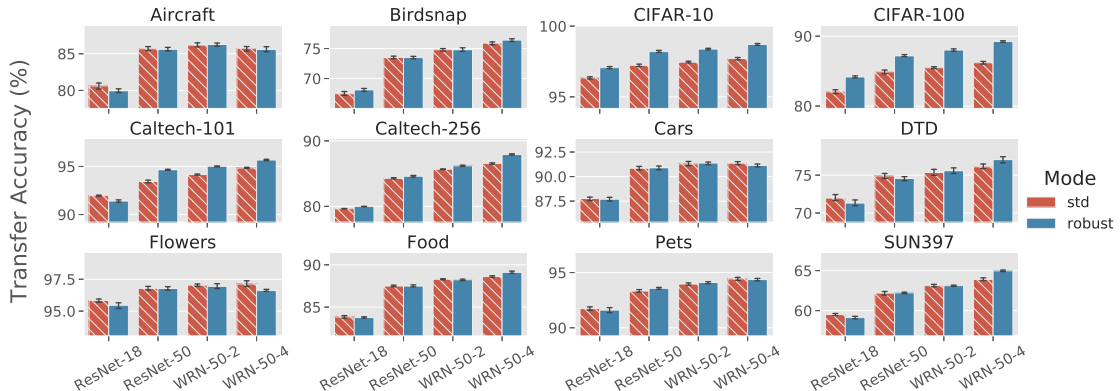


Figure 3: **Full-network** transfer learning results using standard and robust models for the 12 downstream image classification tasks considered. Following [KSL19], we record re-weighted accuracy for the unbalanced datasets, and raw accuracy for the others (cf. Appendix A). Error bars denote one standard deviation computed with ten random trials.

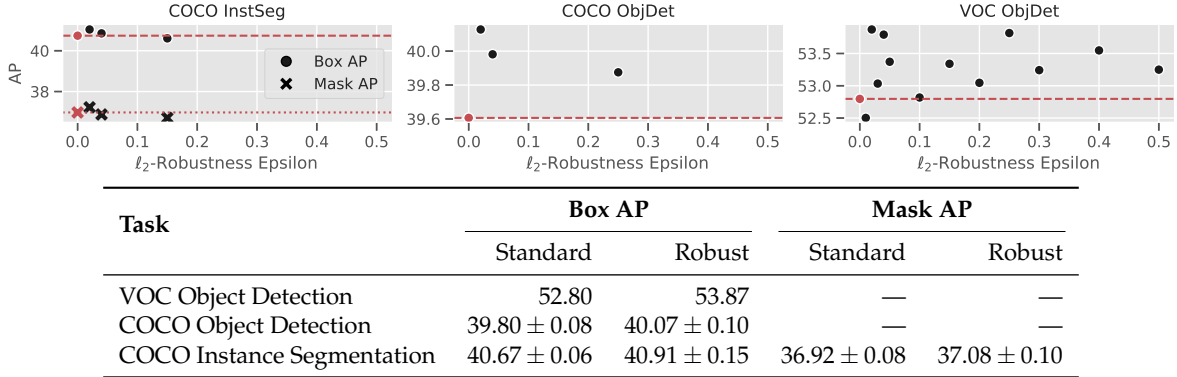


Figure 4: AP of instance segmentation and object detection models with backbones initialized with ϵ -robust models before training. Robust backbones generally lead to better AP, and the best robust backbone always outperforms the standardly trained backbone for every task. COCO results averaged over four runs due to computational constraints; \pm represents standard deviation.

Object detection and instance segmentation It is standard practice in data-scarce object detection or instance segmentation tasks to initialize earlier model layers with weights from ImageNet-trained classification networks. We study the benefits of using robustly trained networks to initialize object detection and instance segmentation models, and find that adversarially robust networks consistently outperform standard networks.

We evaluate with benchmarks in both object detection (PASCAL Visual Object Classes (VOC) [EVW+10] and Microsoft COCO [LMB+14]) and instance segmentation (Microsoft COCO). We train systems using default models and hyperparameter configurations from the Detectron2 [WKM+19] framework (i.e., we do not perform any additional hyperparameter search). Appendix C describes further experimental details and more results.

We first study object detection. We train Faster R-CNN FPN [LDG+17] models with varying ResNet-50 backbone initializations. For VOC, we initialize with one standard network, and twelve adversarially robust networks with different values of ϵ . For COCO, we only train with three adversarially robust models (due to computational constraints). For instance segmentation, we train Mask R-CNN FPN models [HGD+17] while varying ResNet-50 backbone initialization. We train three models using adversarially robust initializations, and one model from a standardly trained ResNet-50. Figure 4 summarizes our findings: the best robust backbone initializations outperform standard models.

4 Analysis and Discussion

Our results from the previous section indicate that robust models match or improve on the transfer learning performance of standard ones. In this section, we take a closer look at the similarities and differences in transfer learning between robust networks and standard networks.

4.1 ImageNet accuracy and transfer performance

In Section 2, we discussed a potential tension between the desirable properties of robust network representations (which we conjectured would improve transfer performance) and the decreased accuracy of the corresponding models (which, as prior work has established, should hurt transfer performance). We hypothesize that robustness and accuracy have counteracting yet separate effects: that is, higher accuracy improves transfer learning for a fixed level of robustness, and higher robustness improves transfer learning for a fixed level of accuracy.

To test this hypothesis, we first study the relationship between ImageNet accuracy and transfer accuracy for each of the robust models that we trained. Under our hypothesis, we should expect to see a deviation

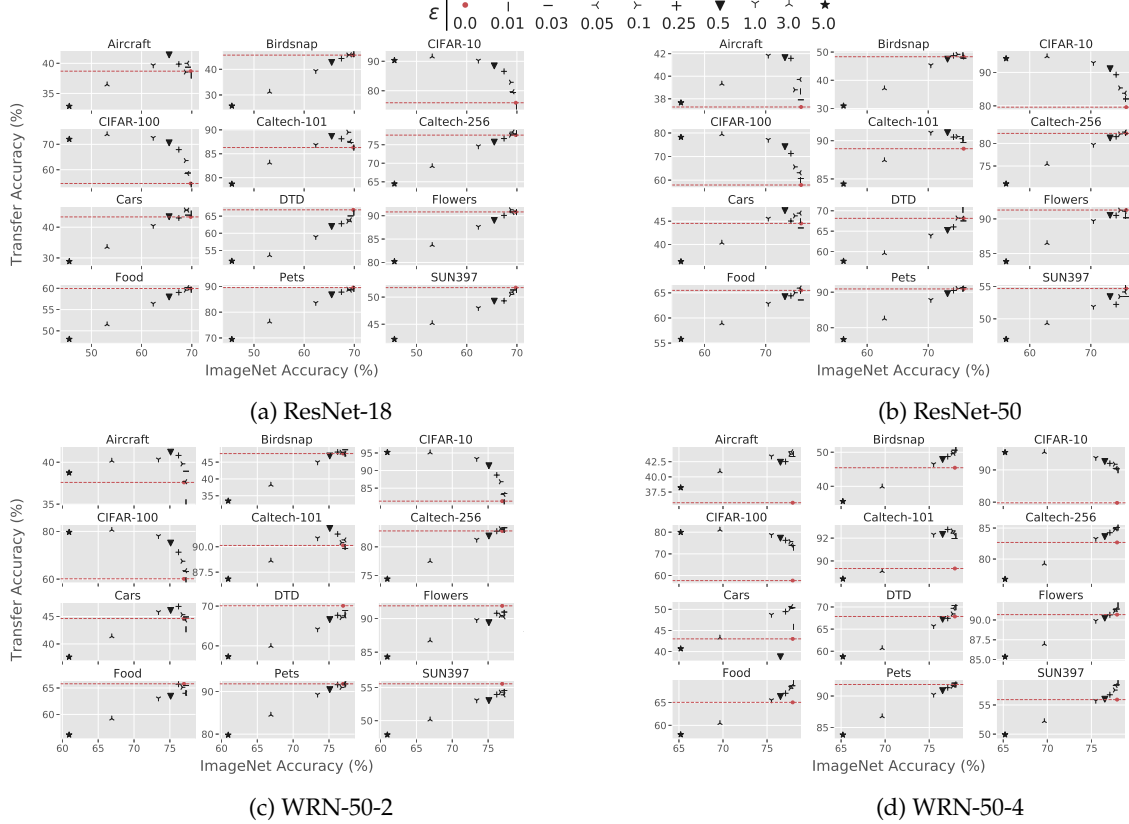


Figure 5: **Fixed-feature** transfer accuracies of standard and robust ImageNet models to various image classification datasets. The linear relationship between ImageNet and transfer accuracies does not hold. Full numerical results (i.e., in tabular form) are available in Appendix G.

from the direct linear accuracy-transfer relation observed by [KSL19], due to the confounding factor of varying robustness. The results (cf. Figure 5; similar results for full-network transfer in Appendix F) support this. Indeed, we find that the previously observed linear relationship between accuracy and transfer performance is often violated once robustness aspect comes into play.

In even more direct support of our hypothesis (i.e., that robustness and ImageNet accuracy have opposing yet separate effects on transfer), we find that when the robustness level is held fixed, the accuracy-transfer correlation observed by prior works for standard models actually holds for robust models too. Specifically, we train highly robust ($\epsilon = 3$)—and thus less accurate—models with six different architectures, and compared ImageNet accuracy against transfer learning performance. Table 2 shows that for these models improving ImageNet accuracy improves transfer performance at around the same rate as (and with higher R^2 correlation than) standard models.

These observations suggest that transfer learning performance can be further improved by applying known techniques that increase the accuracy of robust models (e.g. [BGH19; CRS+19]). More broadly, our findings also indicate that accuracy is not a sufficient measure of feature quality or versatility. Understanding why robust networks transfer particularly well remains an open problem, likely relating to prior work that analyses the features these networks use [EIS+19b; SSZ+19; AL20].

4.2 Robust models improve with width

Our experiments also reveal a contrast between robust and standard models in how their transfer performance scales with model width. Azizpour et al. [ARS+15], find that although increasing network depth improves transfer performance, increasing width hurts it. Our results corroborate this trend for standard

Table 2: Source (ImageNet) and target (CIFAR-10) accuracies, fixing robustness (ϵ) but varying architecture. When robustness is controlled for, ImageNet accuracy is highly predictive of transfer performance. Similar trends for other datasets are shown in Appendix F.

Robustness	Dataset	Architecture (see details in Appendix A.1)						R^2
		A	B	C	D	E	F	
Std ($\epsilon = 0$)	ImageNet	77.37	77.32	73.66	65.26	64.25	60.97	—
	CIFAR-10	97.84	97.47	96.08	95.86	95.82	95.55	
Adv ($\epsilon = 3$)	ImageNet	66.12	65.92	56.78	50.05	42.87	41.03	—
	CIFAR-10	98.67	98.22	97.27	96.91	96.23	95.99	

networks, but indicate that it does *not* hold for robust networks, at least in the regime of widths tested. Indeed, Figure 6 plots results for the three widths of ResNet-50 studied here (x1, x2, and x4), along with a ResNet-18 for reference: as width increases, transfer performance plateaus and decreases for standard models, but continues to steadily grow for robust models. This suggests that scaling network width may further increase the transfer performance gain of robust networks over the standard ones. (This increase comes, however, at a higher computational cost.)

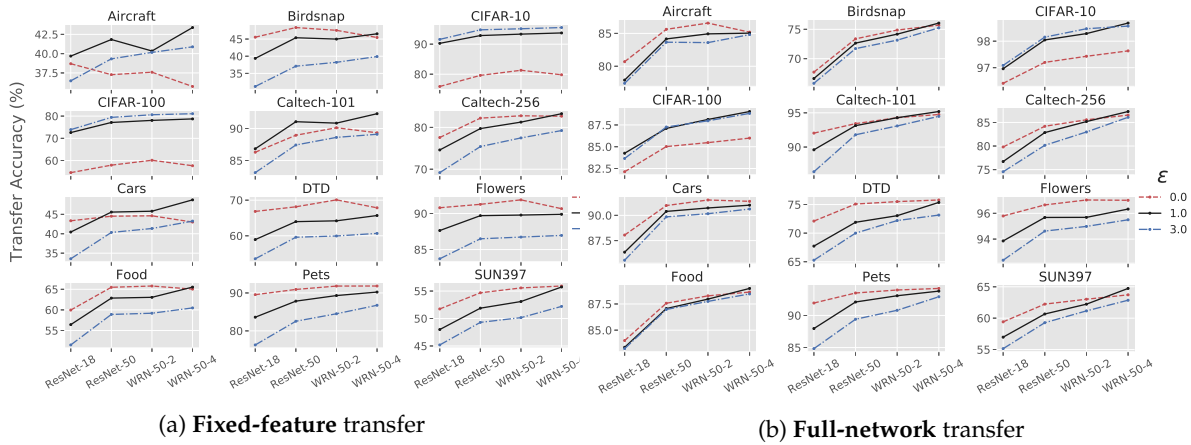


Figure 6: Varying width and model robustness while transfer learning from ImageNet to various datasets. Generally, as width increases, transfer learning accuracies of standard models generally plateau or level off while those of robust models steadily increase. More values of ϵ are in Appendix F.

4.3 Optimal robustness levels for downstream tasks

We observe that although the best robust models often outperform the best standard models, the optimal choice of robustness parameter ϵ varies widely between datasets. For example, when transferring to CIFAR-10 and CIFAR-100, the optimal ϵ values were 3.0 and 1.0, respectively. In contrast, smaller values of ϵ (smaller by an order of magnitude) tend to work better for the rest of the datasets.

One possible explanation for this variability in the optimal choice of ϵ might relate to dataset granularity. We hypothesize that on datasets where leveraging finer-grained features are necessary (i.e., where there is less norm-separation between classes in the input space), the most effective values of ϵ will be much smaller than for a dataset where leveraging more coarse-grained features suffices. To illustrate this, consider a binary classification task consisting of image-label pairs (x, y) , where the correct class for an image $y \in \{0, 1\}$ is determined by a single pixel, i.e., $x_{0,0} = \delta \cdot y$, and $x_{i,j} = 0$, otherwise. We would expect transferring a standard model onto this dataset to yield perfect accuracy regardless of δ , since the dataset is perfectly separable. On the other hand, a robust model is trained to be invariant to perturbations of norm ϵ —thus,

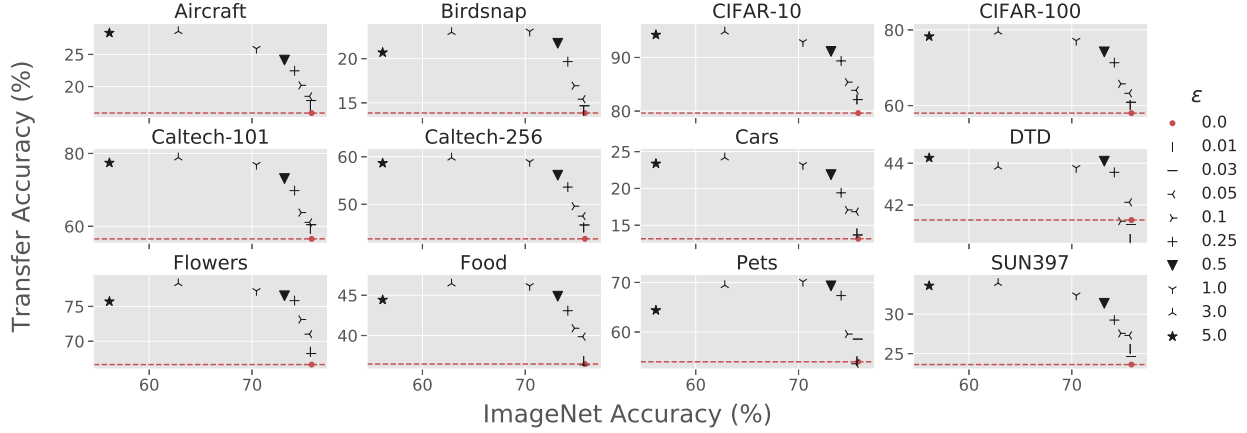


Figure 7: **Fixed-feature** transfer accuracies of various datasets that are down-scaled to 32×32 before being up-scaled again to ImageNet scale and used for transfer learning. The accuracy curves are closely aligned, unlike those of Figure 5, which illustrates the same experiment without downscaling.

if $\delta < \epsilon$, the dataset will not appear separable to the standard model and so we expect transfer to be less successful. So, the smaller the δ (i.e., the larger the “fine grained-ness” of the dataset), the smaller the ϵ must be for successful transfer.

Unifying dataset scale. We now present evidence in support of our above hypothesis. Although we lack a quantitative notion of granularity (in reality, features are not simply singular pixels), we consider image resolution as a crude proxy. Since we scale target datasets to match ImageNet dimensions, each pixel in a low-resolution dataset (e.g., CIFAR-10) image translates into several pixels in transfer, thus inflating datasets’ separability. Drawing from this observation, we attempt to calibrate the granularities of the 12 image classification datasets used in this work, by first downscaling all the images to the size of CIFAR-10 (32×32), and then upscaling them to ImageNet size once more. We then repeat the fixed-feature regression experiments from prior sections, plotting the results in Figure 7 (similar results for full-network transfer are presented in Appendix F). After controlling for original dataset dimension, the datasets’ epsilon vs. transfer accuracy curves all behave almost identically to CIFAR-10 and CIFAR-100 ones. Note that while this experimental data supports our hypothesis, we do not take the evidence as an ultimate one and further exploration is needed to reach definitive conclusions.

4.4 Comparing adversarial robustness to texture robustness

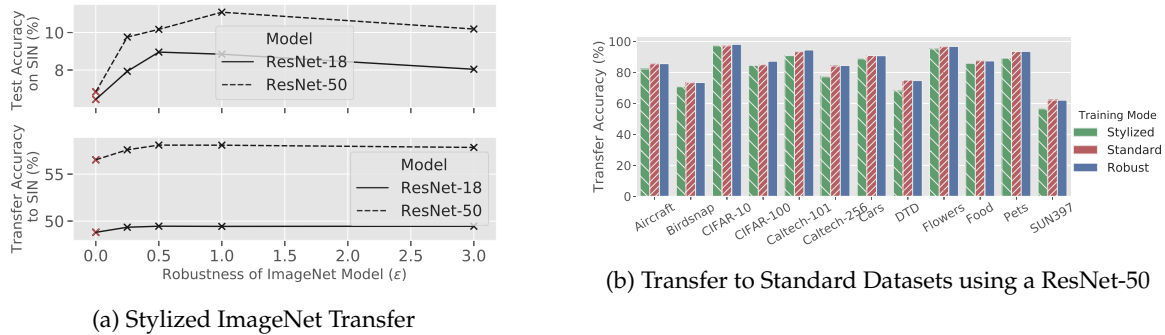


Figure 8: We compare standard, stylized and robust ImageNet models on standard transfer tasks (and to stylized ImageNet).

We now investigate the effects of adversarial robustness on transfer learning performance in comparison to other invariances commonly imposed on deep neural networks. Specifically, we consider texture-invariant [GRM+19] models, i.e., models trained on the Stylized ImageNet (SIN) [GRM+19] dataset. Figure 8b shows that transfer learning from adversarially robust models outperforms transfer learning from texture-invariant models on all considered datasets.

Finally, we use the SIN dataset to further re-inforce the benefits conferred by adversarial robustness. Figure 8a top shows that robust models outperform standard imagenet models when evaluated (top) or fine-tuned (bottom) on Stylized-ImageNet.

5 Related Work

A number of works study transfer learning with CNNs [DJV+14; CSV+14; SAS+14; ARS+15]. Indeed, transfer learning has been studied in varied domains including medical imaging [MGM18], language modeling [CK18], and various object detection and segmentation related tasks [RHG+15; DLH+16; HRS+17; CPK+17]. In terms of methods, others [AGM14; CSV+14; GDD+14; YCB+14; ARS+15; LRM15; HAE16; CMB+16] show that fine-tuning typically outperforms frozen feature-based methods. As discussed throughout this paper, several prior works [ARS+15; HAE16; KSL19; ZSS+18; KBZ+19; SSS+17; MGR+18; YCB+14] have investigated factors improving or otherwise affecting transfer learning performance. Recently proposed methods have achieved state-of-the-art performance on downstream tasks by scaling up transfer learning techniques [HCB+18; KBZ+19].

On the adversarial robustness front, many works—both empirical (e.g., [MMS+18; MMK+18; BGH19; ZYJ+19]) and certified (e.g., [LAG+19; WZC+18; WK18; RSL18; CRK19; SLR+19; YDH+20])—significantly increase model resilience to adversarial examples [BCM+13; SZS+14]. A growing body of research has studied the *features* learned by these robust networks and suggested that they improve upon those learned by standard networks (cf. [ISE+19; EIS+19b; STT+19; AL20; KSJ19; KCL19] and references). On the other hand, prior studies have also identified theoretical and empirical tradeoffs between standard accuracy and adversarial robustness [TSE+19; BPR18; SZC+18; RXY+19]. At the intersection of robustness and transfer learning, Shafahi et al. [SSZ+19] investigate transfer learning for increasing downstream-task adversarial robustness (rather than downstream accuracy, as in this work). Aggarwal et al. [ASK+20] find that adversarially trained models perform better at downstream zero-shot learning tasks and weakly-supervised object localization. Finally, concurrent to our work, [UKE+20] also study the transfer performance of adversarially robust networks. Our studies reach similar conclusions and are otherwise complementary: here we study a larger set of downstream datasets and tasks and analyze the effects of model accuracy, model width, and data resolution; Utrera et al. [UKE+20] study the effects of training duration, dataset size, and also introduce an influence function-based analysis [KL17] to study the representations of robust networks. For a detailed discussion of prior work, see Appendix D.

6 Conclusion

In this work, we propose using adversarially robust models for transfer learning. We compare transfer learning performance of robust and standard models on a suite of 12 classification tasks, object detection, and instance segmentation. We find that adversarial robust neural networks consistently match or improve upon the performance of their standard counterparts, despite having lower ImageNet accuracy. We also take a closer look at the behavior of adversarially robust networks, and study the interplay between ImageNet accuracy, model width, robustness, and transfer performance.

Acknowledgements

Work supported in part by the NSF awards CCF-1553428, CNS-1815221, the Open Philanthropy Project AI Fellowship, and the Microsoft Corporation. This material is based upon work supported by the Defense Advanced Research Projects Agency (DARPA) under Contract No. HR001120C0015.

References

- [AEI+18] Anish Athalye, Logan Engstrom, Andrew Ilyas, and Kevin Kwok. “Synthesizing Robust Adversarial Examples”. In: *International Conference on Machine Learning (ICML)*. 2018.
- [AGM14] Pulkit Agrawal, Ross Girshick, and Jitendra Malik. “Analyzing the performance of multilayer neural networks for object recognition”. In: *European conference on computer vision*. 2014.
- [AL20] Zeyuan Allen-Zhu and Yuanzhi Li. “Feature Purification: How Adversarial Training Performs Robust Deep Learning”. In: 2020. arXiv: [2005.10190 \[cs.LG\]](#).
- [ARS+15] Hossein Azizpour, Ali Sharif Razavian, Josephine Sullivan, Atsuto Maki, and Stefan Carlsson. “Factors of transferability for a generic convnet representation”. In: *IEEE transactions on pattern analysis and machine intelligence* (2015).
- [ASK+20] Gunjan Aggarwal, Abhishek Sinha, Nupur Kumari, and Mayank Singh. “On the Benefits of Models with Perceptually-Aligned Gradients”. In: *Towards Trustworthy ML Workshop (ICLR)*. 2020.
- [BCM+13] Battista Biggio, Iginio Corona, Davide Maiorca, Blaine Nelson, Nedim Šrndić, Pavel Laskov, Giorgio Giacinto, and Fabio Roli. “Evasion attacks against machine learning at test time”. In: *Joint European conference on machine learning and knowledge discovery in databases (ECML-KDD)*. 2013.
- [BGH19] Yogesh Balaji, Tom Goldstein, and Judy Hoffman. “Instance adaptive adversarial training: Improved accuracy tradeoffs in neural nets”. In: *Arxiv preprint arXiv:1910.08051*. 2019.
- [BGV14] Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. “Food-101—mining discriminative components with random forests”. In: *European conference on computer vision*. 2014.
- [BLW+14] Thomas Berg, Jiongxin Liu, Seung Woo Lee, Michelle L Alexander, David W Jacobs, and Peter N Belhumeur. “Birdsnap: Large-scale fine-grained visual categorization of birds”. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 2014.
- [BPR18] Sébastien Bubeck, Eric Price, and Ilya Razenshteyn. “Adversarial examples from computational constraints”. In: *arXiv preprint arXiv:1805.10204*. 2018.
- [BR18] Battista Biggio and Fabio Roli. “Wild patterns: Ten years after the rise of adversarial machine learning”. In: 2018.
- [CK18] Alexis Conneau and Douwe Kiela. “Senteval: An evaluation toolkit for universal sentence representations”. In: *arXiv preprint arXiv:1803.05449* (2018).
- [CMB+16] Brian Chu, Vashisht Madhavan, Oscar Beijbom, Judy Hoffman, and Trevor Darrell. “Best practices for fine-tuning visual classifiers to new domains”. In: *European conference on computer vision*. 2016.
- [CMK+14] Mircea Cimpoi, Subhransu Maji, Iasonas Kokkinos, Sammy Mohamed, and Andrea Vedaldi. “Describing textures in the wild”. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 2014.
- [CPK+17] Liang-Chieh Chen, George Papandreou, Iasonas Kokkinos, Kevin Murphy, and Alan L Yuille. “Deeplab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected crfs”. In: *IEEE transactions on pattern analysis and machine intelligence* (2017).
- [CRK19] Jeremy M Cohen, Elan Rosenfeld, and J Zico Kolter. “Certified adversarial robustness via randomized smoothing”. In: *arXiv preprint arXiv:1902.02918*. 2019.
- [CRS+19] Yair Carmon, Aditi Raghunathan, Ludwig Schmidt, Percy Liang, and John C Duchi. “Unlabeled data improves adversarial robustness”. In: *Neural Information Processing Systems (NeurIPS)*. 2019.
- [CSV+14] Ken Chatfield, Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman. “Return of the devil in the details: Delving deep into convolutional nets”. In: *arXiv preprint arXiv:1405.3531* (2014).

- [CW17] Nicholas Carlini and David Wagner. “Adversarial Examples Are Not Easily Detected: Bypassing Ten Detection Methods”. In: *Workshop on Artificial Intelligence and Security (AISec)*. 2017.
- [Dan67] John M. Danskin. *The Theory of Max-Min and its Application to Weapons Allocation Problems*. 1967.
- [DB16] Alexey Dosovitskiy and Thomas Brox. “Inverting visual representations with convolutional networks”. In: *Computer Vision and Pattern Recognition (CVPR)*. 2016.
- [DDS+09] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. “Imagenet: A large-scale hierarchical image database”. In: *computer vision and pattern recognition (CVPR)*. 2009.
- [DJV+14] Jeff Donahue, Yangqing Jia, Oriol Vinyals, Judy Hoffman, Ning Zhang, Eric Tzeng, and Trevor Darrell. “Decaf: A deep convolutional activation feature for generic visual recognition”. In: *International conference on machine learning (ICML)*. 2014.
- [DLH+16] Jifeng Dai, Yi Li, Kaiming He, and Jian Sun. “R-fcn: Object detection via region-based fully convolutional networks”. In: *Advances in neural information processing systems (NeurIPS)*. 2016.
- [EEF+18] Ivan Evtimov, Kevin Eykholt, Earlene Fernandes, Tadayoshi Kohno, Bo Li, Atul Prakash, Amir Rahmati, and Dawn Song. “Robust Physical-World Attacks on Machine Learning Models”. In: *Conference on Computer Vision and Pattern Recognition (CVPR)*. 2018.
- [EIS+19a] Logan Engstrom, Andrew Ilyas, Hadi Salman, Shibani Santurkar, and Dimitris Tsipras. *Robustness (Python Library)*. 2019. URL: <https://github.com/MadryLab/robustness>.
- [EIS+19b] Logan Engstrom, Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Brandon Tran, and Aleksander Madry. “Adversarial Robustness as a Prior for Learned Representations”. In: *ArXiv preprint arXiv:1906.00945*. 2019.
- [EVW+10] M. Everingham, L. Van Gool, C. K. I. Williams, J. Winn, and A. Zisserman. “The Pascal Visual Object Classes (VOC) Challenge”. In: *International Journal of Computer Vision*. 2010.
- [FFP04] Li Fei-Fei, Rob Fergus, and Pietro Perona. “Learning generative visual models from few training examples: An incremental bayesian approach tested on 101 object categories”. In: *2004 conference on computer vision and pattern recognition workshop*. IEEE. 2004, pp. 178–178.
- [GCL+19] Ruiqi Gao, Tianle Cai, Haochuan Li, Liwei Wang, Cho-Jui Hsieh, and Jason D Lee. “Convergence of Adversarial Training in Overparametrized Networks”. In: *arXiv preprint arXiv:1906.07916* (2019).
- [GDD+14] Ross Girshick, Jeff Donahue, Trevor Darrell, and Jitendra Malik. “Rich feature hierarchies for accurate object detection and semantic segmentation”. In: *computer vision and pattern recognition (CVPR)*. 2014, pp. 580–587.
- [GHP07] Gregory Griffin, Alex Holub, and Pietro Perona. “Caltech-256 object category dataset”. In: (2007).
- [GRM+19] Robert Geirhos, Patricia Rubisch, Claudio Michaelis, Matthias Bethge, Felix A. Wichmann, and Wieland Brendel. “ImageNet-trained CNNs are biased towards texture; increasing shape bias improves accuracy and robustness.” In: *International Conference on Learning Representations*. 2019.
- [GSS15] Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. “Explaining and Harnessing Adversarial Examples”. In: *International Conference on Learning Representations (ICLR)*. 2015.
- [HAE16] Minyoung Huh, Pulkita Agrawal, and Alexei A Efros. “What makes ImageNet good for transfer learning?” In: *arXiv preprint arXiv:1608.08614* (2016).
- [HCB+18] Yanping Huang, Youlong Cheng, Ankur Bapna, Orhan Firat, Mia Xu Chen, Dehao Chen, HyoukJoong Lee, Jiquan Ngiam, Quoc V. Le, Yonghui Wu, and Zhifeng Chen. “GPipe: Efficient Training of Giant Neural Networks using Pipeline Parallelism”. In: *ArXiv preprint arXiv:1811.06965*. 2018.
- [HGD+17] Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. “Mask r-cnn”. In: *Proceedings of the IEEE international conference on computer vision*. 2017, pp. 2961–2969.

- [HRS+17] Jonathan Huang, Vivek Rathod, Chen Sun, Menglong Zhu, Anoop Korattikara, Alireza Fathi, Ian Fischer, Zbigniew Wojna, Yang Song, Sergio Guadarrama, et al. "Speed/accuracy trade-offs for modern convolutional object detectors". In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2017.
- [IEA+18] Andrew Ilyas, Logan Engstrom, Anish Athalye, and Jessy Lin. "Black-box Adversarial Attacks with Limited Queries and Information". In: *International Conference on Machine Learning (ICML)*. 2018.
- [ISE+19] Andrew Ilyas, Shibani Santurkar, Logan Engstrom, Brandon Tran, and Aleksander Madry. "Adversarial Examples Are Not Bugs, They Are Features". In: *Neural Information Processing Systems (NeurIPS)*. 2019.
- [JBZ+19] Jorn-Henrik Jacobsen, Jens Behrmann, Richard Zemel, and Matthias Bethge. "Excessive Invariance Causes Adversarial Vulnerability". In: *International Contemporary on Learning Representations*. 2019.
- [KBZ+19] Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Joan Puigcerver, Jessica Yung, Sylvain Gelly, and Neil Houlsby. "Big Transfer (BiT): General Visual Representation Learning". In: *arXiv preprint arXiv:1912.11370* (2019).
- [KCL19] Simran Kaur, Jeremy Cohen, and Zachary C. Lipton. "Are Perceptually-Aligned Gradients a General Property of Robust Classifiers?" In: *Arxiv preprint arXiv:1910.08640*. 2019.
- [KDS+13] Jonathan Krause, Jia Deng, Michael Stark, and Li Fei-Fei. "Collecting a large-scale dataset of fine-grained cars". In: (2013).
- [KL17] Pang Wei Koh and Percy Liang. "Understanding Black-box Predictions via Influence Functions". In: *ICML*. 2017.
- [Kri09] Alex Krizhevsky. "Learning Multiple Layers of Features from Tiny Images". In: *Technical report*. 2009.
- [KSJ19] Beomsu Kim, Junghoon Seo, and Taegyun Jeon. "Bridging Adversarial Robustness and Gradient Interpretability". In: *International Conference on Learning Representations Workshop on Safe Machine Learning (ICLR SafeML)*. 2019.
- [KSL19] Simon Kornblith, Jonathon Shlens, and Quoc V Le. "Do better imagenet models transfer better?" In: *computer vision and pattern recognition (CVPR)*. 2019.
- [LAG+19] Mathias Lecuyer, Vaggelis Atlidakis, Roxana Geambasu, Daniel Hsu, and Suman Jana. "Certified robustness to adversarial examples with differential privacy". In: *Symposium on Security and Privacy (SP)*. 2019.
- [LDG+17] Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie. "Feature pyramid networks for object detection". In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2017, pp. 2117–2125.
- [LMB+14] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. "Microsoft coco: Common objects in context". In: *European conference on computer vision (ECCV)*. 2014.
- [LRM15] Tsung-Yu Lin, Aruni RoyChowdhury, and Subhransu Maji. "Bilinear cnn models for fine-grained visual recognition". In: *Proceedings of the IEEE international conference on computer vision*. 2015.
- [LSK19] Juncheng Li, Frank R. Schmidt, and J. Zico Kolter. "Adversarial camera stickers: A physical camera-based attack on deep learning systems". In: *Arxiv preprint arXiv:1904.00759*. 2019.
- [MGM18] Romain Mormont, Pierre Geurts, and Raphaël Marée. "Comparison of deep transfer learning strategies for digital pathology". In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*. 2018.
- [MGR+18] Dhruv Mahajan, Ross Girshick, Vignesh Ramanathan, Kaiming He, Manohar Paluri, Yixuan Li, Ashwin Bharambe, and Laurens van der Maaten. "Exploring the limits of weakly supervised pretraining". In: *Proceedings of the European Conference on Computer Vision (ECCV)*. 2018.

- [MIM+18] Nikhil Muralidhar, Mohammad Raihanul Islam, Manish Marwah, Anuj Karpatne, and Naren Ramakrishnan. "Incorporating prior domain knowledge into deep neural networks". In: *2018 IEEE International Conference on Big Data (Big Data)*. 2018.
- [MMK+18] Takeru Miyato, Shin-ichi Maeda, Masanori Koyama, and Shin Ishii. "Virtual adversarial training: a regularization method for supervised and semi-supervised learning". In: 2018.
- [MMS+18] Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. "Towards deep learning models resistant to adversarial attacks". In: *International Conference on Learning Representations (ICLR)*. 2018.
- [MRK+13] Subhransu Maji, Esa Rahtu, Juho Kannala, Matthew Blaschko, and Andrea Vedaldi. "Fine-grained visual classification of aircraft". In: *arXiv preprint arXiv:1306.5151* (2013).
- [MV15] Aravindh Mahendran and Andrea Vedaldi. "Understanding deep image representations by inverting them". In: *computer vision and pattern recognition (CVPR)*. 2015.
- [Nak19] Preetum Nakkiran. "Adversarial robustness may be at odds with simplicity". In: *arXiv preprint arXiv:1901.00532*. 2019.
- [NZ08] Maria-Elena Nilsback and Andrew Zisserman. "Automated flower classification over a large number of classes". In: *2008 Sixth Indian Conference on Computer Vision, Graphics & Image Processing*. 2008.
- [PMG+17] Nicolas Papernot, Patrick McDaniel, Ian Goodfellow, Somesh Jha, Z Berkay Celik, and Ananthram Swami. "Practical black-box attacks against machine learning". In: *Asia Conference on Computer and Communications Security*. 2017.
- [PVZ+12] Omkar M Parkhi, Andrea Vedaldi, Andrew Zisserman, and CV Jawahar. "Cats and dogs". In: *2012 IEEE conference on computer vision and pattern recognition*. IEEE. 2012, pp. 3498–3505.
- [RDS+15] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. "ImageNet Large Scale Visual Recognition Challenge". In: *International Journal of Computer Vision (IJCV)*. 2015.
- [RHG+15] Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. "Faster r-cnn: Towards real-time object detection with region proposal networks". In: *Advances in neural information processing systems (NeurIPS)*. 2015.
- [RSL18] Aditi Raghunathan, Jacob Steinhardt, and Percy Liang. "Certified defenses against adversarial examples". In: *International Conference on Learning Representations (ICLR)*. 2018.
- [RWK20] Leslie Rice, Eric Wong, and J. Zico Kolter. "Overfitting in adversarially robust deep learning". In: *Arxiv preprint arXiv:2002.11569*. 2020.
- [RXY+19] Aditi Raghunathan, Sang Michael Xie, Fanny Yang, John C Duchi, and Percy Liang. "Adversarial Training Can Hurt Generalization". In: *arXiv preprint arXiv:1906.06032* (2019).
- [SAS+14] Ali Sharif Razavian, Hossein Azizpour, Josephine Sullivan, and Stefan Carlsson. "CNN features off-the-shelf: an astounding baseline for recognition". In: *conference on computer vision and pattern recognition (CVPR) workshops*. 2014.
- [SLR+19] Hadi Salman, Jerry Li, Ilya Razenshteyn, Pengchuan Zhang, Huan Zhang, Sebastien Bubeck, and Greg Yang. "Provably robust deep learning via adversarially trained smoothed classifiers". In: *Advances in Neural Information Processing Systems (NeurIPS)*. 2019.
- [SSS+17] Chen Sun, Abhinav Shrivastava, Saurabh Singh, and Abhinav Gupta. "Revisiting unreasonable effectiveness of data in deep learning era". In: *Proceedings of the IEEE international conference on computer vision*. 2017.
- [SSZ+19] Ali Shafahi, Parsa Saadatpanah, Chen Zhu, Amin Ghiasi, Christoph Studer, David Jacobs, and Tom Goldstein. "Adversarially robust transfer learning". In: *arXiv preprint arXiv:1905.08232* (2019).

- [STT+19] Shibani Santurkar, Dimitris Tsipras, Brandon Tran, Andrew Ilyas, Logan Engstrom, and Aleksander Madry. "Image Synthesis with a Single (Robust) Classifier". In: *Neural Information Processing Systems (NeurIPS)*. 2019.
- [SZ15] Karen Simonyan and Andrew Zisserman. "Very Deep Convolutional Networks for Large-Scale Image Recognition". In: *International Conference on Learning Representations (ICLR)*. 2015.
- [SZC+18] Dong Su, Huan Zhang, Hongge Chen, Jinfeng Yi, Pin-Yu Chen, and Yupeng Gao. "Is Robustness the Cost of Accuracy? A Comprehensive Study on the Robustness of 18 Deep Image Classification Models". In: *European Conference on Computer Vision (ECCV)*. 2018.
- [SZS+14] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. "Intriguing properties of neural networks". In: *International Conference on Learning Representations (ICLR)*. 2014.
- [TSE+19] Dimitris Tsipras, Shibani Santurkar, Logan Engstrom, Alexander Turner, and Aleksander Madry. "Robustness May Be at Odds with Accuracy". In: *International Conference on Learning Representations (ICLR)*. 2019.
- [UKE+20] Francisco Utrera, Evan Kravitz, N. Benjamin Erichson, Rajiv Khanna, and Michael W. Mahoney. "Adversarially-Trained Deep Nets Transfer Better". In: *ArXiv preprint arXiv:2007.05869*. 2020.
- [UVL17] Dmitry Ulyanov, Andrea Vedaldi, and Victor Lempitsky. "Deep Image Prior". In: *ArXiv preprint arXiv:1711.10925*. 2017.
- [VM01] David A Van Dyk and Xiao-Li Meng. "The art of data augmentation". In: *Journal of Computational and Graphical Statistics*. 2001.
- [Wal45] Abraham Wald. "Statistical Decision Functions Which Minimize the Maximum Risk". In: *Annals of Mathematics*. 1945.
- [WEL47] B. L. WELCH. "THE GENERALIZATION OF 'STUDENT'S' PROBLEM WHEN SEVERAL DIFFERENT POPULATION VARIANCES ARE INVOLVED". In: *Biometrika*. 1947.
- [WK18] Eric Wong and J Zico Kolter. "Provable defenses against adversarial examples via the convex outer adversarial polytope". In: *International Conference on Machine Learning (ICML)*. 2018.
- [WKM+19] Yuxin Wu, Alexander Kirillov, Francisco Massa, Wan-Yen Lo, and Ross Girshick. *Detectron2*. <https://github.com/facebookresearch/detectron2>. 2019.
- [WZC+18] Tsui-Wei Weng, Huan Zhang, Hongge Chen, Zhao Song, Cho-Jui Hsieh, Duane Boning, Inderjit S Dhillon, and Luca Daniel. "Towards fast computation of certified robustness for ReLU networks". In: *International Conference on Machine Learning (ICML)*. 2018.
- [XHE+10] Jianxiong Xiao, James Hays, Krista A Ehinger, Aude Oliva, and Antonio Torralba. "Sun database: Large-scale scene recognition from abbey to zoo". In: *Computer Vision and Pattern Recognition (CVPR)*. 2010.
- [YCB+14] Jason Yosinski, Jeff Clune, Yoshua Bengio, and Hod Lipson. "How transferable are features in deep neural networks?" In: *Advances in neural information processing systems (NeurIPS)*. 2014.
- [YDH+20] Greg Yang, Tony Duan, J. Edward Hu, Hadi Salman, Ilya Razenshteyn, and Jerry Li. *Randomized Smoothing of All Shapes and Sizes*. 2020.
- [ZPD+20] Yi Zhang, Orestis Plevrakis, Simon S. Du, Xingguo Li, Zhao Song, and Sanjeev Arora. "Over-parameterized Adversarial Training: An Analysis Overcoming the Curse of Dimensionality". In: *Arxiv preprint arXiv:2002.06668*. 2020.
- [ZSS+18] Amir R Zamir, Alexander Sax, William Shen, Leonidas J Guibas, Jitendra Malik, and Silvio Savarese. "Taskonomy: Disentangling task transfer learning". In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 2018.
- [ZY+19] Hongyang Zhang, Yaodong Yu, Jiantao Jiao, Eric Xing, Laurent El Ghaoui, and Michael Jordan. "Theoretically Principled Trade-off between Robustness and Accuracy". In: *International Conference on Machine Learning (ICML)*. 2019.

- [ZZ19] Tianyuan Zhang and Zhanxing Zhu. “Interpreting Adversarially Trained Convolutional Neural Networks”. In: *International Conference on Machine Learning (ICML)*. 2019.

A Experimental Setup

A.1 Pretrained ImageNet models

In this paper, we train a number of standard and robust ImageNet models on various architectures. These models are used for all the various transfer learning experiments.

Architectures We experiment with several standard architectures from the PyTorch’s Torchvision². These models are shown in Tables 3&4.³

Table 3: The clean accuracies of standard and ℓ_2 -robust ImageNet classifiers used in our paper.

Clean ImageNet Top-1 Accuracy (%)										
Model	Robustness parameter ϵ									
	0	0.01	0.03	0.05	0.1	0.25	0.5	1	3	5
ResNet-18	69.79	69.90	69.24	69.15	68.77	67.43	65.49	62.32	53.12	45.59
ResNet-50	75.80	75.68	75.76	75.59	74.78	74.14	73.16	70.43	62.83	56.13
WRN-50-2	76.97	77.25	77.26	77.17	76.74	76.21	75.11	73.41	66.90	60.94
WRN-50-4	77.91	78.02	77.87	77.77	77.64	77.10	76.52	75.51	69.67	65.20

Clean ImageNet Top-1 Accuracy (%)						
	Model Architecture					
	A DenseNet-161	B ResNeXt50	C VGG16-bn	D MobileNet-v2	E ShuffleNet	F MNASNET
$\epsilon = 0$	77.37	77.32	73.66	65.26	64.25	60.97
$\epsilon = 3$	66.12	65.92	56.78	50.05	42.87	41.03

Table 4: The clean accuracies of ℓ_∞ -robust ImageNet classifiers.

Clean ImageNet Top-1 Accuracy (%)					
Model	Robustness parameter ϵ				
	$\frac{0.5}{255}$	$\frac{1}{255}$	$\frac{2}{255}$	$\frac{4}{255}$	$\frac{8}{255}$
ResNet-18	66.13	63.46	59.63	52.49	42.11
ResNet-50	73.73	72.05	69.10	63.86	54.53
WRN-50-2	75.82	74.65	72.35	68.41	60.82

Training details We fix the training procedure for all of these models. We train all the models from scratch using SGD with batch size of 512, momentum of 0.9, and weight decay of $1e-4$. We train for 90 epochs with an initial learning rate of 0.1 that drops by a factor of 10 every 30 epochs.

For **Standard Training**, we use the standard cross-entropy multi-class classification loss. For **Robust Training**, we use adversarial training [MMS+18]. We train on adversarial examples generated within maximum allowed perturbations ℓ_2 of $\epsilon \in \{0.01, 0.03, 0.05, 0.1, 0.25, 0.5, 1, 3, 5\}$ and ℓ_∞ perturbations of $\epsilon \in \{\frac{0.5}{255}, \frac{1}{255}, \frac{2}{255}, \frac{4}{255}, \frac{8}{255}\}$ using 3 attack steps and a step size of $\frac{\epsilon \times 2}{3}$.

²These models can be found here <https://pytorch.org/docs/stable/torchvision/models.html>

³WRN-50-2 and WRN-50-4 refer to Wide-ResNet-50, twice and four times as wide, respectively.

A.2 ImageNet transfer to classification datasets

A.2.1 Datasets

Table 5: Classification datasets used in this paper.

Dataset	Classes	Size (Train/Test)	Accuracy Metric
Birdsnap [BLW+14]	500	32,677 / 8,171	Top-1
Caltech-101 [FFP04]	101	3,030 / 5,647	Mean Per-Class
Caltech-256 [GHP07]	257	15,420 / 15,187	Mean Per-Class
CIFAR-10 [Kri09]	10	50,000 / 10,000	Top-1
CIFAR-100 [Kri09]	100	50,000 / 10,000	Top-1
Describable Textures (DTD) [CMK+14]	47	3,760 / 1,880	Top-1
FGVC Aircraft [MRK+13]	100	6,667 / 3,333	Mean Per-Class
Food-101 [BGV14]	101	75,750 / 25,250	Top-1
Oxford 102 Flowers [NZ08]	102	2,040 / 6,149	Mean Per-Class
Oxford-IIIT Pets [PVZ+12]	37	3,680 / 3,669	Mean Per-Class
SUN397 [XHE+10]	397	19,850 / 19,850	Top-1
Stanford Cars [KDS+13]	196	8,144 / 8,041	Top-1

We test transfer learning starting from ImageNet pretrained models on classification datasets that are used in [KSL19]. These datasets vary in size the number of classes and datapoints. The details are shown in Table 5.

A.2.2 Fixed-feature Transfer

For this type of transfer learning, we *freeze* the weights of the ImageNet pretrained model⁴, and replace the last fully connected layer with a random initialized one that fits the transfer dataset. We train only this new layer for 150 epochs using SGD with batch size of 64, momentum of 0.9, weight decay of $5e - 4$, and an initial $\text{lr} \in \{0.01, 0.001\}$ that drops by a factor of 10 every 50 epochs. We use the following standard data-augmentation methods:

```
TRAIN_TRANSFORMS = transforms.Compose([
    transforms.RandomResizedCrop(224),
    transforms.RandomHorizontalFlip(),
    transforms.ToTensor(),
])
TEST_TRANSFORMS = transforms.Compose([
    transforms.Resize(256),
    transforms.CenterCrop(224),
    transforms.ToTensor()
])
```

A.2.3 Full-network transfer

For full-network transfer learning, we use the exact same hyperparameters as the fixed-feature setting, but we *do not freeze* the weights of the pretrained ImageNet model.

A.3 Unifying dataset scale

For this experiment, we follow the exact experimental setup of A.2 with the only modification being resizing all the datasets to 32×32 then do dataaugmentation as before:

⁴For all of our experiments, we do not freeze the batch statistics, only its weights.

```
TRAIN_TRANSFORMS = transforms.Compose([
    transforms.Resize(32),
    transforms.RandomResizedCrop(224),
    transforms.RandomHorizontalFlip(),
    transforms.ToTensor(),
])
TEST_TRANSFORMS = transforms.Compose([
    transforms.Resize(32),
    transforms.Resize(256),
    transforms.CenterCrop(224),
    transforms.ToTensor()
])
```

A.4 Replicate our results

We desired simplicity and kept reproducibility in our minds when conducting our experiments, so we use standard hyperparameters and minimize the number of tricks needed to replicate our results. We open source all the standard and robust ImageNet models that we use in our paper, and our code is available at <https://github.com/Microsoft/robust-models-transfer>.

B Transfer Learning with ℓ_∞ -robust ImageNet models

We investigate how well other types of robust ImageNet models do in transfer learning.

Table 6: Transfer Accuracy of standard vs ℓ_∞ -robust ImageNet models on CIFAR-10 and CIFAR-100.

Dataset	Transfer Type	Model	Transfer Accuracy (%)					
			Robustness parameter ε					
			0.0	$\frac{0.5}{255}$	$\frac{1.0}{255}$	$\frac{2.0}{255}$	$\frac{4.0}{255}$	$\frac{8.0}{255}$
CIFAR-10	Full-network	ResNet-18	96.05	96.85	96.80	96.98	97.04	96.79
		ResNet-50	97.14	97.69	97.84	97.98	97.92	98.01
	Fixed-feature	ResNet-18	75.02	87.13	89.01	89.07	90.56	89.18
		ResNet-50	78.16	90.55	91.51	92.74	93.35	93.68
CIFAR-100	Full-network	ResNet-18	81.70	83.66	83.46	83.98	83.55	82.82
		ResNet-50	84.75	86.12	86.48	87.06	86.90	86.21
	Fixed-feature	ResNet-18	53.86	68.52	70.83	72.00	72.19	69.78
		ResNet-50	55.57	72.89	74.16	76.22	77.17	76.70

C Object Detection and Instance Segmentation

In this section we provide more experimental details, and results, relating to our object detection and instance segmentation experiments.

Experimental setup. We use only standard configurations from Detectron2⁵ to train models. For COCO tasks, compute limitations made training from every ε initialization impossible. Instead, we trained from every ε initialization using a reduced learning rate schedule (the corresponding 1x learning rate schedule in Detectron2) before training from the top three ε initializations (by Box AP) along with the standard model using the full learning rate training schedule (the 3x schedule). Our results for the 1x learning rate search are in Figure 9; our results, similar to those in Section 3, show that training from a robustly trained backbone yields greater AP than training from a standard-trained backbone.

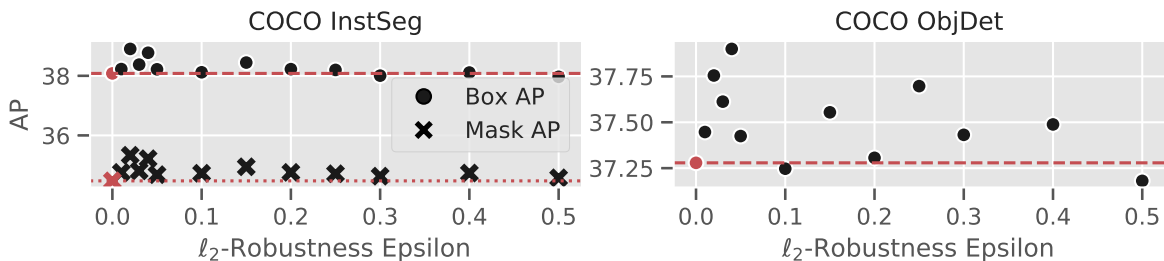


Figure 9: AP of instance segmentation and object detection models with backbones initialized with ε -robust models before training. Robust backbones generally lead to better AP, and the best robust backbone always outperforms the standard-trained backbone for every task.

⁵See: https://github.com/facebookresearch/detectron2/blob/master/MODEL_ZOO.md For all COCO tasks we used "R50-FPN" configurations (1x and 3x, described further in this section), and for VOC we used the "R50-C4" configuration.

Baselines. We use standard ResNet-50 models from the torchvision package⁶ using the Robustness library [EIS+19a]. Detectron2 models were originally trained for (and their configurations are tuned for) ResNet-50 models from the original ResNet code release⁷, which are slightly different from the torchvision ResNet-50s we use. It has been previously noted that models trained from torchvision perform worse with Detectron2 than these original models⁸. Despite this, the best torchvision ResNet-50 models we train from robust initializations dominate (without any additional hyperparameter searching) the original baselines except for the COCO Object Detection task in terms of AP, in which the original baseline has 0.07 larger Box AP⁹.

⁶<https://pytorch.org/docs/stable/torchvision/index.html>

⁷<https://github.com/KaimingHe/deep-residual-networks>

⁸See for both previous note and model differences: <https://github.com/facebookresearch/detectron2/blob/master/tools/convert-torchvision-to-d2.py>

⁹Baselines found here: https://github.com/facebookresearch/detectron2/blob/master/MODEL_ZOO.md

D Related Work

Transfer learning. Transfer learning has been investigated in a number of early works which extracted features from ImageNet CNNs and trained SVMs or logistic regression classifiers using these features on new datasets/tasks [DJV+14; CSV+14; SAS+14]. These ImageNet features were shown to outperform hand-crafted features even on tasks different from ImageNet classification. [SAS+14; DJV+14]. Later on, [ARS+15] demonstrated that transfer using deep networks is more effective than using wide networks across many transfer tasks. A number of works has furthermore studied the transfer problem in the domain of medical imaging [MGM18] and language modeling [CK18]. Besides, many of research in the literature has indicated that, specifically in computer vision, fine-tuning typically performs better than classification based on freezed features [AGM14; CSV+14; GDD+14; YCB+14; ARS+15; LRM15; HAE16; CMB+16].

ImageNet pretrained networks have also been widely used as backbone models for various object detections models including Faster R-CNN and R-FCN [RHG+15; DLH+16]. More accurate ImageNet models tend to lead to better overall object detection accuracy [HRS+17]. Similar usage is also common in image segmentation [CPK+17].

Several works have studied how modifying the source dataset can affect the transfer accuracy. [ARS+15; HAE16] investigated the importance of the number of classes vs. number of images per class for learning better fixed image features, and these works have reached to conflicting conclusions [KSL19]. [YCB+14] showed that freezing only the first layer of AlexNet does not affect the transfer performance between natural and manmade subsets of ImageNet as opposed to freezing more layers. Other works demonstrated that transfer learning works even when the target dataset is large by transferring features learnt on a very large image datasets to ImageNet [SSS+17; MGR+18].

More recently, [ZSS+18] proposed a method to improve the efficiency of transfer learning when labeled data from multiple domain are available. Furthermore, studied whether better ImageNet models transfer better to other datasets or not [KSL19]. It shows a strong correlation between the transfer accuracy of a pretrained ImageNet model (both for the logistic regression and finetuning settings) and the top-1 accuracy of these models on ImageNet. Finally, [KBZ+19] explored pretraining using enormous amount of data of around 300 million noisily labelled images, and showed improvements in transfer learning over pretraining on ImageNet for several tasks.

Transfer learning and robustness. A recent work [SSZ+19] investigated the problem of adversarially robust transfer learning: transferring adversarially robust representations to new datasets while maintaining robustness on the downstream task. While this work might look very similar to ours, there are two key differences. The first is that this work investigates using robust source models for the purpose of improving/maintaining robustness on the downstream task, did not investigate whether robust source models can improve the clean accuracy on the downstream tasks. The second is that they point out that starting from a standard trained ImageNet model leads to better natural accuracy when used for downstream tasks, the opposite of what we show in the paper: we show that one can get better transfer accuracies using robust, but less accurate, ImageNet pretrained models.

Robustness as a prior for learning representation. A major goal in deep learning is to learn robust high-level feature representations of input data. However, current standard neural networks seem to learn non-robust features that can be easily exploited to generate adversarial examples. On the other hand, a number of recent papers have argued that the features learned by adversarially robust models are less vulnerable to adversarial examples, and at the same time are more perceptually aligned with humans [ISE+19; EIS+19b]. Specifically, [ISE+19] presented a framework to study and disentangle robust and non-robust features for standard trained networks. Concurrently, [EIS+19b] utilized this framework to show that robust optimization can be re-cast as a tool for enforcing priors on the features learned by deep neural networks. They showed that the representations learned by robust models make significant progress towards learning a high-level encoding of inputs.

E Background on Adversarially Robust Models

Adversarial examples in computer vision. Adversarial examples [BCM+13; SZS+14] (also referred to as *adversarial attacks*) are imperceptible perturbations to natural inputs that induce misbehaviour from machine learning—in this context computer vision—systems. An illustration of such an attack is shown in Figure 10. The discovery of adversarial examples was a major contributor to the rise of *deep learning security*, where prior work has focused on both robustifying models against such attacks (cf. [GSS15; MMS+18; WK18; RSL18; CRK19] and their references), as well as testing the robustness of machine learning systems in “real-world” settings (cf. [PMG+17; AEI+18; IEA+18; LSK19; EEF+18] and their references). A model that is resilient to such adversarial examples is referred to as “adversarially robust.”

Robust optimization and adversarial training. One of the canonical methods for training an adversarially robust model is robust optimization. Typically, we train deep learning models using empirical risk minimization (ERM) over the training data—that is, we solve:

$$\min_{\theta} \frac{1}{n} \sum_{i=1}^n \mathcal{L}(x_i, y_i; \theta),$$

where θ represents the model parameters, \mathcal{L} is a task-dependent loss function (e.g., cross-entropy loss for classification), and $\{(x_i, y_i) \sim \mathcal{D}\}$ are training image-label pairs. In robust optimization (dating back to the work of Wald [Wal45]), we replace this standard ERM objective with a *robust* risk minimization objective:

$$\min_{\theta} \frac{1}{n} \sum_{i=1}^n \max_{x': d(x_i, x') < \varepsilon} \mathcal{L}(x', y_i),$$

where d is a fixed but arbitrary norm. (In practice, d is often assumed to be an ℓ_p norm for $p \in \{2, \infty\}$ —for the majority of this work we set $p = 2$, so $d(x, x')$ is the Euclidean norm.) In short, rather than minimizing the loss on only the training points, we instead minimize the worst-case loss over a ball around each training point. Assuming the robust objective generalizes, it ensures that an adversary cannot perturb a given test point $(x, y) \sim \mathcal{D}$ and drastically increase the loss of the model. The parameter ε governs the desired robustness of the model: $\varepsilon = 0$ corresponds to standard (ERM) training, and increasing ε results in models that are stable within larger and larger radii.

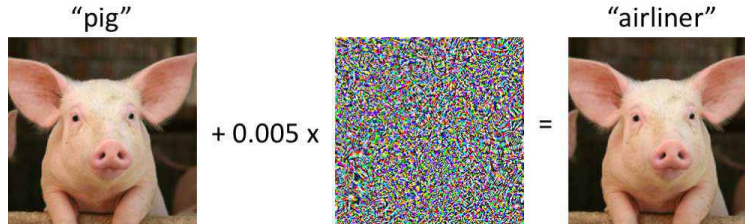


Figure 10: An example of an adversarial attack: adding the imperceptible perturbation (middle) to a correctly classified pig (left) results in a near-identical image that is classified as “airliner” by an Inception-v3 ImageNet model.

At first glance, it is unclear how to effectively solve the robust risk minimization problem posed above—typically we use SGD to minimize risk, but here the loss function has an embedded maximization, so the corresponding SGD update rule would be:

$$\theta_t \leftarrow \theta_{t-1} - \eta \cdot \nabla_{\theta} \left(\max_{x': d(x', x_i) < \varepsilon} \mathcal{L}(x', y_i; \theta) \right).$$

Thus, to actually train an adversarially robust neural network, Madry et al. [MMS+18] turn to inspiration from robust convex optimization, where Danskin’s theorem [Dan67] says that for a function $f(\alpha, \beta)$ that is

convex in α ,

$$\nabla_{\alpha} \left(\max_{\beta \in B} f(\alpha, \beta) \right) = \nabla_{\alpha} f(\alpha, \beta^*), \quad \text{where } \beta^* = \arg \max_{\beta} f(\alpha, \beta) \text{ and } B \text{ is compact.}$$

Danskin’s theorem thus allows us to write the gradient of a minimax problem in terms of only the gradient of the inner objective, evaluated at its maximal point. Carrying this intuition over to the neural network setting (despite the lack of convexity) results in the popular *adversarial training* algorithm [GSS15; MMS+18], where at each training iteration, worst-case (adversarial) inputs are passed to the neural network rather than standard unmodified inputs. Despite its simplicity, adversarial training remains a competitive baseline for training adversarially robust networks [RWK20]. Furthermore, recent works have provided theoretical evidence for the success of adversarial training directly in the neural network setting [GCL+19; AL20; ZPD+20].

F Omitted Figures

F.1 Full-network Transfer: additional results to Figure 5

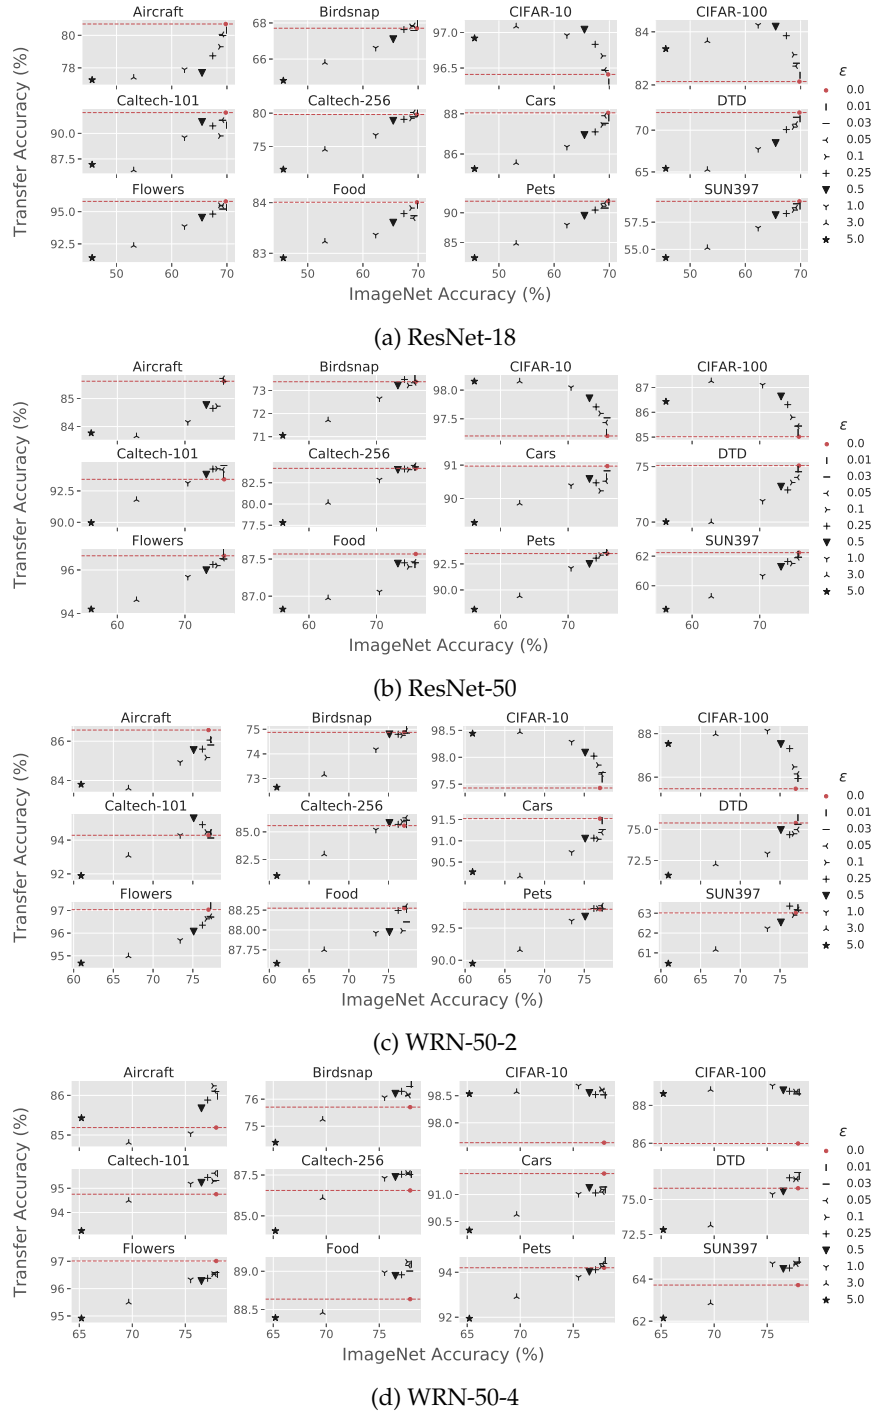


Figure 11: **Full-network** transfer accuracies of standard and robust ImageNet models to various image classification datasets. The linear relationship between accuracy and transfer performance does not hold; instead, for fixed accuracy, generally increased robustness yields higher transfer accuracy.

F.2 Varying architecture: additional results to Table 2

Table 7: Source (ImageNet) and target accuracies, fixing robustness (ϵ) but varying architecture. When robustness is controlled for, ImageNet accuracy is highly predictive of (full-network) transfer performance.

Robustness	Dataset	Architecture (see details in Appendix A.1)						R^2
		A	B	C	D	E	F	
Std ($\epsilon = 0$)	ImageNet	77.37	77.32	73.66	65.26	64.25	60.97	—
	CIFAR-10	97.84	97.47	96.08	95.86	95.82	95.55	0.79
	CIFAR-100	86.53	85.53	82.07	80.02	80.76	80.41	0.82
	Caltech-101	94.78	94.63	91.32	88.91	87.13	83.28	0.94
	Caltech-256	86.22	86.33	82.23	76.51	75.81	74.90	0.98
	Cars	91.28	91.27	90.97	88.31	85.81	84.54	0.91
	Flowers	97.93	97.29	96.80	96.25	95.40	72.06	0.44
	Pets	94.55	94.26	92.63	89.78	88.59	82.69	0.87
Adv ($\epsilon = 3$)	ImageNet	66.12	65.92	56.78	50.05	42.87	41.03	—
	CIFAR-10	98.67	98.22	97.27	96.91	96.23	95.99	0.97
	CIFAR-100	88.65	88.32	84.14	83.32	80.92	80.52	0.97
	Caltech-101	93.84	93.31	89.93	89.02	83.29	75.52	0.83
	Caltech-256	84.35	83.05	78.19	74.08	69.19	70.04	0.99
	Cars	90.91	90.08	89.67	88.02	83.57	78.76	0.79
	Flowers	95.77	96.01	93.88	94.25	91.47	26.98	0.38
	Pets	91.85	91.46	88.06	85.63	80.92	64.90	0.72

F.3 Stylized ImageNet Transfer: additional results to Figure 8b



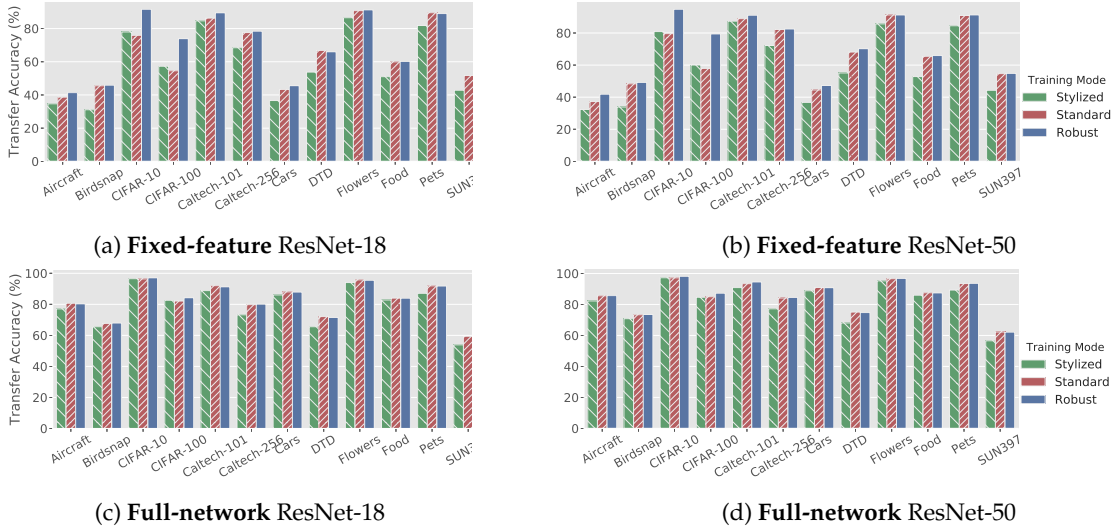


Figure 12: We compare standard, stylized and robust ImageNet models on standard transfer tasks.

F4 Unified scale: additional results to Figure 7

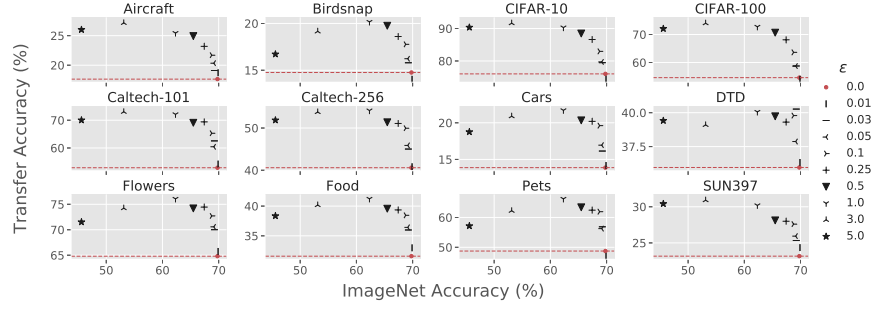


(a) ResNet-18

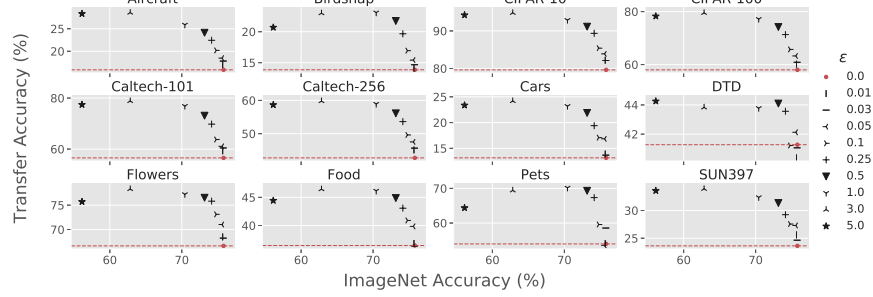


(b) ResNet-50 (same as Figure 7)

Figure 13: **Fixed-feature** transfer accuracies of various datasets that are down-scaled to 32×32 before being up-scaled again to ImageNet scale and used for transfer learning. The accuracy curves are closely aligned, unlike those of Figure 5, which illustrates the same experiment without downscaling.

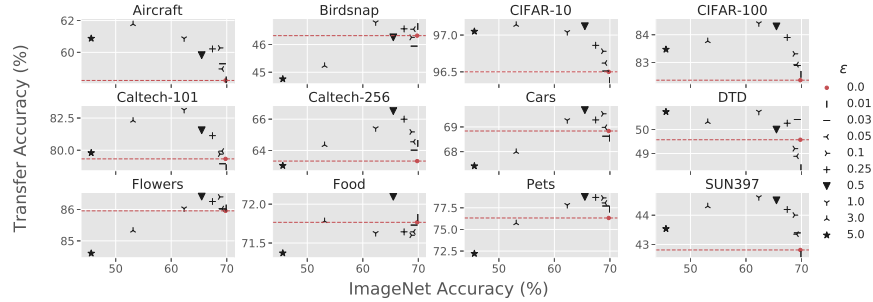

(a) ResNet-18

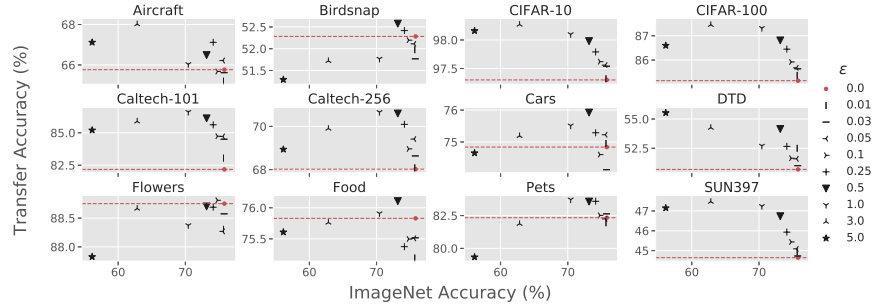

(b) ResNet-50

Figure 14: **Full-network** transfer accuracies of various datasets that are down-scaled to 32×32 before being up-scaled again to ImageNet scale and used for transfer learning.

F.5 Effect of width: additional results to Figure 6

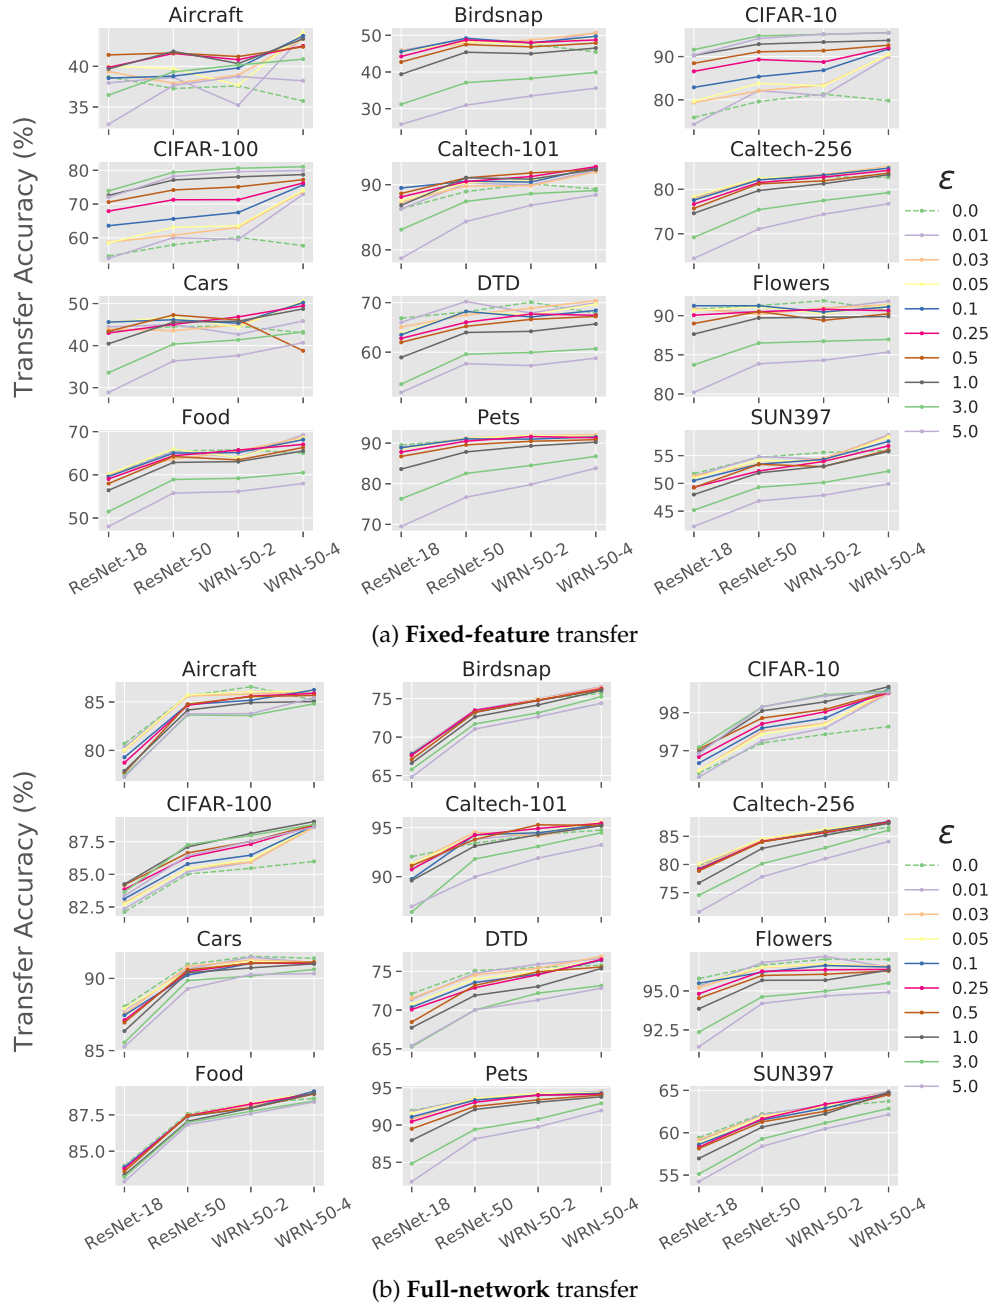


Figure 15: Varying width and model robustness while transfer learning from ImageNet to various datasets. Generally, as width increases, transfer learning accuracies of standard models generally plateau or level off while those of robust models steadily increase.

G Detailed Numerical Results

G.1 Fixed-feature transfer to classification tasks (Fig. 5)

Table 8: Fixed-feature transfer for various standard and robust ImageNet models and datasets.

Dataset	Model	Transfer Accuracy (%)									
		Robustness parameter ϵ									
		0.00	0.01	0.03	0.05	0.10	0.25	0.50	1.00	3.00	5.00
Aircraft	ResNet-18	38.69	37.96	39.35	40.00	38.55	39.87	41.40	39.68	36.47	32.87
	ResNet-50	37.27	38.65	37.91	39.71	38.79	41.58	41.64	41.83	39.32	37.65
	WRN-50-2	37.59	35.22	38.92	37.68	39.80	40.81	41.20	40.34	40.16	38.74
	WRN-50-4	35.74	43.76	43.34	44.14	43.75	42.51	42.40	43.38	40.88	38.23
Birdsnap	ResNet-18	45.54	45.88	45.86	45.66	45.55	44.23	42.72	39.38	31.19	25.73
	ResNet-50	48.35	48.86	47.84	48.24	49.19	48.73	47.48	45.38	37.10	30.95
	WRN-50-2	47.54	47.47	48.68	47.48	47.93	48.01	46.84	44.99	38.23	33.47
	WRN-50-4	45.45	50.72	50.60	49.66	49.73	48.73	47.88	46.53	39.91	35.58
CIFAR-10	ResNet-18	75.91	74.33	79.35	79.67	82.87	86.58	88.45	90.27	91.59	90.31
	ResNet-50	79.61	82.12	82.07	83.78	85.35	89.31	91.10	92.86	94.77	94.16
	WRN-50-2	81.31	80.98	83.43	83.23	86.83	88.73	91.37	93.34	95.12	95.19
	WRN-50-4	79.81	89.90	90.35	90.48	91.76	92.03	92.62	93.73	95.53	95.43
CIFAR-100	ResNet-18	54.58	53.92	58.70	58.51	63.60	67.91	70.58	72.60	73.91	72.01
	ResNet-50	57.94	60.06	60.76	63.13	65.61	71.29	74.18	77.14	79.43	78.20
	WRN-50-2	60.14	59.52	63.12	63.55	67.51	71.30	75.11	78.07	80.61	79.64
	WRN-50-4	57.68	72.88	73.79	74.06	75.68	76.25	77.23	78.73	81.08	79.94
Caltech-101	ResNet-18	86.30	86.28	87.32	87.59	89.49	88.12	88.65	86.84	83.11	78.69
	ResNet-50	88.95	90.22	89.79	90.26	90.54	90.48	91.04	91.07	87.43	84.35
	WRN-50-2	90.12	89.97	89.85	90.67	90.40	91.25	91.80	90.84	88.62	86.83
	WRN-50-4	89.34	92.20	91.96	92.44	92.63	92.76	92.32	92.32	89.10	88.43
Caltech-256	ResNet-18	77.58	78.09	77.87	78.40	77.57	76.66	75.69	74.61	69.19	64.46
	ResNet-50	82.21	82.31	82.23	82.51	82.10	81.50	81.21	79.72	75.42	71.07
	WRN-50-2	82.78	82.94	83.34	83.04	83.17	82.74	81.89	81.26	77.48	74.38
	WRN-50-4	82.68	85.07	85.08	84.88	84.75	84.24	83.62	83.27	79.24	76.75
Cars	ResNet-18	43.34	44.43	43.92	45.53	45.59	43.00	43.40	40.45	33.55	28.86
	ResNet-50	44.52	44.98	43.56	46.74	46.15	45.04	47.28	45.58	40.34	36.32
	WRN-50-2	44.63	42.67	44.92	44.36	45.32	46.83	46.10	45.81	41.35	37.62
	WRN-50-4	43.01	45.86	50.39	50.67	50.22	49.46	38.77	48.73	43.26	40.68
DTD	ResNet-18	66.84	66.01	65.07	63.90	63.51	62.78	61.99	58.94	53.55	51.88
	ResNet-50	68.14	70.21	67.52	68.16	68.21	66.03	65.21	63.97	59.59	57.68
	WRN-50-2	70.09	67.89	68.87	67.55	67.11	67.70	66.61	64.20	59.95	57.29
	WRN-50-4	67.85	69.95	70.37	69.70	68.42	67.45	67.22	65.69	60.67	58.78
Flowers	ResNet-18	90.80	90.76	90.88	90.65	91.26	90.05	88.99	87.64	83.72	80.20
	ResNet-50	91.28	90.43	90.16	91.12	91.26	90.50	90.52	89.70	86.49	83.85
	WRN-50-2	91.90	90.86	90.97	90.26	90.46	90.79	89.39	89.79	86.73	84.31
	WRN-50-4	90.67	91.84	91.37	91.32	91.12	90.63	90.23	89.89	86.96	85.35
Food	ResNet-18	59.96	59.67	60.20	60.17	59.59	59.04	57.97	56.42	51.49	48.03
	ResNet-50	65.49	65.39	63.59	65.95	65.02	64.41	64.23	62.86	58.90	55.77
	WRN-50-2	65.80	64.06	65.50	64.00	65.14	65.73	63.44	63.05	59.19	56.13
	WRN-50-4	65.04	69.26	68.69	68.50	68.15	67.03	66.32	65.53	60.48	57.98
Pets	ResNet-18	89.55	89.03	88.67	88.54	88.87	87.80	86.73	83.61	76.29	69.48
	ResNet-50	90.92	90.93	91.27	91.16	91.05	90.48	89.57	87.84	82.54	76.69
	WRN-50-2	91.81	91.69	91.83	91.85	90.98	91.61	90.46	89.31	84.51	79.80
	WRN-50-4	91.83	91.82	92.05	91.70	91.54	91.32	90.85	90.23	86.75	83.83
SUN397	ResNet-18	51.74	51.31	51.32	50.92	50.50	49.30	49.25	47.99	45.19	42.24
	ResNet-50	54.69	54.82	53.48	54.15	53.45	52.23	53.43	51.88	49.30	46.84
	WRN-50-2	55.57	54.35	54.53	53.90	54.31	53.96	53.03	53.09	50.16	47.86
	WRN-50-4	55.92	58.75	58.45	58.34	57.56	56.75	55.99	55.74	52.21	49.91

G.2 Full-network transfer to classification tasks (Fig. 3)

Table 9: Full-network transfer for various standard and robust ImageNet models and datasets.

Dataset	Model	Transfer Accuracy (%)									
		Robustness parameter ϵ									
		0.00	0.01	0.03	0.05	0.10	0.25	0.50	1.00	3.00	5.00
Aircraft	ResNet-18	80.70	80.32	79.99	80.06	79.30	78.74	77.69	77.90	77.41	77.26
	ResNet-50	85.62	85.62	85.61	85.72	84.73	84.65	84.77	84.16	83.66	83.77
	WRN-50-2	86.57	86.08	85.81	86.06	85.17	85.60	85.55	84.93	83.60	83.80
	WRN-50-4	85.19	85.98	86.10	86.11	86.24	85.88	85.67	85.04	84.81	85.43
Birdsnap	ResNet-18	67.71	67.96	67.58	67.86	67.80	67.63	67.10	66.62	65.80	64.81
	ResNet-50	73.38	73.52	73.39	73.33	73.22	73.48	73.21	72.65	71.71	71.05
	WRN-50-2	74.87	74.98	74.85	74.93	74.75	74.80	74.79	74.18	73.15	72.64
	WRN-50-4	75.71	76.55	76.47	76.14	76.18	76.29	76.20	76.06	75.25	74.40
CIFAR-10	ResNet-18	96.41	96.30	96.46	96.47	96.67	96.83	97.04	96.96	97.09	96.92
	ResNet-50	97.20	97.26	97.52	97.43	97.59	97.71	97.86	98.05	98.15	98.15
	WRN-50-2	97.43	97.60	97.72	97.69	97.86	98.02	98.09	98.29	98.47	98.44
	WRN-50-4	97.63	98.51	98.52	98.59	98.62	98.52	98.55	98.68	98.57	98.53
CIFAR-100	ResNet-18	82.13	82.36	82.82	82.71	83.14	83.85	84.19	84.25	83.65	83.36
	ResNet-50	85.02	85.20	85.45	85.44	85.80	86.31	86.64	87.10	87.26	86.43
	WRN-50-2	85.47	85.94	85.95	86.15	86.47	87.31	87.52	88.13	87.98	87.54
	WRN-50-4	85.99	88.70	88.61	88.72	88.72	88.75	88.80	89.04	88.83	88.62
Caltech-101	ResNet-18	92.04	90.81	91.28	91.29	89.75	90.73	91.12	89.60	86.39	86.95
	ResNet-50	93.42	93.82	94.53	94.18	94.27	94.24	93.79	93.13	91.79	89.97
	WRN-50-2	94.29	94.43	94.13	94.49	94.48	94.92	95.29	94.28	93.08	91.89
	WRN-50-4	94.76	95.60	95.32	95.62	95.30	95.45	95.23	95.19	94.49	93.25
Caltech-256	ResNet-18	79.80	80.00	79.45	80.10	79.23	79.07	78.86	76.71	74.55	71.57
	ResNet-50	84.19	84.30	84.37	84.54	84.04	84.12	84.02	82.85	80.15	77.81
	WRN-50-2	85.56	85.65	86.04	86.26	85.91	85.67	85.80	85.19	82.97	81.04
	WRN-50-4	86.56	87.53	87.54	87.62	87.62	87.54	87.38	87.31	86.09	84.08
Cars	ResNet-18	88.05	87.80	87.53	87.90	87.45	87.10	86.94	86.35	85.56	85.26
	ResNet-50	90.97	90.65	90.83	90.52	90.23	90.47	90.59	90.39	89.85	89.28
	WRN-50-2	91.52	91.47	91.27	91.20	91.04	91.06	91.05	90.73	90.16	90.27
	WRN-50-4	91.39	91.09	91.14	91.05	91.10	91.03	91.12	91.01	90.63	90.34
DTD	ResNet-18	72.11	71.37	71.54	70.73	70.37	70.07	68.46	67.73	65.27	65.41
	ResNet-50	75.09	74.77	74.54	74.02	73.56	72.89	73.19	71.90	70.00	70.02
	WRN-50-2	75.51	75.94	75.41	74.98	74.65	74.57	74.95	73.05	72.20	71.31
	WRN-50-4	75.80	76.65	76.93	76.47	76.44	76.54	75.57	75.37	73.16	72.84
Flowers	ResNet-18	95.79	95.31	95.20	95.44	95.49	94.82	94.53	93.86	92.36	91.42
	ResNet-50	96.65	96.81	96.50	96.53	96.20	96.25	95.99	95.68	94.62	94.20
	WRN-50-2	97.04	97.21	96.71	96.74	96.63	96.35	96.07	95.69	94.98	94.67
	WRN-50-4	97.01	96.52	96.59	96.53	96.53	96.38	96.28	96.33	95.50	94.92
Food	ResNet-18	84.01	83.95	83.74	83.69	83.89	83.78	83.60	83.36	83.23	82.91
	ResNet-50	87.57	87.42	87.45	87.46	87.40	87.45	87.44	87.06	86.97	86.82
	WRN-50-2	88.27	88.26	88.10	88.30	87.99	88.25	87.97	87.96	87.75	87.58
	WRN-50-4	88.64	89.09	89.00	89.08	89.12	88.95	88.94	88.98	88.46	88.39
Pets	ResNet-18	91.94	91.81	90.79	91.59	91.09	90.46	89.49	87.96	84.83	82.41
	ResNet-50	93.49	93.61	93.50	93.59	93.34	93.06	92.50	92.09	89.41	88.13
	WRN-50-2	93.96	94.05	93.98	94.23	94.02	94.02	93.39	93.07	90.80	89.76
	WRN-50-4	94.20	94.53	94.40	94.38	94.27	94.11	94.02	93.79	92.91	91.94
SUN397	ResNet-18	59.41	58.98	59.19	58.83	58.61	58.29	58.14	56.97	55.14	54.23
	ResNet-50	62.24	62.12	61.93	61.89	61.50	61.64	61.28	60.66	59.27	58.40
	WRN-50-2	63.02	63.28	63.16	63.18	62.90	63.36	62.53	62.23	61.16	60.47
	WRN-50-4	63.72	64.89	64.81	64.71	64.74	64.53	64.49	64.74	62.86	62.14

G.3 Unifying dataset scale

G.3.1 Fixed-feature (cf. Fig. 7 & 13)

Table 10: **Fixed-feature** transfer on 32x32 downsampled datasets.

		Transfer Accuracy (%)									
Dataset	Model	Robustness parameter ε									
		0.00	0.01	0.03	0.05	0.10	0.25	0.50	1.00	3.00	5.00
Aircraft	ResNet-18	17.64	18.72	19.11	20.34	21.69	23.19	24.93	25.44	27.15	26.01
	ResNet-50	15.87	17.04	17.82	18.48	20.19	22.44	24.12	25.89	28.59	28.35
Birdsnap	ResNet-18	14.76	14.04	15.80	16.23	17.77	18.60	19.75	20.16	19.15	16.72
	ResNet-50	13.85	14.12	14.67	15.42	16.94	19.67	21.74	23.08	22.98	20.70
CIFAR-10	ResNet-18	76.02	74.36	79.48	79.71	82.97	86.62	88.47	90.29	91.64	90.36
	ResNet-50	79.63	82.18	82.15	83.88	85.41	89.35	91.13	92.89	94.81	94.23
CIFAR-100	ResNet-18	54.61	54.03	58.77	58.74	63.64	68.10	70.66	72.74	74.01	72.08
	ResNet-50	58.01	60.17	60.87	63.24	65.73	71.32	74.19	77.17	79.50	78.27
Caltech-101	ResNet-18	52.88	54.20	62.56	60.43	65.31	69.39	69.08	72.11	73.02	70.04
	ResNet-50	56.55	59.32	60.45	61.08	63.76	69.80	73.11	76.89	78.86	77.43
Caltech-256	ResNet-18	40.60	40.83	45.02	45.88	49.96	51.08	51.36	54.13	53.79	51.87
	ResNet-50	42.73	45.11	45.65	47.52	49.61	53.63	56.12	58.93	59.79	58.67
Cars	ResNet-18	13.88	14.18	16.14	16.95	19.61	20.20	20.33	21.70	20.89	18.75
	ResNet-50	13.16	13.89	13.68	16.84	17.07	19.40	21.88	23.19	24.19	23.37
DTD	ResNet-18	35.96	36.33	40.27	37.87	39.79	39.31	39.73	40.05	39.10	39.41
	ResNet-50	41.28	40.37	41.06	42.13	41.22	43.56	44.10	43.78	43.83	44.26
Flowers	ResNet-18	64.81	65.75	70.01	70.57	72.71	74.46	74.19	76.06	74.23	71.52
	ResNet-50	66.65	68.49	68.24	71.03	73.12	75.83	76.52	77.23	78.31	75.71
Food	ResNet-18	31.58	32.98	35.98	36.42	38.46	39.35	39.56	41.22	40.17	38.35
	ResNet-50	36.46	36.82	36.37	39.85	40.91	43.08	44.88	46.16	46.45	44.44
Pets	ResNet-18	48.74	46.98	56.87	56.25	61.92	62.45	63.39	66.20	62.23	57.15
	ResNet-50	53.98	54.10	58.55	53.57	59.58	67.35	69.31	70.16	69.43	64.37
SUN397	ResNet-18	23.16	24.35	25.34	25.94	27.60	28.00	28.12	30.19	30.91	30.41
	ResNet-50	23.62	25.60	24.64	27.30	27.56	29.24	31.36	32.37	33.90	33.58

G.3.2 Full-network (cf. Fig. 14)

Table 11: **Full-network** transfer on 32x32 downsampled datasets.

Dataset	Model	Transfer Accuracy (%)									
		Robustness parameter ϵ									
		0.00	0.01	0.03	0.05	0.10	0.25	0.50	1.00	3.00	5.00
Aircraft	ResNet-18	58.24	58.27	59.29	58.96	60.28	60.22	59.83	60.88	61.78	60.88
	ResNet-50	65.77	65.20	65.62	66.22	65.68	67.12	66.49	66.04	68.02	67.12
Birdsnap	ResNet-18	46.32	46.65	45.94	46.55	46.26	46.57	46.26	46.80	45.23	44.76
	ResNet-50	52.28	51.98	51.77	52.11	52.20	52.42	52.58	51.77	51.72	51.29
CIFAR-10	ResNet-18	96.50	96.38	96.51	96.62	96.78	96.86	97.12	97.04	97.14	97.05
	ResNet-50	97.30	97.32	97.54	97.56	97.62	97.79	97.98	98.10	98.27	98.16
CIFAR-100	ResNet-18	82.36	82.57	82.89	82.92	83.31	83.90	84.30	84.41	83.77	83.47
	ResNet-50	85.15	85.37	85.64	85.68	85.92	86.45	86.81	87.32	87.45	86.60
Caltech-101	ResNet-18	79.33	78.64	78.95	79.94	79.70	81.13	81.55	83.13	82.30	79.80
	ResNet-50	82.18	83.05	84.50	84.72	84.74	85.62	86.12	86.61	85.88	85.20
Caltech-256	ResNet-18	63.32	64.45	64.02	64.55	65.18	66.00	66.52	65.41	64.35	63.03
	ResNet-50	68.02	68.09	68.63	69.42	68.96	70.10	70.60	70.66	69.90	68.94
Cars	ResNet-18	68.83	68.55	68.62	68.98	69.53	69.28	69.68	69.27	67.99	67.42
	ResNet-50	74.84	74.95	74.13	75.23	74.61	75.29	75.92	75.51	75.19	74.65
DTD	ResNet-18	49.57	48.40	50.43	48.88	49.20	50.27	50.00	50.74	50.32	50.74
	ResNet-50	50.69	52.50	51.01	51.60	51.65	52.66	54.15	52.71	54.26	55.53
Flowers	ResNet-18	85.96	86.05	86.02	86.03	86.40	86.25	86.41	86.03	85.33	84.60
	ResNet-50	88.75	88.30	88.57	88.27	88.81	88.69	88.70	88.37	88.67	87.83
Food	ResNet-18	71.77	71.83	71.73	71.64	71.60	71.64	72.10	71.63	71.78	71.37
	ResNet-50	75.83	75.19	75.52	75.51	75.50	75.37	76.11	75.91	75.76	75.61
Pets	ResNet-18	76.32	77.35	77.71	78.05	78.63	78.70	78.75	77.82	75.72	72.21
	ResNet-50	82.34	81.95	82.64	82.24	82.52	83.59	83.57	83.72	81.87	79.33
SUN397	ResNet-18	42.81	42.65	43.40	43.35	44.01	44.20	44.51	44.61	44.31	43.54
	ResNet-50	44.64	44.95	44.73	45.09	45.44	45.93	46.74	47.24	47.47	47.15