

Is Pessimism Provably Efficient for Offline RL?

Ying Jin^{*†}Zhuoran Yang^{*‡}Zhaoran Wang^{*§}

Abstract

We study offline reinforcement learning (RL), which aims to learn an optimal policy based on a dataset collected a priori. Due to the lack of further interactions with the environment, offline RL suffers from the insufficient coverage of the dataset, which eludes most existing theoretical analysis. In this paper, we propose a pessimistic variant of the value iteration algorithm (PEVI), which incorporates an uncertainty quantifier as the penalty function. Such a penalty function simply flips the sign of the bonus function for promoting exploration in online RL, which makes it easily implementable and compatible with general function approximators.

Without assuming the sufficient coverage of the dataset (e.g., finite concentrability coefficients or uniformly lower bounded densities of visitation measures), we establish a data-dependent upper bound on the suboptimality of PEVI for general Markov decision processes (MDPs). When specialized to linear MDPs, it matches the information-theoretic lower bound up to multiplicative factors of the dimension and horizon. In other words, pessimism is not only provably efficient but also minimax optimal. In particular, given the dataset, the learned policy serves as the “best effort” among all policies, as no other policies can do better. Our theoretical analysis identifies the critical role of pessimism in eliminating a notion of spurious correlation, which arises from the “irrelevant” trajectories that are less covered by the dataset and not informative for the optimal policy.

1 Introduction

The empirical success of online (deep) reinforcement learning (RL) (Mnih et al., 2015; Silver et al., 2016, 2017; Vinyals et al., 2017) relies on two ingredients: (i) expressive function approximators, e.g., deep neural networks (LeCun et al., 2015), which approximate policies and values, and (ii) efficient data generators, e.g., game engines (Bellemare et al., 2013) and physics simulators (Todorov et al.,

^{*}Equal contribution. This work is done when Z. Yang and Z. Wang are participating in the Theory of Reinforcement Learning Program at the Simons Institute for the Theory of Computing.

[†]Stanford University. Email: ying531@stanford.edu.

[‡]Princeton University. Email: zy6@princeton.edu.

[§]Northwestern University. Email: zhaoranwang@gmail.com.

2012), which serve as environments. In particular, learning the deep neural network in an online manner often necessitates millions to billions of interactions with the environment. Due to such a barrier of sample complexity, it remains notably more challenging to apply online RL in critical domains, e.g., precision medicine (Gottesman et al., 2019) and autonomous driving (Shalev-Shwartz et al., 2016), where interactive data collecting processes can be costly and risky. To this end, we study offline RL in this paper, which aims to learn an optimal policy based on a dataset collected a priori without further interactions with the environment. Such datasets are abundantly available in various domains, e.g., electronic health records for precision medicine (Chakraborty and Murphy, 2014) and human driving trajectories for autonomous driving (Sun et al., 2020).

In comparison with online RL (Lattimore and Szepesvári, 2020; Agarwal et al., 2020a), offline RL remains even less understood in theory (Lange et al., 2012; Levine et al., 2020), which hinders principled developments of trustworthy algorithms in practice. In particular, as active interactions with the environment are infeasible, it remains unclear how to maximally exploit the dataset without further exploration. Due to such a lack of continuing exploration, which plays a key role in online RL, any algorithm for offline RL possibly suffers from the insufficient coverage of the dataset (Wang et al., 2020a). Specifically, as illustrated in Section 3, two challenges arise:

- (i) the intrinsic uncertainty, that is, the dataset possibly fails to cover the trajectory induced by the optimal policy, which however carries the essential information, and
- (ii) the spurious correlation, that is, the dataset possibly happens to cover a trajectory unrelated to the optimal policy, which by chance induces a large cumulative reward and hence misleads the learned policy.

See Figures 1 and 2 for illustrations. As the dataset is collected a priori, which is often beyond the control of the learner, any assumption on the sufficient coverage of the dataset possibly fails to hold in practice (Fujimoto et al., 2019; Agarwal et al., 2020b; Fu et al., 2020a; Gulcehre et al., 2020).

In this paper, we aim to answer the following question:

*Is it possible to design a provably efficient algorithm for offline RL
under minimal assumptions on the dataset?*

To this end, we propose a pessimistic value iteration algorithm (PEVI), which incorporates a penalty function (pessimism) into the value iteration algorithm (Sutton and Barto, 2018; Szepesvári, 2010). Here the penalty function simply flips the sign of the bonus function (optimism) for promoting exploration in online RL (Jaksch et al., 2010; Azar et al., 2017), which enables a straightforward implementation of PEVI in practice. Specifically, we study the episodic setting of the Markov decision process (MDP). Our theoretical contribution is fourfold:

- (i) We decompose the suboptimality of any algorithm for offline RL into three sources, namely the intrinsic uncertainty, spurious correlation, and optimization error. In particular, we identify the key role of the spurious correlation, even in the multi-armed bandit (MAB), a special case of the MDP.
- (ii) For any general MDP, we establish the suboptimality of PEVI under a sufficient condition on the penalty function. In particular, we prove as long as the penalty function is an uncertainty quantifier, which is defined in Section 4.1, pessimism allows PEVI to eliminate the spurious correlation from its suboptimality.
- (iii) For the linear MDP (Yang and Wang, 2019; Jin et al., 2020), we instantiate PEVI by specifying the penalty function. In particular, we prove such a penalty function is an uncertainty quantifier, which verifies the sufficient condition imposed in (ii). Correspondingly, we establish the suboptimality of PEVI for the linear MDP.
- (iv) We prove PEVI is minimax optimal for the linear MDP up to multiplicative factors of the dimension and horizon. In particular, we prove the intrinsic uncertainty identified in (i) is impossible to eliminate, as it arises from the information-theoretic lower bound. Moreover, such a fundamental limit certifies an oracle property of PEVI, which is defined in Section 4.2. Specifically, the suboptimality of PEVI only depends on how well the dataset covers the trajectory induced by the optimal policy, which carries the essential information, rather than any trajectory unrelated to the optimal policy, which causes the spurious correlation.

Throughout our theory, we only require an assumption on the compliance of the dataset, that is, the data collecting process is carried out in the underlying MDP of interest. Such an assumption is minimal. In comparison with existing literature, we require no assumptions on the sufficient coverage of the dataset, e.g., finite concentrability coefficients (Chen and Jiang, 2019) and uniformly lower bounded densities of visitation measures (Yin et al., 2020), which often fail to hold in practice. Meanwhile, we impose no restrictions on the affinity between the learned policy and behavior policy (for collecting data) (Liu et al., 2020), which is often employed as a regularizer (or equivalently, a constraint) in existing literature. See Section 1.1 for a detailed discussion.

1.1 Related Works

Our work adds to the vast body of existing literature on offline RL (also known as batch RL) (Lange et al., 2012; Levine et al., 2020), where a learner only has access to a dataset collected a priori. Existing literature studies two tasks: (i) offline policy evaluation, which estimates the expected cumulative reward or (action- and state-) value functions of a target policy, and (ii) offline policy optimization, which learns an optimal policy that maximizes the expected cumulative reward. Note

that (i) is also known as off-policy policy evaluation, which can be adapted to handle the online setting. Also, note that the target policy in (i) is known, while the optimal policy in (ii) is unknown. As (ii) is more challenging than (i), various algorithms for solving (ii), especially the value-based approaches, can be adapted to solve (i). Although we focus on (ii), we discuss the existing works on (i) and (ii) together.

A key challenge of offline RL is the insufficient coverage of the dataset (Wang et al., 2020a), which arises from the lack of continuing exploration (Szepesvári, 2010). In particular, the trajectories given in the dataset and those induced by the optimal policy (or the target policy) possibly have different distributions, which is also known as distribution shift (Levine et al., 2020). As a result, intertwined with overparameterized function approximators, e.g., deep neural networks, offline RL possibly suffers from the extrapolation error (Fujimoto et al., 2019), which is large on the states and actions that are less covered by the dataset. Such an extrapolation error further propagates through each iteration of the algorithm for offline RL, as it often relies on bootstrapping (Sutton and Barto, 2018).

To address such a challenge, the recent works (Fujimoto et al., 2019; Laroche et al., 2019; Jaques et al., 2019; Wu et al., 2019; Kumar et al., 2019, 2020; Agarwal et al., 2020b; Yu et al., 2020; Kidambi et al., 2020; Wang et al., 2020c; Siegel et al., 2020; Nair et al., 2020; Liu et al., 2020) demonstrate the empirical success of various algorithms, which fall into two (possibly overlapping) categories: (i) regularized policy-based approaches and (ii) pessimistic value-based approaches. Specifically, (i) regularizes (or equivalently, constrains) the policy to avoid visiting the states and actions that are less covered by the dataset, while (ii) penalizes the (action- or state-) value function on such states and actions.

On the other hand, the empirical success of offline RL mostly eludes existing theory. Specifically, the existing works require various assumptions on the sufficient coverage of the dataset, which is also known as data diversity (Levine et al., 2020). For example, offline policy evaluation often requires the visitation measure of the behavior policy to be lower bounded uniformly over the state-action space. An alternative assumption requires the ratio between the visitation measure of the target policy and that of the behavior policy to be upper bounded uniformly over the state-action space. See, e.g., Jiang and Li (2016); Thomas and Brunskill (2016); Farajtabar et al. (2018); Liu et al. (2018); Xie et al. (2019); Nachum et al. (2019a,b); Tang et al. (2019); Kallus and Uehara (2019, 2020); Jiang and Huang (2020); Uehara et al. (2020); Duan et al. (2020); Yin and Wang (2020); Yin et al. (2020); Nachum and Dai (2020); Yang et al. (2020a); Zhang et al. (2020b) and the references therein. As another example, offline policy optimization often requires the concentrability coefficient to be upper bounded, whose definition mostly involves taking the supremum of a similarly defined ratio over the state-action space. See, e.g., Antos et al. (2007, 2008); Munos and Szepesvári (2008); Farahmand et al. (2010, 2016); Scherrer et al. (2015); Chen and Jiang (2019); Liu et al. (2019);

Wang et al. (2019); Fu et al. (2020b); Fan et al. (2020); Xie and Jiang (2020a,b); Liao et al. (2020); Zhang et al. (2020a) and the references therein.

In practice, such assumptions on the sufficient coverage of the dataset often fail to hold (Fujimoto et al., 2019; Agarwal et al., 2020b; Fu et al., 2020a; Gulcehre et al., 2020), which possibly invalidates existing theory. For example, even for the MAB, a special case of the MDP, it remains unclear how to maximally exploit the dataset without such assumptions, e.g., when each action (arm) is taken a different number of times. As illustrated in Section 3, assuming there exists a suboptimal action that is less covered by the dataset, it possibly interferes with the learned policy via the spurious correlation. As a result, it remains unclear how to learn a policy whose suboptimality only depends on how well the dataset covers the optimal action instead of the suboptimal ones. In contrast, our work proves that pessimism resolves such a challenge by eliminating the spurious correlation, which enables exploiting the essential information, e.g., the observations of the optimal action in the dataset, in a minimax optimal manner. Although the optimal action is unknown, our algorithm adapts to identify the essential information in the dataset via the oracle property. See Section 4 for a detailed discussion.

Our work adds to the recent works on pessimism (Yu et al., 2020; Kidambi et al., 2020; Kumar et al., 2020; Liu et al., 2020; Buckman et al., 2020). Specifically, Yu et al. (2020); Kidambi et al. (2020) propose a pessimistic model-based approach, while Kumar et al. (2020) propose a pessimistic value-based approach, both of which demonstrate empirical successes. From a theoretical perspective, Liu et al. (2020) propose a regularized (and pessimistic) variant of the fitted Q-iteration algorithm (Antos et al., 2007, 2008; Munos and Szepesvári, 2008), which attains the optimal policy within a restricted class of policies without assuming the sufficient coverage of the dataset. In contrast, our work imposes no restrictions on the affinity between the learned policy and behavior policy. In particular, our algorithm attains the information-theoretic lower bound for the linear MDP (Yang and Wang, 2019; Jin et al., 2020) (up to multiplicative factors of the dimension and horizon), which implies that given the dataset, the learned policy serves as the “best effort” among all policies since no other can do better. From another theoretical perspective, Buckman et al. (2020) characterize the importance of pessimism, especially when the assumption on the sufficient coverage of the dataset fails to hold. In contrast, we propose a principled framework for achieving pessimism via the notion of uncertainty quantifier, which serves as a sufficient condition for general function approximators. See Section 4 for a detailed discussion. Moreover, we instantiate such a framework for the linear MDP and establish its minimax optimality via the information-theoretic lower bound. In other words, our work complements Buckman et al. (2020) by proving that pessimism is not only “important” but also optimal in the sense of information theory.

2 Preliminaries

In this section, we first introduce the episodic Markov decision process (MDP) and the corresponding performance metric. Then we introduce the offline setting and the corresponding data collecting process.

2.1 Episodic MDP and Performance Metric

We consider an episodic MDP $(\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$ with the state space \mathcal{S} , action space \mathcal{A} , horizon H , transition kernel $\mathcal{P} = \{\mathcal{P}_h\}_{h=1}^H$, and reward function $r = \{r_h\}_{h=1}^H$. We assume the reward function is bounded, that is, $r_h \in [0, 1]$ for all $h \in [H]$. For any policy $\pi = \{\pi_h\}_{h=1}^H$, we define the (state-)value function $V_h^\pi : \mathcal{S} \rightarrow \mathbb{R}$ at each step $h \in [H]$ as

$$V_h^\pi(x) = \mathbb{E}_\pi \left[\sum_{i=h}^H r_i(s_i, a_i) \mid s_h = x \right] \quad (2.1)$$

and the action-value function (Q-function) $Q_h^\pi : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ at each step $h \in [H]$ as

$$Q_h^\pi(x, a) = \mathbb{E}_\pi \left[\sum_{i=h}^H r_i(s_i, a_i) \mid s_h = x, a_h = a \right]. \quad (2.2)$$

Here the expectation \mathbb{E}_π in Equations (2.1) and (2.2) is taken with respect to the randomness of the trajectory induced by π , which is obtained by taking the action $a_i \sim \pi_i(\cdot \mid s_i)$ at the state s_i and observing the next state $s_{i+1} \sim \mathcal{P}_i(\cdot \mid s_i, a_i)$ at each step $i \in [H]$. Meanwhile, we fix $s_h = x \in \mathcal{S}$ in Equation (2.1) and $(s_h, a_h) = (x, a) \in \mathcal{S} \times \mathcal{A}$ in Equation (2.2). By the definition in Equations (2.1) and (2.2), we have the Bellman equation

$$V_h^\pi(x) = \langle Q_h^\pi(x, \cdot), \pi_h(\cdot \mid x) \rangle_{\mathcal{A}}, \quad Q_h^\pi(x, a) = \mathbb{E} [r_h(s_h, a_h) + V_{h+1}^\pi(s_{h+1}) \mid s_h = x, a_h = a],$$

where $\langle \cdot, \cdot \rangle_{\mathcal{A}}$ is the inner product over \mathcal{A} , while \mathbb{E} is taken with respect to the randomness of the immediate reward $r_h(s_h, a_h)$ and next state s_{h+1} . For any function $f : \mathcal{S} \rightarrow \mathbb{R}$, we define the transition operator at each step $h \in [H]$ as

$$(\mathbb{P}_h f)(x, a) = \mathbb{E} [f(s_{h+1}) \mid s_h = x, a_h = a] \quad (2.3)$$

and the Bellman operator at each step $h \in [H]$ as

$$\begin{aligned} (\mathbb{B}_h f)(x, a) &= \mathbb{E} [r_h(s_h, a_h) + f(s_{h+1}) \mid s_h = x, a_h = a] \\ &= \mathbb{E} [r_h(s_h, a_h) \mid s_h = x, a_h = a] + (\mathbb{P}_h f)(x, a). \end{aligned} \quad (2.4)$$

For the episodic MDP $(\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$, we use π^* , Q_h^* , and V_h^* to denote the optimal policy, optimal Q-function, and optimal value function, respectively. We have $V_{H+1}^* = 0$ and the Bellman optimality equation

$$V_h^*(x) = \max_{a \in \mathcal{A}} Q_h^*(x, a), \quad Q_h^*(x, a) = (\mathbb{B}_h V_{h+1}^*)(x, a). \quad (2.5)$$

Meanwhile, the optimal policy π^* is specified by

$$\pi_h^*(\cdot | x) = \arg \max_{\pi_h} \langle Q_h^*(x, \cdot), \pi_h(\cdot | x) \rangle_{\mathcal{A}}, \quad V_h^*(x) = \langle Q_h^*(x, \cdot), \pi_h^*(\cdot | x) \rangle_{\mathcal{A}},$$

where the maximum is taken over all functions mapping from \mathcal{S} to distributions over \mathcal{A} . We aim to learn a policy that maximizes the expected cumulative reward. Correspondingly, we define the performance metric as

$$\text{SubOpt}(\pi; x) = V_1^{\pi^*}(x) - V_1^{\pi}(x), \quad (2.6)$$

which is the suboptimality of the policy π given the initial state $s_1 = x$.

2.2 Offline Data Collecting Process

We consider the offline setting, that is, a learner only has access to a dataset \mathcal{D} consisting of K trajectories $\{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$, which is collected a priori by an experimenter. In other words, at each step $h \in [H]$ of each trajectory $\tau \in [K]$, the experimenter takes the action a_h^τ at the state x_h^τ , receives the reward $r_h^\tau = r_h(x_h^\tau, a_h^\tau)$, and observes the next state $x_{h+1}^\tau \sim \mathcal{P}_h(\cdot | s_h = x_h^\tau, a_h = a_h^\tau)$. Here a_h^τ can be arbitrarily chosen, while r_h and \mathcal{P}_h are the reward function and transition kernel of an underlying MDP. We define the compliance of such a dataset with the underlying MDP as follows.

Definition 2.1 (Compliance of Dataset). For a dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$, let $\mathbb{P}_{\mathcal{D}}$ be the joint distribution of the data collecting process. We say \mathcal{D} is compliant with an underlying MDP $(\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$ if

$$\begin{aligned} \mathbb{P}_{\mathcal{D}}(r_h^\tau = r', x_{h+1}^\tau = x' | \{(x_h^j, a_h^j)\}_{j=1}^\tau, \{(r_h^j, x_{h+1}^j)\}_{j=1}^{\tau-1}) \\ = \mathbb{P}(r_h(s_h, a_h) = r', s_{h+1} = x' | s_h = x_h^\tau, a_h = a_h^\tau) \end{aligned} \quad (2.7)$$

for all $r' \in [0, 1]$ and $x' \in \mathcal{S}$ at each step $h \in [H]$ of each trajectory $\tau \in [K]$. Here \mathbb{P} on the right-hand side of Equation (2.7) is taken with respect to the underlying MDP.

Equation (2.7) implies the following two conditions on $\mathbb{P}_{\mathcal{D}}$ hold simultaneously: (i) at each step $h \in [H]$ of each trajectory $\tau \in [K]$, (r_h^τ, x_{h+1}^τ) only depends on $\{(x_h^j, a_h^j)\}_{j=1}^\tau \cup \{(r_h^j, x_{h+1}^j)\}_{j=1}^{\tau-1}$ via (x_h^τ, a_h^τ) , and (ii) conditioning on (x_h^τ, a_h^τ) , (r_h^τ, x_{h+1}^τ) is generated by the reward function and transition kernel of the underlying MDP. Intuitively, (i) ensures \mathcal{D} possesses the Markov property. Specifically, (i) allows the K trajectories to be interdependent, that is, at each step $h \in [H]$, $\{(x_h^\tau, a_h^\tau, r_h^\tau, x_{h+1}^\tau)\}_{\tau=1}^K$ are interdependent across each trajectory $\tau \in [K]$. Meanwhile, (i) requires the randomness of $\{(x_h^j, a_h^j, r_h^j, x_{h+1}^j)\}_{j=1}^{\tau-1}$ to be fully captured by (x_h^τ, a_h^τ) when we examine the randomness of (r_h^τ, x_{h+1}^τ) .

Assumption 2.2 (Data Collecting Process). The dataset \mathcal{D} that the learner has access to is compliant with the underlying MDP $(\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$.

As a special case, Assumption 2.2 holds if the experimenter follows a fixed behavior policy. More generally, Assumption 2.2 allows a_h^τ to be arbitrarily chosen, even in an adaptive or adversarial manner, in the sense that the experimenter does not necessarily follow a fixed behavior policy. In particular, a_h^τ can be interdependent across each trajectory $\tau \in [K]$. For example, the experimenter can sequentially improve the behavior policy using any algorithm for online RL. Furthermore, Assumption 2.2 does not require the data collecting process to well explore the state space and action space.

3 What Causes Suboptimality?

In this section, we decompose the suboptimality of any policy into three sources, namely the spurious correlation, intrinsic uncertainty, and optimization error. We first analyze the MDP and then specialize the general analysis to the multi-armed bandit (MAB) for illustration.

3.1 Spurious Correlation Versus Intrinsic Uncertainty

We consider a meta-algorithm, which constructs an estimated Q-function $\hat{Q}_h : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ and an estimated value function $\hat{V}_h : \mathcal{S} \rightarrow \mathbb{R}$ based on the dataset \mathcal{D} . We define the model evaluation error at each step $h \in [H]$ as

$$\iota_h(x, a) = (\mathbb{B}_h \hat{V}_{h+1})(x, a) - \hat{Q}_h(x, a). \quad (3.1)$$

In other words, ι_h is the error that arises from estimating the Bellman operator \mathbb{B}_h defined in Equation (2.4), especially the transition operator \mathbb{P}_h therein, based on \mathcal{D} . Note that ι_h in Equation (3.1) is defined in a pointwise manner for all $(x, a) \in \mathcal{S} \times \mathcal{A}$, where \hat{V}_{h+1} and \hat{Q}_h depend on \mathcal{D} . The suboptimality of the policy $\hat{\pi}$ corresponding to \hat{V}_h and \hat{Q}_h (in the sense that $\hat{V}_h(x) = \langle \hat{Q}_h(x, \cdot), \hat{\pi}_h(\cdot | x) \rangle_{\mathcal{A}}$), which is defined in Equation (2.6), admits the following decomposition.

Lemma 3.1 (Decomposition of Suboptimality). Let $\hat{\pi} = \{\hat{\pi}_h\}_{h=1}^H$ be the policy such that $\hat{V}_h(x) = \langle \hat{Q}_h(x, \cdot), \hat{\pi}_h(\cdot | x) \rangle_{\mathcal{A}}$. For any $\hat{\pi}$ and $x \in \mathcal{S}$, we have

$$\begin{aligned} \text{SubOpt}(\hat{\pi}; x) &= - \underbrace{\sum_{h=1}^H \mathbb{E}_{\hat{\pi}}[\iota_h(s_h, a_h) | s_1 = x]}_{\text{(i): Spurious Correlation}} + \underbrace{\sum_{h=1}^H \mathbb{E}_{\pi^*}[\iota_h(s_h, a_h) | s_1 = x]}_{\text{(ii): Intrinsic Uncertainty}} \\ &\quad + \underbrace{\sum_{h=1}^H \mathbb{E}_{\pi^*}[\langle \hat{Q}_h(s_h, \cdot), \pi_h^*(\cdot | s_h) - \hat{\pi}_h(\cdot | s_h) \rangle_{\mathcal{A}} | s_1 = x]}_{\text{(iii): Optimization Error}}. \end{aligned} \quad (3.2)$$

Here $\mathbb{E}_{\hat{\pi}}$ and \mathbb{E}_{π^*} are taken with respect to the trajectories induced by $\hat{\pi}$ and π^* in the underlying MDP given the fixed functions \hat{V}_{h+1} and \hat{Q}_h , which determine ι_h .

Proof of Lemma 3.1. See Section A for a detailed proof. \square

In Equation (3.2), term (i) is more challenging to control, as $\hat{\pi}$ and ι_h simultaneously depend on \mathcal{D} and hence spuriously correlate with each other. In Section 3.2, we show such a spurious correlation can “mislead” $\hat{\pi}$, which incurs a significant suboptimality, even in the MAB. Specifically, assuming hypothetically $\hat{\pi}$ and ι_h are independent, term (i) is mean zero with respect to $\mathbb{P}_{\mathcal{D}}$ as long as ι_h is mean zero for all $(x, a) \in \mathcal{S} \times \mathcal{A}$, which only necessitates an unbiased estimator of \mathbb{B}_h in Equation (3.1), e.g., the sample average estimator in the MAB. However, as $\hat{\pi}$ and ι_h are spuriously correlated, term (i) can be rather large in expectation.

In contrast, term (ii) is less challenging to control, as π^* is intrinsic to the underlying MDP and hence does not depend on \mathcal{D} , especially the corresponding ι_h , which quantifies the uncertainty that arises from approximating $\mathbb{B}_h \hat{V}_{h+1}$. In Section 4.3, we show such an intrinsic uncertainty is impossible to eliminate, as it arises from the information-theoretic lower bound. In addition, as the optimization error, term (iii) is nonpositive as long as $\hat{\pi}$ is greedy with respect to \hat{Q}_h , that is, $\hat{\pi}_h(\cdot | x) = \arg \max_{\pi_h} \langle \hat{Q}_h(x, \cdot), \pi_h(\cdot | x) \rangle_{\mathcal{A}}$ (although Equation (3.2) holds for any $\hat{\pi}$ such that $\hat{V}_h(x) = \langle \hat{Q}_h(x, \cdot), \hat{\pi}_h(\cdot | x) \rangle_{\mathcal{A}}$).

3.2 Illustration via a Special Case: MAB

We consider the MAB, a special case of the MDP, where \mathcal{S} is a singleton, \mathcal{A} is discrete, and $H = 1$. To simplify the subsequent discussion, we assume without loss of generality

$$r(a) = \mu(a) + \epsilon, \quad \text{where } \epsilon \sim \mathcal{N}(0, 1).$$

Here $\mu(a)$ is the expected reward of each action $a \in \mathcal{A}$ and ϵ is independently drawn. For notational simplicity, we omit the dependency on $h \in [H]$ and $x \in \mathcal{S}$, as $H = 1$ and \mathcal{S} is a singleton. Based on the dataset $\mathcal{D} = \{(a^\tau, r^\tau)\}_{\tau=1}^K$, where $r^\tau = r(a^\tau)$, we consider the sample average estimator

$$\hat{\mu}(a) = \frac{1}{N(a)} \sum_{\tau=1}^K r^\tau \cdot \mathbb{1}\{a^\tau = a\}, \quad \text{where } N(a) = \sum_{\tau=1}^K \mathbb{1}\{a^\tau = a\}.$$

Note that $\hat{\mu}$ serves as the estimated Q-function. Under Assumption 2.2, we have

$$\hat{\mu}(a) \sim \mathcal{N}(\mu(a), 1/N(a)). \quad (3.3)$$

In particular, $\{\hat{\mu}(a)\}_{a \in \mathcal{A}}$ are independent across each action $a \in \mathcal{A}$ conditioning on $\{a^\tau\}_{\tau=1}^K$. We consider the policy

$$\hat{\pi}(\cdot) = \arg \max_{\pi} \langle \hat{\mu}(\cdot), \pi(\cdot) \rangle_{\mathcal{A}}, \quad (3.4)$$

which is greedy with respect to $\hat{\mu}$, as it takes the action $\arg \max_{a \in \mathcal{A}} \hat{\mu}(a)$ with probability one.

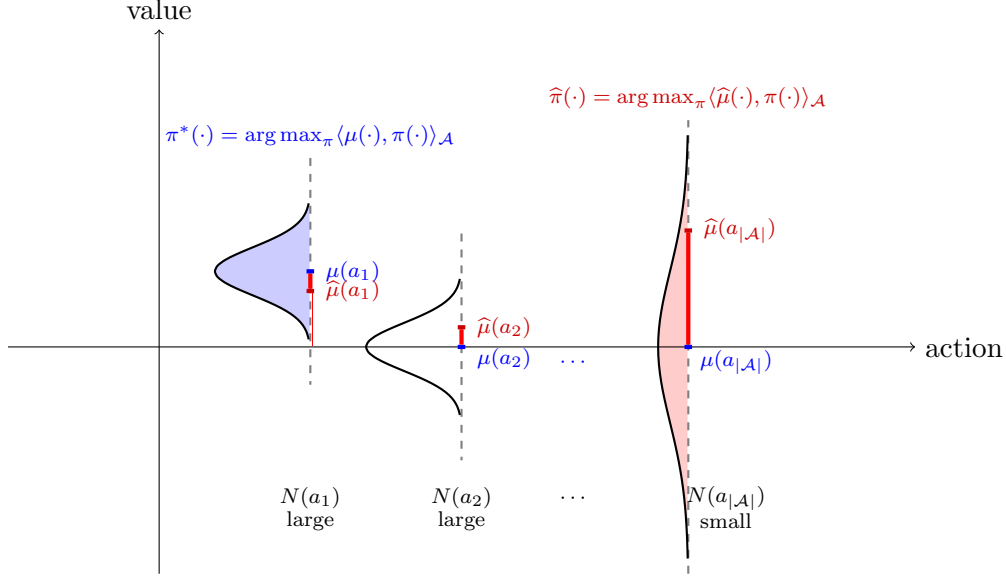


Figure 1: An illustration of the spurious correlation in the MAB, a special case of the MDP, where \mathcal{S} is a singleton, \mathcal{A} is discrete, and $H = 1$. Here $\mu(a)$ is the expected reward of each action $a \in \mathcal{A}$ and $\hat{\mu}(a)$ is its sample average estimator, which follows the Gaussian distribution in Equation (3.3). Correspondingly, $\iota(a) = \mu(a) - \hat{\mu}(a)$ is the model evaluation error. As the greedy policy with respect to $\hat{\mu}$, $\hat{\pi}$ wrongly takes the action $a_{|\mathcal{A}|} = \arg \max_{a \in \mathcal{A}} \hat{\mu}(a)$ with probability one only because $N(a_{|\mathcal{A}|})$ is relatively small, which allows $\hat{\mu}(a_{|\mathcal{A}|})$ to be rather large, even though $\mu(a_{|\mathcal{A}|}) = 0$. Due to such a spurious correlation, $\hat{\pi}$ incurs a significant suboptimality in comparison with π^* , which takes the action $a_1 = \arg \max_{a \in \mathcal{A}} \mu(a)$ with probability one.

By Equation (3.1), Lemma 3.1, and Equation (3.4), we have

$$\text{SubOpt}(\hat{\pi}; x) \leq \underbrace{-\mathbb{E}_{\hat{\pi}}[\iota(a)]}_{(i)} + \underbrace{\mathbb{E}_{\pi^*}[\iota(a)]}_{(ii)}, \quad \text{where } \iota(a) = \mu(a) - \hat{\mu}(a).$$

Note that $\iota(a)$ is mean zero with respect to $\mathbb{P}_{\mathcal{D}}$ for each action $a \in \mathcal{A}$. Therefore, assuming hypothetically $\hat{\pi}$ and ι are independent, term (i) is mean zero with respect to $\mathbb{P}_{\mathcal{D}}$. Meanwhile, as π^* and ι are independent, term (ii) is also mean zero with respect to $\mathbb{P}_{\mathcal{D}}$. However, as $\hat{\pi}$ and ι are spuriously correlated due to their dependency on \mathcal{D} , term (i) can be rather large in expectation. See Figure 1 for an illustration. Specifically, we have

$$-\mathbb{E}_{\hat{\pi}}[\iota(a)] = \langle \hat{\mu}(\cdot) - \mu(\cdot), \hat{\pi}(\cdot) \rangle_{\mathcal{A}} = \langle \hat{\mu}(\cdot) - \mu(\cdot), \arg \max_{\pi} \langle \hat{\mu}(\cdot), \pi(\cdot) \rangle_{\mathcal{A}} \rangle_{\mathcal{A}}. \quad (3.5)$$

For example, assuming $\mu(a) = 0$ for each action $a \in \mathcal{A}$, term (i) is the maximum of $|\mathcal{A}|$ Gaussians $\{N(0, 1/N(a))\}_{a \in \mathcal{A}}$, which can be rather large in expectation, especially when $N(a^\sharp)$ is relatively small for a certain action $a^\sharp \in \mathcal{A}$, e.g., $N(a^\sharp) = 1$. More generally, it is quite possible that $\hat{\pi}$ takes a certain action $a^\sharp \in \mathcal{A}$ with probability one only because $N(a^\sharp)$ is relatively small, which allows $\hat{\mu}(a^\sharp)$ to be rather large, even when $\mu(a^\sharp)$ is relatively small. Due to such a spurious correlation, $\langle \hat{\mu}(\cdot) - \mu(\cdot), \hat{\pi}(\cdot) \rangle_{\mathcal{A}} = \hat{\mu}(a^\sharp) - \mu(a^\sharp)$ in Equation (3.5) can be rather large in expectation, which incurs a significant suboptimality. More importantly, such an undesired situation can be quite common in practice, as \mathcal{D} does not necessarily have a “uniform coverage” over each action $a \in \mathcal{A}$. In other words, $N(a^\sharp)$ is often relatively small for at least a certain action $a^\sharp \in \mathcal{A}$.

Going beyond the MAB, that is, $H \geq 1$, such a spurious correlation is further exacerbated, as it is more challenging to ensure each state $x \in \mathcal{S}$ and each action $a \in \mathcal{A}$ are visited sufficiently many times in \mathcal{D} . To this end, existing literature (Antos et al., 2007, 2008; Munos and Szepesvári, 2008; Farahmand et al., 2010, 2016; Scherrer et al., 2015; Liu et al., 2018; Nachum et al., 2019a,b; Chen and Jiang, 2019; Tang et al., 2019; Kallus and Uehara, 2019, 2020; Fan et al., 2020; Xie and Jiang, 2020a,b; Jiang and Huang, 2020; Uehara et al., 2020; Duan et al., 2020; Yin et al., 2020; Qu and Wierman, 2020; Li et al., 2020; Liao et al., 2020; Nachum and Dai, 2020; Yang et al., 2020a; Zhang et al., 2020a,b) relies on various assumptions on the “uniform coverage” of \mathcal{D} , e.g., finite concentrability coefficients and uniformly lower bounded densities of visitation measures, which however often fail to hold in practice.

4 Pessimism is Provably Efficient

In this section, we present the algorithm and theory. Specifically, we introduce a penalty function to develop a pessimistic value iteration algorithm (PEVI), which simply flips the sign of the bonus function for promoting exploration in online RL (Jaksch et al., 2010; Abbasi-Yadkori et al., 2011;

Russo and Van Roy, 2013; Osband and Van Roy, 2014; Chowdhury and Gopalan, 2017; Azar et al., 2017; Jin et al., 2018, 2020; Cai et al., 2020; Yang et al., 2020b; Ayoub et al., 2020; Wang et al., 2020b). In Section 4.1, we provide a sufficient condition for eliminating the spurious correlation from the suboptimality for any general MDP. In Section 4.2, we characterize the suboptimality for the linear MDP (Yang and Wang, 2019; Jin et al., 2020) by verifying the sufficient condition in Section 4.1. In Section 4.3, we establish the minimax optimality of PEVI via the information-theoretic lower bound.

4.1 Pessimistic Value Iteration: General MDP

We consider a meta-algorithm, namely PEVI, which constructs an estimated Bellman operator $\widehat{\mathbb{B}}_h$ based on the dataset \mathcal{D} so that $\widehat{\mathbb{B}}_h \widehat{V}_{h+1} : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ approximates $\mathbb{B}_h \widehat{V}_{h+1} : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$. Here $\widehat{V}_{h+1} : \mathcal{S} \rightarrow \mathbb{R}$ is an estimated value function constructed by the meta-algorithm based on \mathcal{D} . Note that such a construction of $\widehat{\mathbb{B}}_h$ can be implicit in the sense that the meta-algorithm only relies on $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ instead of $\widehat{\mathbb{B}}_h$ itself. We define an uncertainty quantifier with the confidence parameter $\xi \in (0, 1)$ as follows. Recall that $\mathbb{P}_{\mathcal{D}}$ is the joint distribution of the data collecting process.

Definition 4.1 (ξ -Uncertainty Quantifier). We say $\{\Gamma_h\}_{h=1}^H$ ($\Gamma_h : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$) is a ξ -uncertainty quantifier with respect to $\mathbb{P}_{\mathcal{D}}$ if the event

$$\mathcal{E} = \left\{ |(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a)| \leq \Gamma_h(x, a) \text{ for all } (x, a) \in \mathcal{S} \times \mathcal{A}, h \in [H] \right\} \quad (4.1)$$

satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$.

By Equation (4.1), Γ_h quantifies the uncertainty that arises from approximating $\mathbb{B}_h \widehat{V}_{h+1}$ using $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$, which allows us to develop the meta-algorithm (Algorithm 1).

Algorithm 1 Pessimistic Value Iteration (PEVI): General MDP

- 1: Input: Dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$.
 - 2: Initialization: Set $\widehat{V}_{H+1}(\cdot) \leftarrow 0$.
 - 3: **for** step $h = H, H-1, \dots, 1$ **do**
 - 4: Construct $(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(\cdot, \cdot)$ and $\Gamma_h(\cdot, \cdot)$ based on \mathcal{D} . //Estimation & Uncertainty
 - 5: Set $\overline{Q}_h(\cdot, \cdot) \leftarrow (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(\cdot, \cdot) - \Gamma_h(\cdot, \cdot)$. //Pessimism
 - 6: Set $\widehat{Q}_h(\cdot, \cdot) \leftarrow \min\{\overline{Q}_h(\cdot, \cdot), H - h + 1\}^+$. //Truncation
 - 7: Set $\widehat{\pi}_h(\cdot | \cdot) \leftarrow \arg \max_{\pi_h} \langle \widehat{Q}_h(\cdot, \cdot), \pi_h(\cdot | \cdot) \rangle_{\mathcal{A}}$. //Optimization
 - 8: Set $\widehat{V}_h(\cdot) \leftarrow \langle \widehat{Q}_h(\cdot, \cdot), \widehat{\pi}_h(\cdot | \cdot) \rangle_{\mathcal{A}}$. //Evaluation
 - 9: **end for**
 - 10: Output: $\text{Pess}(\mathcal{D}) = \{\widehat{\pi}_h\}_{h=1}^H$.
-

The following theorem characterizes the suboptimality of Algorithm 1, which is defined in Equation (2.6).

Theorem 4.2 (Suboptimality for General MDP). Suppose $\{\Gamma_h\}_{h=1}^H$ in Algorithm 1 is a ξ -uncertainty quantifier. Under \mathcal{E} defined in Equation (4.1), which satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$, for any $x \in \mathcal{S}$, $\text{Pess}(\mathcal{D})$ in Algorithm 1 satisfies

$$\text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq 2 \sum_{h=1}^H \mathbb{E}_{\pi^*} [\Gamma_h(s_h, a_h) \mid s_1 = x]. \quad (4.2)$$

Here \mathbb{E}_{π^*} is taken with respect to the trajectory induced by π^* in the underlying MDP given the fixed function Γ_h .

Proof of Theorem 4.2. See Section 5.1 for a proof sketch. \square

Theorem 4.2 establishes a sufficient condition for eliminating the spurious correlation, which corresponds to term (i) in Equation (3.2), from the suboptimality for any general MDP. Specifically, $-\Gamma_h$ in Algorithm 1 serves as the penalty function, which ensures $-\iota_h$ in Equation (3.2) is nonpositive under \mathcal{E} defined in Equation (4.1), that is,

$$\begin{aligned} -\iota_h(x, a) &= \widehat{Q}_h(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a) \leq \overline{Q}_h(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a) \\ &= (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a) - \Gamma_h(x, a) \leq 0. \end{aligned} \quad (4.3)$$

Note that Equation (4.3) holds in a pointwise manner for all $(x, a) \in \mathcal{S} \times \mathcal{A}$. In other words, as long as Γ_h is a ξ -uncertainty quantifier, the suboptimality in Equation (4.2) only corresponds to term (ii) in Equation (3.2), which characterizes the intrinsic uncertainty. In any concrete setting, e.g., the linear MDP, it only remains to specify Γ_h and prove it is a ξ -uncertainty quantifier under Assumption 2.2. In particular, we aim to find a ξ -uncertainty quantifier that is sufficiently small to establish an adequately tight upper bound of the suboptimality in Equation (4.2). In the sequel, we show it suffices to employ the bonus function for promoting exploration in online RL.

4.2 Pessimistic Value Iteration: Linear MDP

As a concrete setting, we study the instantiation of PEVI for the linear MDP. We define the linear MDP (Yang and Wang, 2019; Jin et al., 2020) as follows, where the transition kernel and expected reward function are linear in a feature map.

Definition 4.3 (Linear MDP). We say an episodic MDP $(\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$ is a linear MDP with a known feature map $\phi : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}^d$ if there exist d unknown (signed) measures $\mu_h = (\mu_h^{(1)}, \dots, \mu_h^{(d)})$ over \mathcal{S} and an unknown vector $\theta_h \in \mathbb{R}^d$ such that

$$\mathcal{P}_h(x' \mid x, a) = \langle \phi(x, a), \mu_h(x') \rangle, \quad \mathbb{E}[r_h(s_h, a_h) \mid s_h = x, a_h = a] = \langle \phi(x, a), \theta_h \rangle \quad (4.4)$$

for all $(x, a, x') \in \mathcal{S} \times \mathcal{A} \times \mathcal{S}$ at each step $h \in [H]$. Here we assume $\|\phi(x, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$ and $\max\{\|\mu_h(\mathcal{S})\|, \|\theta_h\|\} \leq \sqrt{d}$ at each step $h \in [H]$, where with an abuse of notation, we define $\|\mu_h(\mathcal{S})\| = \int_{\mathcal{S}} \|\mu_h(x)\| dx$.

We specialize the meta-algorithm (Algorithm 1) by constructing $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$, Γ_h , and \widehat{V}_h based on \mathcal{D} , which leads to the algorithm for the linear MDP (Algorithm 2). Specifically, we construct $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ based on \mathcal{D} as follows. Recall that $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ approximates $\mathbb{B}_h \widehat{V}_{h+1}$, where \mathbb{B}_h is the Bellman operator defined in Equation (2.4), and $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$ is the dataset. We define the empirical mean squared Bellman error (MSBE) as

$$M_h(w) = \sum_{\tau=1}^K (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau) - \phi(x_h^\tau, a_h^\tau)^\top w)^2$$

at each step $h \in [H]$. Correspondingly, we set

$$(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) = \phi(x, a)^\top \widehat{w}_h, \quad \text{where } \widehat{w}_h = \arg \min_{w \in \mathbb{R}^d} M_h(w) + \lambda \cdot \|w\|_2^2 \quad (4.5)$$

at each step $h \in [H]$. Here $\lambda > 0$ is the regularization parameter. Note that \widehat{w}_h has the closed form

$$\begin{aligned} \widehat{w}_h &= \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)) \right), \\ \text{where } \Lambda_h &= \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top + \lambda \cdot I. \end{aligned} \quad (4.6)$$

Meanwhile, we construct Γ_h based on \mathcal{D} as

$$\Gamma_h(x, a) = \beta \cdot (\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a))^{1/2} \quad (4.7)$$

at each step $h \in [H]$. Here $\beta > 0$ is the scaling parameter. In addition, we construct \widehat{V}_h based on \mathcal{D} as

$$\begin{aligned} \widehat{Q}_h(x, a) &= \min\{\overline{Q}_h(x, a), H - h + 1\}^+, \quad \text{where } \overline{Q}_h(x, a) = (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) - \Gamma_h(x, a), \\ \widehat{V}_h(x) &= \langle \widehat{Q}_h(x, \cdot), \widehat{\pi}_h(\cdot | x) \rangle_{\mathcal{A}}, \quad \text{where } \widehat{\pi}_h(\cdot | x) = \arg \max_{\pi_h} \langle \widehat{Q}_h(x, \cdot), \pi_h(\cdot | x) \rangle_{\mathcal{A}}. \end{aligned}$$

Algorithm 2 Pessimistic Value Iteration (PEVI): Linear MDP

- 1: Input: Dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$.
 - 2: Initialization: Set $\widehat{V}_{H+1}(\cdot) \leftarrow 0$.
 - 3: **for** step $h = H, H-1, \dots, 1$ **do**
 - 4: Set $\Lambda_h \leftarrow \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top + \lambda \cdot I$.
 - 5: Set $\widehat{w}_h \leftarrow \Lambda_h^{-1} (\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)))$. //Estimation
 - 6: Set $\Gamma_h(\cdot, \cdot) \leftarrow \beta \cdot (\phi(\cdot, \cdot)^\top \Lambda_h^{-1} \phi(\cdot, \cdot))^{1/2}$. //Uncertainty
 - 7: Set $\overline{Q}_h(\cdot, \cdot) \leftarrow \phi(\cdot, \cdot)^\top \widehat{w}_h - \Gamma_h(\cdot, \cdot)$. //Pessimism
 - 8: Set $\widehat{Q}_h(\cdot, \cdot) \leftarrow \min\{\overline{Q}_h(\cdot, \cdot), H - h + 1\}^+$. //Truncation
 - 9: Set $\widehat{\pi}_h(\cdot | \cdot) \leftarrow \arg \max_{\pi_h} \langle \widehat{Q}_h(\cdot, \cdot), \pi_h(\cdot | \cdot) \rangle_{\mathcal{A}}$. //Optimization
 - 10: Set $\widehat{V}_h(\cdot) \leftarrow \langle \widehat{Q}_h(\cdot, \cdot), \widehat{\pi}_h(\cdot | \cdot) \rangle_{\mathcal{A}}$. //Evaluation
 - 11: **end for**
 - 12: Output: $\text{Pess}(\mathcal{D}) = \{\widehat{\pi}_h\}_{h=1}^H$.
-

The following theorem characterizes the suboptimality of Algorithm 2, which is defined in Equation (2.6).

Theorem 4.4 (Suboptimality for Linear MDP). Suppose Assumption 2.2 holds and the underlying MDP is a linear MDP. In Algorithm 2, we set

$$\lambda = 1, \quad \beta = c \cdot dH\sqrt{\zeta}, \quad \text{where } \zeta = \log(2dHK/\xi).$$

Here $c > 0$ is an absolute constant and $\xi \in (0, 1)$ is the confidence parameter. The following statements hold: (i) $\{\Gamma_h\}_{h=1}^H$ in Algorithm 2, which is specified in Equation (4.7), is a ξ -uncertainty quantifier, and hence (ii) under \mathcal{E} defined in Equation (4.1), which satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$, for any $x \in \mathcal{S}$, $\text{Pess}(\mathcal{D})$ in Algorithm 2 satisfies

$$\text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq 2\beta \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x \right]. \quad (4.8)$$

Here \mathbb{E}_{π^*} is taken with respect to the trajectory induced by π^* in the underlying MDP given the fixed matrix Λ_h .

Proof of Theorem 4.4. See Section 5.2 for a proof sketch. □

We highlight the following aspects of Theorem 4.4:

“Assumption-Free” Guarantee: Theorem 4.4 only relies on the compliance of \mathcal{D} with the linear MDP. In comparison with existing literature (Antos et al., 2007, 2008; Munos and Szepesvári, 2008; Farahmand et al., 2010, 2016; Scherrer et al., 2015; Liu et al., 2018; Nachum et al., 2019a,b;

Chen and Jiang, 2019; Tang et al., 2019; Kallus and Uehara, 2019, 2020; Fan et al., 2020; Xie and Jiang, 2020a,b; Jiang and Huang, 2020; Uehara et al., 2020; Duan et al., 2020; Yin et al., 2020; Qu and Wierman, 2020; Li et al., 2020; Liao et al., 2020; Nachum and Dai, 2020; Yang et al., 2020a; Zhang et al., 2020a,b), we require no assumptions on the “uniform coverage” of \mathcal{D} , e.g., finite concentrability coefficients and uniformly lower bounded densities of visitation measures, which often fail to hold in practice. Meanwhile, we impose no restrictions on the affinity between $\mathbf{Pess}(\mathcal{D})$ and a fixed behavior policy that induces \mathcal{D} , which is often employed as a regularizer (or equivalently, a constraint) in existing literature (Fujimoto et al., 2019; Laroche et al., 2019; Jaques et al., 2019; Wu et al., 2019; Kumar et al., 2019; Wang et al., 2020c; Siegel et al., 2020; Nair et al., 2020; Liu et al., 2020).

Intrinsic Uncertainty Versus Spurious Correlation: The suboptimality in Equation (4.8) only corresponds to term (ii) in Equation (3.2), which characterizes the intrinsic uncertainty. Note that Λ_h depends on \mathcal{D} but acts as a fixed matrix in the expectation, that is, \mathbb{E}_{π^*} is only taken with respect to (s_h, a_h) , which lies on the trajectory induced by π^* . In other words, as π^* is intrinsic to the underlying MDP and hence does not depend on \mathcal{D} , the suboptimality in Equation (4.8) does not suffer from the spurious correlation, that is, term (i) in Equation (3.2), which arises from the dependency of $\hat{\pi} = \mathbf{Pess}(\mathcal{D})$ on \mathcal{D} .

The following corollary proves as long as the trajectory induced by π^* is “covered” by \mathcal{D} sufficiently well, the suboptimality of Algorithm 2 decays at a $K^{-1/2}$ rate.

Corollary 4.5 (Sufficient “Coverage”). Suppose there exists an absolute constant $c^\dagger > 0$ such that the event

$$\mathcal{E}^\dagger = \left\{ \Lambda_h \geq I + c^\dagger \cdot K \cdot \mathbb{E}_{\pi^*} [\phi(s_h, a_h) \phi(s_h, a_h)^\top \mid s_1 = x] \text{ for all } x \in \mathcal{S}, h \in [H] \right\} \quad (4.9)$$

satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^\dagger) \geq 1 - \xi/2$. Here Λ_h is defined in Equation (4.6) and \mathbb{E}_{π^*} is taken with respect to the trajectory induced by π^* in the underlying MDP. In Algorithm 2, we set

$$\lambda = 1, \quad \beta = c \cdot dH\sqrt{\zeta}, \quad \text{where } \zeta = \log(4dHK/\xi).$$

Here $c > 0$ is an absolute constant and $\xi \in (0, 1)$ is the confidence parameter. For $\mathbf{Pess}(\mathcal{D})$ in Algorithm 2, the event

$$\mathcal{E}' = \left\{ \text{SubOpt}(\mathbf{Pess}(\mathcal{D}); x) \leq c' \cdot d^{3/2} H^2 K^{-1/2} \sqrt{\zeta} \text{ for all } x \in \mathcal{S} \right\} \quad (4.10)$$

satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}') \geq 1 - \xi$, where $c' > 0$ is an absolute constant that only depends on c^\dagger and c . In particular, if $\text{rank}(\Sigma_h(x)) \leq r$ for all $x \in \mathcal{S}$ at each step $h \in [H]$, where

$$\Sigma_h(x) = \mathbb{E}_{\pi^*} [\phi(s_h, a_h) \phi(s_h, a_h)^\top \mid s_1 = x],$$

for $\text{Pess}(\mathcal{D})$ in Algorithm 2, the event

$$\mathcal{E}'' = \left\{ \text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq c'' \cdot dH^2 K^{-1/2} \sqrt{\zeta} \text{ for all } x \in \mathcal{S} \right\} \quad (4.11)$$

satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}'') \geq 1 - \xi$, where $c'' > 0$ is an absolute constant that only depends on c^\dagger , c , and r .

Proof of Corollary 4.5. See Appendix B.3 for a detailed proof. \square

Intrinsic Uncertainty as Information Gain: To understand Equation (4.8), we interpret the intrinsic uncertainty in the suboptimality, which corresponds to term (ii) in Equation (3.2), from a Bayesian perspective. Recall that constructing $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ based on \mathcal{D} at each step $h \in [H]$ involves solving the linear regression problem in Equation (4.5), where $\phi(x_h^\tau, a_h^\tau)$ is the covariate, $r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)$ is the response, and \widehat{w}_h is the estimated regression coefficient. Here \widehat{V}_{h+1} acts as a fixed function. We consider the Bayesian counterpart of such a linear regression problem. Note that the estimator \widehat{w}_h specified in Equation (4.6) is the Bayesian estimator of w_h under the prior $w_h \sim \mathcal{N}(0, \lambda \cdot I)$ and Gaussian distribution of the response with variance one (conditioning on the covariate). Under the Bayesian framework, the posterior has the closed form

$$w_h \mid \mathcal{D} \sim \mathcal{N}(\widehat{w}_h, \Lambda_h^{-1}), \quad (4.12)$$

where \widehat{w}_h and Λ_h are defined in Equation (4.6). Correspondingly, we have

$$\begin{aligned} \mathcal{I}(w_h; \phi(s_h, a_h) \mid \mathcal{D}) &= \mathcal{H}(w_h \mid \mathcal{D}) - \mathcal{H}(w_h \mid \mathcal{D}, \phi(s_h, a_h)) \\ &= 1/2 \cdot \log \frac{\det(\Lambda_h^\dagger)}{\det(\Lambda_h)}, \quad \text{where } \Lambda_h^\dagger = \Lambda_h + \phi(s_h, a_h) \phi(s_h, a_h)^\top. \end{aligned}$$

Here \mathcal{I} is the (conditional) mutual information and \mathcal{H} is the (conditional) differential entropy. Meanwhile, we have

$$\begin{aligned} \log \frac{\det(\Lambda_h^\dagger)}{\det(\Lambda_h)} &= \log \det(I + \Lambda_h^{-1/2} \phi(s_h, a_h) \phi(s_h, a_h)^\top \Lambda_h^{-1/2}) \\ &= \log(1 + \phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h)) \approx \phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h), \end{aligned}$$

where the second equality follows from the matrix determinant lemma and the last equality holds when $\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h)$ is close to zero. Therefore, in Equation (4.8), we have

$$\mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x \right] \approx \sqrt{2} \cdot \mathbb{E}_{\pi^*} \left[\mathcal{I}(w_h; \phi(s_h, a_h) \mid \mathcal{D})^{1/2} \mid s_1 = x \right].$$

In other words, the suboptimality in Equation (4.8), which corresponds to the intrinsic uncertainty, can be cast as the mutual information between $w_h \mid \mathcal{D}$ in Equation (4.12) and $\phi(s_h, a_h)$ on the trajectory induced by π^* in the underlying MDP. In particular, such a mutual information can be cast as the information gain (Schmidhuber, 1991, 2010; Sun et al., 2011; Still and Precup, 2012;

Houthoofd et al., 2016; Russo and Van Roy, 2016, 2018) for estimating w_h , which is induced by observing $\phi(s_h, a_h)$ in addition to \mathcal{D} . In other words, such a mutual information characterizes how much uncertainty in $w_h \mid \mathcal{D}$ can be eliminated when we additionally condition on $\phi(s_h, a_h)$.

Illustration via a Special Case: Tabular MDP: To understand Equation (4.8), we consider the tabular MDP, a special case of the linear MDP, where \mathcal{S} and \mathcal{A} are discrete. Correspondingly, we set ϕ in Equation (4.4) as the canonical basis of $\mathbb{R}^{|\mathcal{S}||\mathcal{A}|}$. When \mathcal{S} is a singleton and $H = 1$, the tabular MDP reduces to the MAB, which is discussed in Section 3.2. Specifically, in the tabular MDP, we have

$$\begin{aligned}\Lambda_h &= \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top + \lambda \cdot I \\ &= \text{diag}(\{N_h(x, a) + \lambda\}_{(x,a) \in \mathcal{S} \times \mathcal{A}}) \in \mathbb{R}^{|\mathcal{S}||\mathcal{A}| \times |\mathcal{S}||\mathcal{A}|}, \quad \text{where } N_h(x, a) = \sum_{\tau=1}^K \mathbf{1}\{(x_h^\tau, a_h^\tau) = (x, a)\}.\end{aligned}$$

To simplify the subsequent discussion, we assume \mathcal{P}_h is deterministic at each step $h \in [H]$. Let $\{(s_h^*, a_h^*)\}_{h=1}^H$ be the trajectory induced by π^* , which is also deterministic. In Equation (4.8), we have

$$\mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x \right] = (N_h(s_h^*, a_h^*) + \lambda)^{-1/2}.$$

In other words, the suboptimality in Equation (4.8) only depends on how well \mathcal{D} “covers” the trajectory induced by π^* instead of its “uniform coverage” over \mathcal{S} and \mathcal{A} . In particular, as long as $(s_h^\diamond, a_h^\diamond)$ lies off the trajectory induced by π^* , how well \mathcal{D} “covers” $(s_h^\diamond, a_h^\diamond)$, that is, $N_h(s_h^\diamond, a_h^\diamond)$, does not affect the suboptimality in Equation (4.8). See Figure 2 for an illustration.

Oracle Property: Following existing literature (Donoho and Johnstone, 1994; Fan and Li, 2001; Zou, 2006), we refer to such a phenomenon as the oracle property, that is, the algorithm incurs an “oracle” suboptimality that automatically “adapts” to the support of the trajectory induced by π^* , even though π^* is unknown a priori. From another perspective, assuming hypothetically π^* is known a priori, the error that arises from estimating the transition kernel and expected reward function at (s_h^*, a_h^*) scales as $N_h(s_h^*, a_h^*)^{-1/2}$, which can not be improved due to the information-theoretic lower bound.

Outperforming Demonstration: Assuming hypothetically \mathcal{D} is induced by a fixed behavior policy $\bar{\pi}$ (namely the demonstration), such an oracle property allows $\text{Pess}(\mathcal{D})$ to outperform $\bar{\pi}$ in terms of the suboptimality, which is defined in Equation (2.6). Specifically, it is quite possible that $r_h(s_h^\diamond, a_h^\diamond)$ is relatively small and $N_h(s_h^\diamond, a_h^\diamond)$ is rather large for a certain $(s_h^\diamond, a_h^\diamond)$, which is “covered” by \mathcal{D} but lies off the trajectory induced by π^* . Correspondingly, the suboptimality of $\bar{\pi}$ can be rather large. On the other hand, as discussed above, $r_h(s_h^\diamond, a_h^\diamond)$ and $N_h(s_h^\diamond, a_h^\diamond)$ do not affect the

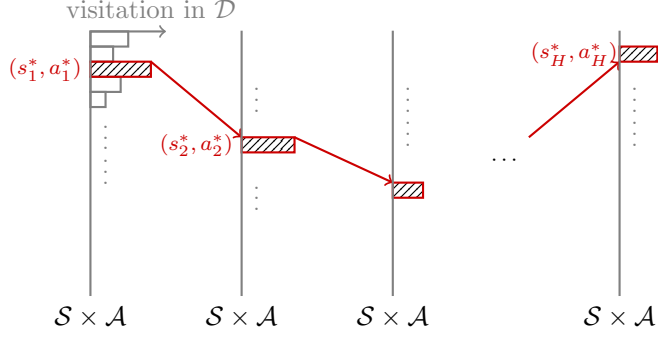


Figure 2: An illustration of the oracle property in the tabular MDP, where the transition kernel is deterministic. The histogram depicts the number of times (s_h, a_h) is visited in \mathcal{D} . The suboptimality in Equation (4.8) only depends on the number of times (s_h^*, a_h^*) , which lies on the trajectory induced by π^* , is visited in \mathcal{D} , even though π^* is unknown a priori.

suboptimality of $\text{Pess}(\mathcal{D})$, which can be relatively small as long as $N_h(s_h^*, a_h^*)$ is sufficiently large. Here (s_h^*, a_h^*) is “covered” by \mathcal{D} and lies on the trajectory induced by π^* .

Well-Explored Dataset: To connect existing literature (Duan et al., 2020), the following corollary specializes Theorem 4.4 under the additional assumption that the data collecting process well explores \mathcal{S} and \mathcal{A} .

Corollary 4.6 (Well-Explored Dataset). Suppose \mathcal{D} consists of K trajectories $\{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$ independently and identically induced by a fixed behavior policy $\bar{\pi}$ in the linear MDP. Meanwhile, suppose there exists an absolute constant $\underline{c} > 0$ such that

$$\lambda_{\min}(\Sigma_h) \geq \underline{c}, \quad \text{where } \Sigma_h = \mathbb{E}_{\bar{\pi}}[\phi(s_h, a_h)\phi(s_h, a_h)^\top]$$

at each step $h \in [H]$. Here $\mathbb{E}_{\bar{\pi}}$ is taken with respect to the trajectory induced by $\bar{\pi}$ in the underlying MDP. In Algorithm 2, we set

$$\lambda = 1, \quad \beta = c \cdot dH\sqrt{\zeta}, \quad \text{where } \zeta = \log(4dHK/\xi).$$

Here $c > 0$ is an absolute constant and $\xi \in (0, 1)$ is the confidence parameter. Suppose we have $K \geq C \cdot \log(4dH/\xi)$, where $C > 0$ is a sufficiently large absolute constant that depends on \underline{c} . For $\text{Pess}(\mathcal{D})$ in Algorithm 2, the event

$$\mathcal{E}^* = \left\{ \text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq c' \cdot dH^2 K^{-1/2} \sqrt{\zeta} \text{ for all } x \in \mathcal{S} \right\} \quad (4.13)$$

satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^*) \geq 1 - \xi$. Here $c' > 0$ is an absolute constant that only depends on \underline{c} and c .

Proof of Corollary 4.6. See Appendix B.4 for a detailed proof. \square

The suboptimality in Equation (4.13) parallels the policy evaluation error established in Duan et al. (2020), which also scales as $H^2 K^{-1/2}$ and attains the information-theoretic lower bound for offline policy evaluation. In contrast, we focus on offline policy optimization, which is more challenging. As $K \rightarrow \infty$, the suboptimality in Equation (4.13) goes to zero.

4.3 Minimax Optimality: Information-Theoretic Lower Bound

We establish the minimax optimality of Theorems 4.2 and 4.4 via the following information-theoretic lower bound. Recall that $\mathbb{P}_{\mathcal{D}}$ is the joint distribution of the data collecting process.

Theorem 4.7 (Information-Theoretic Lower Bound). For the output $\text{Algo}(\mathcal{D})$ of any algorithm, there exist a linear MDP $\mathcal{M} = (\mathcal{S}, \mathcal{A}, H, \mathcal{P}, r)$, an initial state $x \in \mathcal{S}$, and a dataset \mathcal{D} , which is compliant with \mathcal{M} , such that

$$\mathbb{E}_{\mathcal{D}} \left[\frac{\text{SubOpt}(\text{Algo}(\mathcal{D}); x)}{\sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x \right]} \right] \geq c, \quad (4.14)$$

where $c > 0$ is an absolute constant. Here \mathbb{E}_{π^*} is taken with respect to the trajectory induced by π^* in the underlying MDP given the fixed matrix Λ_h . Meanwhile, $\mathbb{E}_{\mathcal{D}}$ is taken with respect to $\mathbb{P}_{\mathcal{D}}$, where $\text{Algo}(\mathcal{D})$ and Λ_h depend on \mathcal{D} .

Proof of Theorem 4.7. See Section 5.3 for a proof sketch and Appendix C.3 for a detailed proof. \square

Theorem 4.7 matches Theorem 4.4 up to β and absolute constants. Although Theorem 4.7 only establishes the minimax optimality, Proposition C.2 further certifies the local optimality on the constructed set of worst-case MDPs via a more refined instantiation of the meta-algorithm (Algorithm 1). See Appendix C.4 for a detailed discussion.

5 Proof Sketch

In this section, we sketch the proofs of the main results in Section 4. In Section 5.1, we sketch the proof of Theorem 4.2, which handles any general MDP. In Section 5.2, we specialize it to the linear MDP, which is handled by Theorem 4.4. In Section 5.3, we sketch the proof of Theorem 4.7, which establishes the information-theoretic lower bound.

5.1 Suboptimality of PEVI: General MDP

Recall that we define the model evaluation errors $\{\iota_h\}_{h=1}^H$ in Equation (3.1), which are based on the (action- and state-)value functions $\{(\hat{Q}_h, \hat{V}_h)\}_{h=1}^H$ constructed by PEVI. Also, recall that we define the ξ -uncertainty quantifiers $\{\Gamma_h\}_{h=1}^H$ in Definition 4.1. The key to the proof of Theorem 4.2 is to

show that for all $h \in [H]$, the constructed Q-function \widehat{Q}_h in Algorithm 1 is a pessimistic estimator of the optimal Q-function Q_h^* . To this end, in the following lemma, we prove that under the event \mathcal{E} defined in Equation (4.1), ι_h lies within $[0, 2\Gamma_h]$ in a pointwise manner for all $h \in [H]$. Recall that $\mathbb{P}_{\mathcal{D}}$ is the joint distribution of the data collecting process.

Lemma 5.1 (Pessimism for General MDP). Suppose that $\{\Gamma_h\}_{h=1}^H$ in Algorithm 1 are ξ -uncertainty quantifiers. Under \mathcal{E} defined in Equation (4.1), which satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$, we have

$$0 \leq \iota_h(x, a) \leq 2\Gamma_h(x, a), \quad \text{for all } (x, a) \in \mathcal{S} \times \mathcal{A}, \quad h \in [H]. \quad (5.1)$$

Proof of Lemma 5.1. See Appendix B.1 for a detailed proof. \square

In Equation (5.1), the nonnegativity of $\{\iota_h\}_{h=1}^H$ implies the pessimism of $\{\widehat{Q}_h\}_{h=1}^H$, that is, $\widehat{Q}_h \leq Q_h^*$ in a pointwise manner for all $h \in [H]$. To see this, note that the definition of $\{\iota_h\}_{h=1}^H$ in Equation (3.1) gives

$$Q_h^*(x, a) - \widehat{Q}_h(x, a) \geq (\mathbb{B}_h V_{h+1}^*)(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a) = (\mathbb{P}_h V_{h+1}^*)(x, a) - (\mathbb{P}_h \widehat{V}_{h+1})(x, a), \quad (5.2)$$

which together with Equations (2.3) and (2.5) further implies

$$\begin{aligned} Q_h^*(x, a) - \widehat{Q}_h(x, a) &\geq \mathbb{E}[\max_{a' \in \mathcal{A}} Q_{h+1}^*(s_{h+1}, a') - \langle \widehat{Q}_{h+1}(s_{h+1}, \cdot), \widehat{\pi}_{h+1}(\cdot | s_{h+1}) \rangle_{\mathcal{A}} \mid s_h = x, a_h = a] \\ &\geq \mathbb{E}[\langle Q_{h+1}^*(s_{h+1}, \cdot) - \widehat{Q}_{h+1}(s_{h+1}, \cdot), \widehat{\pi}_{h+1}(\cdot | s_{h+1}) \rangle_{\mathcal{A}} \mid s_h = x, a_h = a] \end{aligned} \quad (5.3)$$

for all $(x, a) \in \mathcal{S} \times \mathcal{A}$ and $h \in [H]$. Also, note that $\widehat{V}_{H+1} = V_{H+1}^* = 0$. Therefore, Equation (5.2) implies $Q_H^* \geq \widehat{Q}_H$ in a pointwise manner. Moreover, by recursively applying Equation (5.3), we have $Q_h^* \geq \widehat{Q}_h$ in a pointwise manner for all $h \in [H]$. In other words, Lemma 5.1 implies that the pessimism of $\{\widehat{Q}_h\}_{h=1}^H$ holds with probability at least $1 - \xi$ as long as $\{\Gamma_h\}_{h=1}^H$ in Algorithm 1 are ξ -uncertainty quantifiers, which serves as a sufficient condition that can be verified. Meanwhile, the upper bound of $\{\iota_h\}_{h=1}^H$ in Equation (5.1) controls the underestimation bias of $\{\widehat{Q}_h\}_{h=1}^H$, which arises from pessimism.

Based on Lemma 5.1, we are ready to prove Theorem 4.2.

Proof of Theorem 4.2. We upper bound the three terms on the right-hand side of Equation (3.2) respectively. Specifically, we apply Lemma 3.1 by setting $\widehat{\pi} = \{\widehat{\pi}_h\}_{h=1}^H$ as the output of Algorithm 1, that is, $\widehat{\pi} = \text{Pess}(\mathcal{D})$. As $\widehat{\pi}_h$ is greedy with respect to \widehat{Q}_h for all $h \in [H]$, term (iii) in Equation (3.2) is nonpositive. Therefore, we have

$$\text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq \underbrace{-\sum_{h=1}^H \mathbb{E}_{\widehat{\pi}}[\iota_h(s_h, a_h) \mid s_1 = x]}_{\text{(i)}} + \underbrace{\sum_{h=1}^H \mathbb{E}_{\pi^*}[\iota_h(s_h, a_h) \mid s_1 = x]}_{\text{(ii)}} \quad (5.4)$$

for all $x \in \mathcal{S}$, where terms (i) and (ii) characterize the spurious correlation and intrinsic uncertainty, respectively. To upper bound such two terms, we invoke Lemma 5.1, which implies

$$(i) \leq 0, \quad (ii) \leq 2 \sum_{h=1}^H \mathbb{E}_{\pi^*} [\Gamma_h(s_h, a_h) \mid s_1 = x] \quad (5.5)$$

for all $x \in \mathcal{S}$. Combining Equations (5.4) and (5.5), we obtain Equation (4.2) under \mathcal{E} defined in Equation (4.1). Meanwhile, by Definition 4.1, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$. Therefore, we conclude the proof of Theorem 4.2. \square

5.2 Suboptimality of PEVI: Linear MDP

Based on Theorem 4.2, we are ready to prove Theorem 4.4, which is specialized to the linear MDP defined in Definition 4.3.

Proof of Theorem 4.4. It suffices to show that $\{\Gamma_h\}_{h=1}^H$ specified in Equation (4.7) are ξ -uncertainty quantifiers, which are defined in Definition 4.1. In the following lemma, we prove that such a statement holds when the regularization parameter $\lambda > 0$ and scaling parameter $\beta > 0$ in Algorithm 2 are properly chosen.

Lemma 5.2 (ξ -Uncertainty Quantifier for Linear MDP). Suppose that Assumption 2.2 holds and the underlying MDP is a linear MDP. In Algorithm 2, we set

$$\lambda = 1, \quad \beta = c \cdot dH\sqrt{\zeta}, \quad \text{where } \zeta = \log(2dHK/\xi).$$

Here $c > 0$ is an absolute constant and $\xi \in (0, 1)$ is the confidence parameter. It holds that $\{\Gamma_h\}_{h=1}^H$ specified in Equation (4.7) are ξ -uncertainty quantifiers, where $\{\hat{V}_{h+1}\}_{h=1}^H$ used in Equation (4.1) are obtained by Algorithm 2.

Proof of Lemma 5.2. See Appendix B.2 for a detailed proof. \square

As Lemma 5.2 proves that $\{\Gamma_h\}_{h=1}^H$ specified in Equation (4.7) are ξ -uncertainty quantifiers, \mathcal{E} defined in Equation (4.1) satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$. Recall that $\mathbb{P}_{\mathcal{D}}$ is the joint distribution of the data collecting process. By specializing Theorem 4.2 to the linear MDP, we have

$$\begin{aligned} \text{SubOpt}(\text{Pess}(\mathcal{D}); x) &\leq 2 \sum_{h=1}^H \mathbb{E}_{\pi^*} [\Gamma_h(s_h, a_h) \mid s_1 = x] \\ &= 2\beta \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x \right] \end{aligned}$$

for all $x \in \mathcal{S}$ under \mathcal{E} defined in Equation (4.1). Here the last equality follows from Equation (4.7). Therefore, we conclude the proof of Theorem 4.4. \square

5.3 Minimax Optimality of PEVI

In this section, we sketch the proof of Theorem 4.7, which establishes the minimax optimality of Theorem 4.4 for the linear MDP. Specifically, in Section 5.3.1, we construct a class \mathfrak{M} of linear MDPs and a worst-case dataset \mathcal{D} , while in Section 5.3.2, we prove Theorem 4.7 via the information-theoretic lower bound.

5.3.1 Construction of a Hard Instance

In the sequel, we construct a class \mathfrak{M} of linear MDPs and a worst-case dataset \mathcal{D} , which is compliant with the underlying MDP as defined in Definition 2.1.

Linear MDP: We define the following class of linear MDPs

$$\mathfrak{M} = \{M(p_1, p_2, p_3) : p_1, p_2, p_3 \in [1/4, 3/4] \text{ with } p_3 = \min\{p_1, p_2\}\}, \quad (5.6)$$

where $M(p_1, p_2, p_3)$ is an episodic MDP with the horizon $H \geq 2$, state space $\mathcal{S} = \{x_0, x_1, x_2\}$, and action space $\mathcal{A} = \{b_j\}_{j=1}^A$ with $|\mathcal{A}| = A \geq 3$. In particular, we fix the initial state as $s_1 = x_0$. For the transition kernel, at the first step $h = 1$, we set

$$\begin{aligned} \mathcal{P}_1(x_1 | x_0, b_1) &= p_1, & \mathcal{P}_1(x_2 | x_0, b_1) &= 1 - p_1, \\ \mathcal{P}_1(x_1 | x_0, b_2) &= p_2, & \mathcal{P}_1(x_2 | x_0, b_2) &= 1 - p_2, \\ \mathcal{P}_1(x_1 | x_0, b_j) &= p_3, & \mathcal{P}_1(x_2 | x_0, b_j) &= 1 - p_3, \quad \text{for all } j \in \{3, \dots, A\}. \end{aligned} \quad (5.7)$$

Meanwhile, at any subsequent step $h \in \{2, \dots, H\}$, we set

$$\mathcal{P}_h(x_1 | x_1, a) = \mathcal{P}_h(x_2 | x_2, a) = 1, \quad \text{for all } a \in \mathcal{A}.$$

In other words, $x_1, x_2 \in \mathcal{S}$ are the absorbing states. Here $\mathcal{P}_1(x_1 | x_0, b_1)$ abbreviates $\mathcal{P}_1(s_2 = x_1 | s_1 = x_0, a_1 = b_1)$. For the reward function, we set

$$\begin{aligned} r_1(x_0, a) &= 0, \quad \text{for all } a \in \mathcal{A}, \\ r_h(x_1, a) &= 1, \quad r_h(x_2, a) = 0, \quad \text{for all } a \in \mathcal{A}, \quad h \in \{2, \dots, H\}. \end{aligned} \quad (5.8)$$

See Figure 3 for an illustration. Note that $M(p_1, p_2, p_3)$ is a linear MDP, which is defined in Definition 4.3 with the dimension $d = A + 2$. To see this, we set the corresponding feature map $\phi: \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}^d$ as

$$\begin{aligned} \phi(x_0, b_j) &= (\mathbf{e}_j, 0, 0) \in \mathbb{R}^{A+2}, \quad \text{for all } j \in [A], \\ \phi(x_1, a) &= (\mathbf{0}_A, 1, 0) \in \mathbb{R}^{A+2}, \quad \text{for all } a \in \mathcal{A}, \\ \phi(x_2, a) &= (\mathbf{0}_A, 0, 1) \in \mathbb{R}^{A+2}, \quad \text{for all } a \in \mathcal{A}, \end{aligned} \quad (5.9)$$

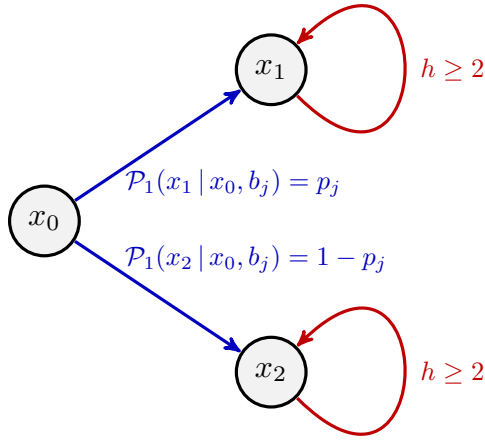


Figure 3: An illustration of the episodic MDP $\mathcal{M} = M(p_1, p_2, p_3) \in \mathfrak{M}$ with the state space $\mathcal{S} = \{x_0, x_1, x_2\}$ and action space $\mathcal{A} = \{b_j\}_{j=1}^A$. Here we fix the initial state as $s_1 = x_0$, where the agent takes the action $a \in \mathcal{A}$ and transits into the second state $s_2 \in \{x_1, x_2\}$. At the first step $h = 1$, the transition probability satisfies $\mathcal{P}_1(x_1 | x_0, b_j) = p_j$ and $\mathcal{P}_1(x_2 | x_0, b_j) = 1 - p_j$ for all $j \in [A]$, where for notational simplicity, we define $p_j = p_3$ for all $j \in \{3, \dots, A\}$. Also, $x_1, x_2 \in \mathcal{S}$ are the absorbing states. Meanwhile, the reward function satisfies $r_h(x_0, a) = 0$, $r_h(x_1, a) = 1$, and $r_h(x_2, a) = 0$ for all $a \in \mathcal{A}$ and $h \in [H]$.

where $\{e_j\}_{j=1}^A$ and $\mathbf{0}_A$ are the canonical basis and zero vector in \mathbb{R}^A , respectively.

As $x_1, x_2 \in \mathcal{S}$ are the absorbing states, the optimal policy π_1^* at the first step $h = 1$ is a deterministic policy, which by Equation (5.8) selects the action $a \in \mathcal{A}$ that induces the largest transition probability into the desired state x_1 . In other words, at the first step $h = 1$, we have

$$\pi_1^*(b_{j^*} | x_0) = 1, \quad \text{where } j^* = \arg \max_{j \in \{1,2\}} p_j. \quad (5.10)$$

Here we assume without loss of generality $p_1 \neq p_2$ in Equation (5.7). Meanwhile, at any subsequent step $h \in \{2, \dots, H\}$, an arbitrary policy π_h is optimal, as the action $a \in \mathcal{A}$ selected by π_h does not affect the transition probability. Therefore, for any policy $\pi = \{\pi_h\}_{h=1}^H$, the suboptimality of π for the linear MDP $\mathcal{M} = M(p_1, p_2, p_3)$ takes the form

$$\text{SubOpt}(\mathcal{M}, \pi; x_0) = p_{j^*} \cdot (H - 1) - \sum_{j=1}^A p_j \cdot \pi_1(b_j | x_0) \cdot (H - 1), \quad (5.11)$$

where for notational simplicity, we define $p_j = p_3$ for all $j \in \{3, \dots, A\}$. Here with an abuse of notation, we incorporate the explicit dependency on the underlying MDP $\mathcal{M} \in \mathfrak{M}$ into the suboptimality $\text{SubOpt}(\pi; x_0)$.

Dataset: We specify the worst-case data collecting process $\mathbb{P}_{\mathcal{D}}$ as follows. Given a linear MDP $\mathcal{M} \in \mathfrak{M}$, the dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$ consists of K trajectories starting from the same initial state x_0 , that is, $x_1^\tau = x_0$ for all $\tau \in [K]$. The initial actions $\{a_1^\tau\}_{\tau=1}^K$ are predetermined. The subsequent states $\{x_h^\tau\}_{\tau \in [K], h \geq 2}$ are sampled from the underlying MDP $\mathcal{M} = M(p_1, p_2, p_3)$, while the subsequent actions $\{a_h^\tau\}_{\tau \in [K], h \geq 2}$ are arbitrarily chosen, as they do not affect the state transitions. The state transitions in the different trajectories are independent. The immediate reward r_h^τ satisfies $r_h^\tau = r_h(x_h^\tau, a_h^\tau)$. Note that such a dataset \mathcal{D} satisfies Assumption 2.2, that is, \mathcal{D} is compliant with the linear MDP $\mathcal{M} \in \mathfrak{M}$.

We define

$$n_j = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\}, \quad \{\kappa_j^i\}_{i=1}^{n_j} = \{r_2^\tau : a_1^\tau = b_j \text{ with } \tau \in [K]\}, \quad \text{for all } j \in [A]. \quad (5.12)$$

In other words, assuming that $1 \leq \tau_1 < \tau_2 < \dots < \tau_{n_j} \leq K$ are the episode indices such that $a_1^{\tau_i} = b_j$ for all $i \in [n_j]$, we define $\kappa_j^i = r_2^{\tau_i}$ for all $j \in [A]$. By such a construction, $\{\kappa_j^i\}_{i,j=1}^{n_j, A}$ are the realizations of K independent Bernoulli random variables, which satisfy

$$\mathbb{E}_{\mathcal{D}}[\kappa_j^i] = p_j, \quad \text{for all } i \in [n_j], j \in [A]. \quad (5.13)$$

Note that knowing the value of the immediate reward r_2^τ is sufficient for determining the value of the second state x_2^τ . Meanwhile, recall that $x_1, x_2 \in \mathcal{S}$ are the absorbing states. Therefore, for learning the optimal policy π^* , the original dataset \mathcal{D} contains the same information as the reduced

dataset $\mathcal{D}_1 = \{(x_1^\tau, a_1^\tau, x_2^\tau, r_2^\tau)\}_{\tau=1}^K$, where the randomness only comes from the state transition at the first step $h = 1$ of each trajectory $\tau \in [K]$. Correspondingly, the probability of observing the dataset \mathcal{D}_1 takes the form

$$\begin{aligned} \mathbb{P}_{\mathcal{D} \sim \mathcal{M}}(\mathcal{D}_1) &= \prod_{\tau=1}^K \mathbb{P}_{\mathcal{M}}(r_2(s_2, a_2) = r_2^\tau \mid s_1 = x_1^\tau, a_1 = a_1^\tau) \\ &= \prod_{j=1}^A \left(\prod_{i=1}^{n_j} p_j^{\kappa_j^i} \cdot (1 - p_j)^{1 - \kappa_j^i} \right) = \prod_{j=1}^A \left(p_j^{\sum_{i=1}^{n_j} \kappa_j^i} \cdot (1 - p_j)^{n_j - \sum_{i=1}^{n_j} \kappa_j^i} \right). \end{aligned} \quad (5.14)$$

Here $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}}$ denotes the randomness of the dataset \mathcal{D} , which is compliant with the underlying MDP $\mathcal{M} = M(p_1, p_2, p_3)$, while $\mathbb{P}_{\mathcal{M}}$ denotes the randomness of the immediate rewards and state transitions. In the second equality, we apply the definition of $\{\kappa_j^i\}_{i=1}^{n_j}$ in Equation (5.12). By such a definition, $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}}(\mathcal{D}_1)$ in Equation (5.14) is the likelihood of the linear MDP $\mathcal{M} \in \mathfrak{M}$ given the reduced dataset \mathcal{D}_1 (or equivalently, the original dataset \mathcal{D} , assuming that the subsequent actions $\{a_h^\tau\}_{\tau \in [K], h \geq 2}$ are predetermined).

5.3.2 Information-Theoretic Lower Bound

The proof of Theorem 4.7 is based on the Le Cam method (Le Cam, 2012; Yu, 1997). Specifically, we construct two linear MDPs $\mathcal{M}_1, \mathcal{M}_2 \in \mathfrak{M}$, where the class \mathfrak{M} of linear MDPs is defined in Equation (5.6). Such a construction ensures that (i) the distribution of the dataset \mathcal{D} , which is compliant with the underlying MDP, is similar across $\mathcal{M}_1, \mathcal{M}_2 \in \mathfrak{M}$, and (ii) the suboptimality of any policy π , which is constructed based on the dataset, is different across $\mathcal{M}_1, \mathcal{M}_2 \in \mathfrak{M}$. In other words, it is hard to distinguish $\mathcal{M}_1, \mathcal{M}_2 \in \mathfrak{M}$ based on \mathcal{D} , while π obtained from \mathcal{D} can not achieve a desired suboptimality for $\mathcal{M}_1, \mathcal{M}_2 \in \mathfrak{M}$ simultaneously. Such a construction captures the fundamental hardness of offline RL for the linear MDP.

For any $p, p^* \in [1/4, 3/4]$, where $p < p^*$, we set

$$\mathcal{M}_1 = M(p^*, p, p), \quad \mathcal{M}_2 = M(p, p^*, p). \quad (5.15)$$

Based on \mathcal{D} , whose likelihood is specified in Equation (5.14), we aim to test whether the underlying MDP is \mathcal{M}_1 or \mathcal{M}_2 . The following lemma establishes a reduction from learning the optimal policy π^* to testing the underlying MDP $\mathcal{M} \in \mathfrak{M}$. Recall that for any $\ell \in \{1, 2\}$, n_ℓ is defined in Equation (5.12).

Lemma 5.3 (Reduction to Testing). For the dataset \mathcal{D} specified in Section 5.3.1, the output $\text{Algo}(\mathcal{D})$ of any algorithm satisfies

$$\begin{aligned} &\max_{\ell \in \{1, 2\}} \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] \\ &\geq \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot (p^* - p) \cdot (H - 1) \cdot \left(\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 \mid x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 \mid x_0)] \right), \end{aligned}$$

where $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$. For any $\ell \in \{1, 2\}$, $\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell}$ is taken with respect to the randomness of \mathcal{D} , which is compliant with the underlying MDP \mathcal{M}_ℓ .

Proof of Lemma 5.3. See Appendix C.1 for a detailed proof. \square

As specified in Equation (5.10), for the underlying MDP \mathcal{M}_1 , the optimal policy π_1^* takes the initial action b_1 with probability one at the initial state x_0 , while for \mathcal{M}_2 , π_1^* takes b_2 with probability one at x_0 . We consider the following hypothesis testing problem

$$H_0: \mathcal{M} = \mathcal{M}_1 \quad \text{versus} \quad H_1: \mathcal{M} = \mathcal{M}_2 \quad (5.16)$$

based on the dataset \mathcal{D} . For such a problem, any test function ψ is a binary map such that $\psi(\mathcal{D}) = 0$ means the null hypothesis H_0 is accepted, while $\psi(\mathcal{D}) = 1$ means H_0 is rejected. For the output $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$ of any algorithm, we define

$$\psi_{\text{Algo}}(\mathcal{D}) = \mathbb{1}\{a \neq b_1\}, \quad \text{where } a \sim \pi_1(\cdot | x_0). \quad (5.17)$$

Correspondingly, the risk of the (randomized) test function ψ_{Algo} takes the form

$$\begin{aligned} \text{Risk}(\psi_{\text{Algo}}) &= \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [\mathbb{1}\{\psi_{\text{Algo}}(\mathcal{D}) = 1\}] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\mathbb{1}\{\psi_{\text{Algo}}(\mathcal{D}) = 0\}] \\ &= \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 | x_0)]. \end{aligned} \quad (5.18)$$

Therefore, Lemma 5.3 lower bounds the suboptimality of any policy $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$ by the risk of a (randomized) test function, which is induced by π , for the corresponding hypothesis testing problem defined in Equation (5.16). Such an approach mirrors the Le Cam method (Le Cam, 2012; Yu, 1997) for establishing the minimax optimality in statistical estimation. In particular, a careful choice of $p, p^* \in [1/4, 3/4]$ leads to the information-theoretic lower bound established in Theorem 4.7. See Appendix C.3 for a detailed proof.

Acknowledgement

The authors would like to thank Alekh Agarwal, Lin Yang, Yining Wang, Chi Jin, Mengdi Wang, Yaqi Duan, and Csaba Szepesvári for helpful discussions.

References

- Abbasi-Yadkori, Y., Pál, D. and Szepesvári, C. (2011). Improved algorithms for linear stochastic bandits. In *Advances in Neural Information Processing Systems*.
- Agarwal, A., Jiang, N. and Kakade, S. M. (2020a). *Reinforcement learning: Theory and algorithms*. MIT.
- Agarwal, R., Schuurmans, D. and Norouzi, M. (2020b). An optimistic perspective on offline reinforcement learning. In *International Conference on Machine Learning*.
- Antos, A., Szepesvári, C. and Munos, R. (2007). Fitted Q-iteration in continuous action-space MDPs. In *Advances in Neural Information Processing Systems*.
- Antos, A., Szepesvári, C. and Munos, R. (2008). Learning near-optimal policies with Bellman-residual minimization based fitted policy iteration and a single sample path. *Machine Learning*, **71** 89–129.
- Ayoub, A., Jia, Z., Szepesvari, C., Wang, M. and Yang, L. F. (2020). Model-based reinforcement learning with value-targeted regression. *arXiv preprint arXiv:2006.01107*.
- Azar, M. G., Osband, I. and Munos, R. (2017). Minimax regret bounds for reinforcement learning. *arXiv preprint arXiv:1703.05449*.
- Bellemare, M. G., Naddaf, Y., Veness, J. and Bowling, M. (2013). The Arcade Learning Environment: An evaluation platform for general agents. *Journal of Artificial Intelligence Research*, **47** 253–279.
- Buckman, J., Gelada, C. and Bellemare, M. G. (2020). The importance of pessimism in fixed-dataset policy optimization. *arXiv preprint arXiv:2009.06799*.
- Cai, Q., Yang, Z., Jin, C. and Wang, Z. (2020). Provably efficient exploration in policy optimization. In *International Conference on Machine Learning*.
- Chakraborty, B. and Murphy, S. A. (2014). Dynamic treatment regimes. *Annual Review of Statistics and Its Application*, **1** 447–464.
- Chen, J. and Jiang, N. (2019). Information-theoretic considerations in batch reinforcement learning. *arXiv preprint arXiv:1905.00360*.
- Chowdhury, S. R. and Gopalan, A. (2017). On kernelized multi-armed bandits. *arXiv preprint arXiv:1704.00445*.

- Donoho, D. L. and Johnstone, J. M. (1994). Ideal spatial adaptation by wavelet shrinkage. *Biometrika*, **81** 425–455.
- Duan, Y., Jia, Z. and Wang, M. (2020). Minimax-optimal off-policy evaluation with linear function approximation. In *International Conference on Machine Learning*.
- Fan, J. and Li, R. (2001). Variable selection via nonconcave penalized likelihood and its oracle properties. *Journal of the American Statistical Association*, **96** 1348–1360.
- Fan, J., Wang, Z., Xie, Y. and Yang, Z. (2020). A theoretical analysis of deep Q-learning. In *Learning for Dynamics and Control*.
- Farahmand, A.-m., Ghavamzadeh, M., Szepesvári, C. and Mannor, S. (2016). Regularized policy iteration with nonparametric function spaces. *Journal of Machine Learning Research*, **17** 4809–4874.
- Farahmand, A.-m., Szepesvári, C. and Munos, R. (2010). Error propagation for approximate policy and value iteration. In *Advances in Neural Information Processing Systems*.
- Farajtabar, M., Chow, Y. and Ghavamzadeh, M. (2018). More robust doubly robust off-policy evaluation. In *International Conference on Machine Learning*.
- Fu, J., Kumar, A., Nachum, O., Tucker, G. and Levine, S. (2020a). D4RL: Datasets for deep data-driven reinforcement learning. *arXiv preprint arXiv:2004.07219*.
- Fu, Z., Yang, Z. and Wang, Z. (2020b). Single-timescale actor-critic provably finds globally optimal policy. *arXiv preprint arXiv:2008.00483*.
- Fujimoto, S., Meger, D. and Precup, D. (2019). Off-policy deep reinforcement learning without exploration. In *International Conference on Machine Learning*.
- Gottesman, O., Johansson, F., Komorowski, M., Faisal, A., Sontag, D., Doshi-Velez, F. and Celi, L. (2019). Guidelines for reinforcement learning in healthcare. *Nature Medicine*, **25** 16–32.
- Gulcehre, C., Wang, Z., Novikov, A., Paine, T. L., Colmenarejo, S. G., Zolna, K., Agarwal, R., Merel, J., Mankowitz, D., Paduraru, C. et al. (2020). RL Unplugged: Benchmarks for offline reinforcement learning. *arXiv preprint arXiv:2006.13888*.
- Houthooft, R., Chen, X., Duan, Y., Schulman, J., De Turck, F. and Abbeel, P. (2016). VIME: Variational information maximizing exploration. In *Advances in Neural Information Processing Systems*.

- Jaksch, T., Ortner, R. and Auer, P. (2010). Near-optimal regret bounds for reinforcement learning. *Journal of Machine Learning Research*, **11** 8–36.
- Jaques, N., Ghandeharioun, A., Shen, J. H., Ferguson, C., Lapedriza, A., Jones, N., Gu, S. and Picard, R. (2019). Way off-policy batch deep reinforcement learning of implicit human preferences in dialog. *arXiv preprint arXiv:1907.00456*.
- Jiang, N. and Huang, J. (2020). Minimax value interval for off-policy evaluation and policy optimization. In *Advances in Neural Information Processing Systems*.
- Jiang, N. and Li, L. (2016). Doubly robust off-policy value evaluation for reinforcement learning. In *International Conference on Machine Learning*.
- Jin, C., Allen-Zhu, Z., Bubeck, S. and Jordan, M. I. (2018). Is Q-learning provably efficient? In *Advances in Neural Information Processing Systems*.
- Jin, C., Yang, Z., Wang, Z. and Jordan, M. I. (2020). Provably efficient reinforcement learning with linear function approximation. In *Conference on Learning Theory*.
- Kallus, N. and Uehara, M. (2019). Efficiently breaking the curse of horizon in off-policy evaluation with double reinforcement learning. *arXiv preprint arXiv:1909.05850*.
- Kallus, N. and Uehara, M. (2020). Doubly robust off-policy value and gradient estimation for deterministic policies. *arXiv preprint arXiv:2006.03900*.
- Kidambi, R., Rajeswaran, A., Netrapalli, P. and Joachims, T. (2020). MOREL: Model-based offline reinforcement learning. *arXiv preprint arXiv:2005.05951*.
- Kumar, A., Fu, J., Soh, M., Tucker, G. and Levine, S. (2019). Stabilizing off-policy Q-learning via bootstrapping error reduction. In *Advances in Neural Information Processing Systems*.
- Kumar, A., Zhou, A., Tucker, G. and Levine, S. (2020). Conservative Q-learning for offline reinforcement learning. *arXiv preprint arXiv:2006.04779*.
- Lange, S., Gabel, T. and Riedmiller, M. (2012). Batch reinforcement learning. In *Reinforcement learning*. Springer, 45–73.
- Laroche, R., Trichelair, P. and Des Combes, R. T. (2019). Safe policy improvement with baseline bootstrapping. In *International Conference on Machine Learning*.
- Lattimore, T. and Szepesvári, C. (2020). *Bandit algorithms*. Cambridge.
- Le Cam, L. (2012). *Asymptotic methods in statistical decision theory*. Springer.

- LeCun, Y., Bengio, Y. and Hinton, G. (2015). Deep learning. *Nature*, **521** 436–444.
- Levine, S., Kumar, A., Tucker, G. and Fu, J. (2020). Offline reinforcement learning: Tutorial, review, and perspectives on open problems. *arXiv preprint arXiv:2005.01643*.
- Li, G., Wei, Y., Chi, Y., Gu, Y. and Chen, Y. (2020). Sample complexity of asynchronous Q-learning: Sharper analysis and variance reduction. *arXiv preprint arXiv:2006.03041*.
- Liao, P., Qi, Z. and Murphy, S. (2020). Batch policy learning in average reward Markov decision processes. *arXiv preprint arXiv:2007.11771*.
- Liu, B., Cai, Q., Yang, Z. and Wang, Z. (2019). Neural trust region/proximal policy optimization attains globally optimal policy. In *Advances in Neural Information Processing Systems*.
- Liu, Q., Li, L., Tang, Z. and Zhou, D. (2018). Breaking the curse of horizon: Infinite-horizon off-policy estimation. In *Advances in Neural Information Processing Systems*.
- Liu, Y., Swaminathan, A., Agarwal, A. and Brunskill, E. (2020). Provably good batch reinforcement learning without great exploration. *arXiv preprint arXiv:2007.08202*.
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., Graves, A., Riedmiller, M., Fidjeland, A. K., Ostrovski, G. et al. (2015). Human-level control through deep reinforcement learning. *Nature*, **518** 529–533.
- Munos, R. and Szepesvári, C. (2008). Finite-time bounds for fitted value iteration. *Journal of Machine Learning Research*, **9** 815–857.
- Nachum, O., Chow, Y., Dai, B. and Li, L. (2019a). DualDICE: Behavior-agnostic estimation of discounted stationary distribution corrections. In *Advances in Neural Information Processing Systems*.
- Nachum, O. and Dai, B. (2020). Reinforcement learning via Fenchel-Rockafellar duality. *arXiv preprint arXiv:2001.01866*.
- Nachum, O., Dai, B., Kostrikov, I., Chow, Y., Li, L. and Schuurmans, D. (2019b). AlgaeDICE: Policy gradient from arbitrary experience. *arXiv preprint arXiv:1912.02074*.
- Nair, A., Dalal, M., Gupta, A. and Levine, S. (2020). Accelerating online reinforcement learning with offline datasets. *arXiv preprint arXiv:2006.09359*.
- Osband, I. and Van Roy, B. (2014). Model-based reinforcement learning and the eluder dimension. In *Advances in Neural Information Processing Systems*.

- Qu, G. and Wierman, A. (2020). Finite-time analysis of asynchronous stochastic approximation and Q-learning. *arXiv preprint arXiv:2002.00260*.
- Russo, D. and Van Roy, B. (2013). Eluder dimension and the sample complexity of optimistic exploration. In *Advances in Neural Information Processing Systems*.
- Russo, D. and Van Roy, B. (2016). An information-theoretic analysis of Thompson sampling. *Journal of Machine Learning Research*, **17** 2442–2471.
- Russo, D. and Van Roy, B. (2018). Learning to optimize via information-directed sampling. *Operations Research*, **66** 230–252.
- Scherrer, B., Ghavamzadeh, M., Gabillon, V., Lesner, B. and Geist, M. (2015). Approximate modified policy iteration and its application to the game of Tetris. *Journal of Machine Learning Research*, **16** 1629–1676.
- Schmidhuber, J. (1991). Curious model-building control systems. In *International Joint Conference on Neural Networks*.
- Schmidhuber, J. (2010). Formal theory of creativity, fun, and intrinsic motivation (1990–2010). *IEEE Transactions on Autonomous Mental Development*, **2** 230–247.
- Shalev-Shwartz, S., Shammah, S. and Shashua, A. (2016). Safe, multi-agent, reinforcement learning for autonomous driving. *arXiv preprint arXiv:1610.03295*.
- Siegel, N. Y., Springenberg, J. T., Berkenkamp, F., Abdolmaleki, A., Neunert, M., Lampe, T., Hafner, R. and Riedmiller, M. (2020). Keep doing what worked: Behavioral modelling priors for offline reinforcement learning. *arXiv preprint arXiv:2002.08396*.
- Silver, D., Huang, A., Maddison, C. J., Guez, A., Sifre, L., Van Den Driessche, G., Schrittwieser, J., Antonoglou, I., Panneershelvam, V. and Lanctot, M. (2016). Mastering the game of Go with deep neural networks and tree search. *Nature*, **529** 484–489.
- Silver, D., Schrittwieser, J., Simonyan, K., Antonoglou, I., Huang, A., Guez, A., Hubert, T., Baker, L., Lai, M. and Bolton, A. (2017). Mastering the game of Go without human knowledge. *Nature*, **550** 354.
- Still, S. and Precup, D. (2012). An information-theoretic approach to curiosity-driven reinforcement learning. *Theory in Biosciences*, **131** 139–148.
- Sun, P., Kretschmar, H., Dotiwalla, X., Chouard, A., Patnaik, V., Tsui, P., Guo, J., Zhou, Y., Chai, Y., Caine, B. et al. (2020). Scalability in perception for autonomous driving: Waymo open dataset. In *Computer Vision and Pattern Recognition*.

- Sun, Y., Gomez, F. and Schmidhuber, J. (2011). Planning to be surprised: Optimal Bayesian exploration in dynamic environments. In *International Conference on Artificial General Intelligence*.
- Sutton, R. S. and Barto, A. G. (2018). *Reinforcement learning: An introduction*. MIT.
- Szepesvári, C. (2010). *Algorithms for reinforcement learning*. Morgan & Claypool.
- Tang, Z., Feng, Y., Li, L., Zhou, D. and Liu, Q. (2019). Doubly robust bias reduction in infinite horizon off-policy estimation. *arXiv preprint arXiv:1910.07186*.
- Thomas, P. and Brunskill, E. (2016). Data-efficient off-policy policy evaluation for reinforcement learning. In *International Conference on Machine Learning*.
- Todorov, E., Erez, T. and Tassa, Y. (2012). Mujoco: A physics engine for model-based control. In *International Conference on Intelligent Robots and Systems*.
- Tropp, J. A. (2015). An introduction to matrix concentration inequalities. *Foundations and Trends in Machine Learning*, **8** 1–230.
- Uehara, M., Huang, J. and Jiang, N. (2020). Minimax weight and Q-function learning for off-policy evaluation. In *International Conference on Machine Learning*.
- Vinyals, O., Ewalds, T., Bartunov, S., Georgiev, P., Vezhnevets, A. S., Yeo, M., Makhzani, A., Küttler, H., Agapiou, J., Schrittwieser, J. et al. (2017). StarCraft II: A new challenge for reinforcement learning. *arXiv preprint arXiv:1708.04782*.
- Wang, L., Cai, Q., Yang, Z. and Wang, Z. (2019). Neural policy gradient methods: Global optimality and rates of convergence. In *International Conference on Learning Representations*.
- Wang, R., Foster, D. P. and Kakade, S. M. (2020a). What are the statistical limits of offline RL with linear function approximation? *arXiv preprint arXiv:2010.11895*.
- Wang, R., Salakhutdinov, R. R. and Yang, L. (2020b). Reinforcement learning with general value function approximation: Provably efficient approach via bounded eluder dimension. In *Advances in Neural Information Processing Systems*.
- Wang, Z., Novikov, A., Zolna, K., Merel, J. S., Springenberg, J. T., Reed, S. E., Shahriari, B., Siegel, N., Gulcehre, C., Heess, N. et al. (2020c). Critic regularized regression. In *Advances in Neural Information Processing Systems*.
- Wu, Y., Tucker, G. and Nachum, O. (2019). Behavior regularized offline reinforcement learning. *arXiv preprint arXiv:1911.11361*.

- Xie, T. and Jiang, N. (2020a). Batch value-function approximation with only realizability. *arXiv preprint arXiv:2008.04990*.
- Xie, T. and Jiang, N. (2020b). Q^* -approximation schemes for batch reinforcement learning: A theoretical comparison. *arXiv preprint arXiv:2003.03924*.
- Xie, T., Ma, Y. and Wang, Y.-X. (2019). Towards optimal off-policy evaluation for reinforcement learning with marginalized importance sampling. In *Advances in Neural Information Processing Systems*.
- Yang, L. and Wang, M. (2019). Sample-optimal parametric Q-learning using linearly additive features. In *International Conference on Machine Learning*.
- Yang, M., Nachum, O., Dai, B., Li, L. and Schuurmans, D. (2020a). Off-policy evaluation via the regularized Lagrangian. In *Advances in Neural Information Processing Systems*.
- Yang, Z., Jin, C., Wang, Z., Wang, M. and Jordan, M. I. (2020b). Bridging exploration and general function approximation in reinforcement learning: Provably efficient kernel and neural value iterations. *arXiv preprint arXiv:2011.04622*.
- Yin, M., Bai, Y. and Wang, Y.-X. (2020). Near optimal provable uniform convergence in off-policy evaluation for reinforcement learning. *arXiv preprint arXiv:2007.03760*.
- Yin, M. and Wang, Y.-X. (2020). Asymptotically efficient off-policy evaluation for tabular reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*.
- Yu, B. (1997). Assouad, Fano, and Le Cam. In *Festschrift for Lucien Le Cam*. Springer, 423–435.
- Yu, T., Thomas, G., Yu, L., Ermon, S., Zou, J., Levine, S., Finn, C. and Ma, T. (2020). MOPO: Model-based offline policy optimization. *arXiv preprint arXiv:2005.13239*.
- Zhang, J., Koppel, A., Bedi, A. S., Szepesvári, C. and Wang, M. (2020a). Variational policy gradient method for reinforcement learning with general utilities. In *Advances in Neural Information Processing Systems*.
- Zhang, R., Dai, B., Li, L. and Schuurmans, D. (2020b). GenDICE: Generalized offline estimation of stationary values. In *International Conference on Learning Representations*.
- Zou, H. (2006). The adaptive Lasso and its oracle properties. *Journal of the American Statistical Association*, **101** 1418–1429.

A Proofs of Suboptimality Decomposition

Proof of Lemma 3.1. By the definition in Equation (2.6), the suboptimality of the policy $\hat{\pi}$ given any initial state $x \in \mathcal{S}$ can be decomposed as

$$\text{SubOpt}(\hat{\pi}; x) = \underbrace{(V_1^{\pi^*}(x) - \hat{V}_1(x))}_{(i)} + \underbrace{(\hat{V}_1(x) - V_1^{\hat{\pi}}(x))}_{(ii)}, \quad (\text{A.1})$$

where $\{\hat{V}_h\}_{h=1}^H$ are the estimated value functions constructed by the meta-algorithm. Term (i) in Equation (A.1) is the difference between the estimated value function \hat{V}_1 and the optimal value function $V_1^{\pi^*}$, while term (ii) is the difference between \hat{V}_1 and the value function $V_1^{\hat{\pi}}$ of $\hat{\pi}$. To further decompose terms (i) and (ii), we utilize the following lemma, which is obtained from Cai et al. (2020), to characterize the difference between an estimated value function and the value function of a policy.

Lemma A.1 (Extended Value Difference (Cai et al., 2020)). Let $\pi = \{\pi_h\}_{h=1}^H$ and $\pi' = \{\pi'_h\}_{h=1}^H$ be any two policies and let $\{\hat{Q}_h\}_{h=1}^H$ be any estimated Q-functions. For all $h \in [H]$, we define the estimated value function $\hat{V}_h: \mathcal{S} \rightarrow \mathbb{R}$ by setting $\hat{V}_h(x) = \langle \hat{Q}_h(x, \cdot), \pi_h(\cdot | x) \rangle_{\mathcal{A}}$ for all $x \in \mathcal{S}$. For all $x \in \mathcal{S}$, we have

$$\begin{aligned} \hat{V}_1(x) - V_1^{\pi'}(x) &= \sum_{h=1}^H \mathbb{E}_{\pi'} [\langle \hat{Q}_h(s_h, \cdot), \pi_h(\cdot | s_h) - \pi'_h(\cdot | s_h) \rangle_{\mathcal{A}} \mid s_1 = x] \\ &\quad + \sum_{h=1}^H \mathbb{E}_{\pi'} [\hat{Q}_h(s_h, a_h) - (\mathbb{B}_h \hat{V}_{h+1})(s_h, a_h) \mid s_1 = x], \end{aligned}$$

where $\mathbb{E}_{\pi'}$ is taken with respect to the trajectory generated by π' , while \mathbb{B}_h is the Bellman operator defined in Equation (2.4).

Proof. See Section B.1 in Cai et al. (2020) for a detailed proof. \square

Applying Lemma A.1 with $\pi = \hat{\pi}$, $\pi' = \pi^*$, and $\{\hat{Q}_h\}_{h=1}^H$ being the estimated Q-functions constructed by the meta-algorithm, we have

$$\begin{aligned} \hat{V}_1(x) - V_1^{\pi^*}(x) &= \sum_{h=1}^H \mathbb{E}_{\pi^*} [\langle \hat{Q}_h(s_h, \cdot), \hat{\pi}_h(\cdot | s_h) - \pi_h^*(\cdot | s_h) \rangle_{\mathcal{A}} \mid s_1 = x] \\ &\quad + \sum_{h=1}^H \mathbb{E}_{\pi^*} [\hat{Q}_h(s_h, a_h) - (\mathbb{B}_h \hat{V}_{h+1})(s_h, a_h) \mid s_1 = x], \end{aligned}$$

where \mathbb{E}_{π^*} is taken with respect to the trajectory generated by π^* . By the definition of the model evaluation error ι_h in Equation (3.1), we have

$$V_1^{\pi^*}(x) - \hat{V}_1(x) = \sum_{h=1}^H \mathbb{E}_{\pi^*} [\langle \hat{Q}_h(s_h, \cdot), \pi_h^*(\cdot | s_h) - \hat{\pi}_h(\cdot | s_h) \rangle_{\mathcal{A}} \mid s_1 = x] + \sum_{h=1}^H \mathbb{E}_{\pi^*} [\iota_h(s_h, a_h) \mid s_1 = x].$$

Similarly, applying Lemma A.1 with $\pi = \pi' = \hat{\pi}$ and $\{\hat{Q}_h\}_{h=1}^H$ being the estimated Q-functions constructed by the meta-algorithm, we have

$$\hat{V}_1(x) - V_1^{\hat{\pi}}(x) = \sum_{h=1}^H \mathbb{E}_{\hat{\pi}}[\hat{Q}_h(s_h, a_h) - (\mathbb{B}_h \hat{V}_{h+1})(s_h, a_h) \mid s_1 = x] = - \sum_{h=1}^H \mathbb{E}_{\hat{\pi}}[\iota_h(s_h, a_h) \mid s_1 = x],$$

where $\mathbb{E}_{\hat{\pi}}$ is taken with respect to the trajectory generated by $\hat{\pi}$. By Equation (A.1), we conclude the proof of Lemma 3.1. \square

B Proofs of Pessimistic Value Iteration

B.1 Proof of Lemma 5.1

Proof of Lemma 5.1. We first show that on the event \mathcal{E} defined in Equation (4.1), the model evaluation errors $\{\iota_h\}_{h=1}^H$ are nonnegative. In the sequel, we assume that \mathcal{E} holds. Recall the construction of \bar{Q}_h in Line 5 of Algorithm 1 for all $h \in [H]$. For all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$, if $\bar{Q}_h(x, a) < 0$, we have

$$\hat{Q}_h(x, a) = \min\{\bar{Q}_h(x, a), H - h + 1\}^+ = 0.$$

By the definition of ι_h in Equation (3.1), we have

$$\iota_h(x, a) = (\mathbb{B}_h \hat{V}_{h+1})(x, a) - \hat{Q}_h(x, a) = (\mathbb{B}_h \hat{V}_{h+1})(x, a) \geq 0,$$

as r_h and \hat{V}_{h+1} are nonnegative. Otherwise, if $\bar{Q}_h(x, a) \geq 0$, we have

$$\hat{Q}_h(x, a) = \min\{\bar{Q}_h(x, a), H - h + 1\}^+ \leq \bar{Q}_h(x, a).$$

As $\{\Gamma_h\}_{h=1}^H$ are ξ -uncertainty quantifiers, which are defined in Definition 4.1, we have

$$\iota_h(x, a) \geq (\mathbb{B}_h \hat{V}_{h+1})(x, a) - \bar{Q}_h(x, a) = (\mathbb{B}_h \hat{V}_{h+1})(x, a) - (\hat{\mathbb{B}}_h \hat{V}_{h+1})(x, a) + \Gamma_h(x, a) \geq 0.$$

Here the last inequality follows from the definition of \mathcal{E} in Equation (4.1). Therefore, we conclude the proof of $\iota_h(x, a) \geq 0$ for all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$ on \mathcal{E} .

It remains to establish the upper bound in Equation (5.1). For all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$, combining the definition of event \mathcal{E} in Equation (4.1) as well as the construction of \bar{Q}_h in Line 5 of Algorithm 1 gives

$$\bar{Q}_h(x, a) = (\hat{\mathbb{B}}_h \hat{V}_{h+1})(x, a) - \Gamma_h(x, a) \leq (\mathbb{B}_h \hat{V}_{h+1})(x, a) \leq H - h + 1,$$

where the first inequality follows from the triangle inequality, while the second inequality follows from the fact that $r_h \in [0, 1]$ and $\hat{V}_{h+1} \in [0, H - h]$. Hence, we have

$$\hat{Q}_h(x, a) = \min\{\bar{Q}_h(x, a), H - h + 1\}^+ = \max\{\bar{Q}_h(x, a), 0\} \geq \bar{Q}_h(x, a),$$

which by the definition of ι_h in Equation (3.1) implies

$$\begin{aligned}\iota_h(x, a) &= (\mathbb{B}_h \widehat{V}_{h+1})(x, a) - \widehat{Q}_h(x, a) \leq (\mathbb{B}_h \widehat{V}_{h+1})(x, a) - \overline{Q}_h(x, a) \\ &= (\mathbb{B}_h \widehat{V}_{h+1})(x, a) - (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) + \Gamma_h(x, a) \leq 2\Gamma_h(x, a).\end{aligned}$$

Here the last inequality follows from the definition of \mathcal{E} in Equation (4.1). Therefore, we complete the proof of $\iota_h(x, a) \leq 2\Gamma_h(x, a)$ for all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$ on \mathcal{E} .

In summary, we conclude that on \mathcal{E} ,

$$0 \leq \iota_h(x, a) \leq 2\Gamma_h(x, a), \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H].$$

Therefore, we conclude the proof of Lemma 5.1. \square

B.2 Proof of Lemma 5.2

Proof of Lemma 5.2. It suffices to show that under Assumption 2.2, the event \mathcal{E} defined in Equation (4.1) satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}) \geq 1 - \xi$ with the ξ -uncertainty quantifiers $\{\Gamma_h\}_{h=1}^H$ defined in Equation (4.7). To this end, we upper bound the difference between $(\mathbb{B}_h \widehat{V}_{h+1})(x, a)$ and $(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a)$ for all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$, where the Bellman operator \mathbb{B}_h is defined in Equation (2.4), the estimated Bellman operator $\widehat{\mathbb{B}}_h$ is defined in Equation (4.5), and the estimated value function \widehat{V}_{h+1} is constructed in Line 10 of Algorithm 2.

For any function $V: \mathcal{S} \rightarrow [0, H]$, Definition 4.3 ensures that $\mathbb{P}_h V$ and $\mathbb{B}_h V$ are linear in the feature map ϕ for all $h \in [H]$. To see this, note that Equation (4.4) implies

$$(\mathbb{P}_h V)(x, a) = \left\langle \phi(x, a), \int_{\mathcal{S}} V(x') \mu_h(x') dx' \right\rangle, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H].$$

Also, Equation (4.4) ensures that the expected reward is linear in ϕ for all $h \in [H]$, which implies

$$(\mathbb{B}_h V)(x, a) = \langle \phi(x, a), \theta_h \rangle + \left\langle \phi(x, a), \int_{\mathcal{S}} V(x') \mu_h(x') dx' \right\rangle, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]. \quad (\text{B.1})$$

Hence, there exists an unknown vector $w_h \in \mathbb{R}^d$ such that

$$(\mathbb{B}_h \widehat{V}_{h+1})(x, a) = \phi(x, a)^\top w_h, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]. \quad (\text{B.2})$$

Recall the definition of \widehat{w}_h in Equation (4.6) and the construction of $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ in Equation (4.5). The following lemma upper bounds the norms of w_h and \widehat{w}_h , respectively.

Lemma B.1 (Bounded Weights of Value Functions). Let $V_{\max} > 0$ be an absolute constant. For any function $V: \mathcal{S} \rightarrow [0, V_{\max}]$ and any $h \in [H]$, we have

$$\|w_h\| \leq (1 + V_{\max})\sqrt{d}, \quad \|\widehat{w}_h\| \leq H\sqrt{Kd/\lambda},$$

where w_h and \widehat{w}_h are defined in Equations (B.2) and (4.6), respectively.

Proof of Lemma B.1. For all $h \in [H]$, Equations (B.1) and (B.2) imply

$$w_h = \theta_h + \int_{\mathcal{S}} V(x') \mu_h(x') dx'.$$

By the triangle inequality and the fact that $\|\mu_h(\mathcal{S})\| \leq \sqrt{d}$ in Definition 4.3 with the notation $\|\mu_h(\mathcal{S})\| = \int_{\mathcal{S}} \|\mu_h(x')\| dx'$, we have

$$\begin{aligned} \|w_h\| &\leq \|\theta_h\| + \left\| \int_{\mathcal{S}} V(x') \mu_h(x') dx' \right\| \leq \|\theta_h\| + \int_{\mathcal{S}} \|V(x') \mu_h(x')\| dx' \\ &\leq \sqrt{d} + V_{\max} \cdot \|\mu_h(\mathcal{S})\| \leq (1 + V_{\max}) \sqrt{d}, \end{aligned} \quad (\text{B.3})$$

where the third inequality follows from the fact that $V \in [0, V_{\max}]$.

Meanwhile, by the definition of \widehat{w}_h in Equation (4.6) and the triangle inequality, we have

$$\begin{aligned} \|\widehat{w}_h\| &= \left\| \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)) \right) \right\| \\ &\leq \sum_{\tau=1}^K \left\| \Lambda_h^{-1} \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)) \right\|. \end{aligned}$$

Note that $|r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)| \leq H$, which follows from the fact that $r_h^\tau \in [0, 1]$ and $\widehat{V}_{h+1} \in [0, H-1]$ by Line 10 of Algorithm 2. Also, note that $\Lambda_h \succeq \lambda \cdot I$, which follows from the definition of Λ_h in Equation (4.6). Hence, we have

$$\begin{aligned} \|\widehat{w}_h\| &\leq H \cdot \sum_{\tau=1}^K \|\Lambda_h^{-1} \phi(x_h^\tau, a_h^\tau)\| = H \cdot \sum_{\tau=1}^K \sqrt{\phi(x_h^\tau, a_h^\tau)^\top \Lambda_h^{-1/2} \Lambda_h^{-1} \Lambda_h^{-1/2} \phi(x_h^\tau, a_h^\tau)} \\ &\leq \frac{H}{\sqrt{\lambda}} \cdot \sum_{\tau=1}^K \sqrt{\phi(x_h^\tau, a_h^\tau)^\top \Lambda_h^{-1} \phi(x_h^\tau, a_h^\tau)}, \end{aligned}$$

where the last inequality follows from the fact that $\|\Lambda_h^{-1}\|_{\text{op}} \leq \lambda^{-1}$. Here $\|\cdot\|_{\text{op}}$ denotes the matrix operator norm. By the Cauchy-Schwarz inequality, we have

$$\begin{aligned} \|\widehat{w}_h\| &\leq H \sqrt{K/\lambda} \cdot \sqrt{\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau)^\top \Lambda_h^{-1} \phi(x_h^\tau, a_h^\tau)} = H \sqrt{K/\lambda} \cdot \sqrt{\text{Tr} \left(\Lambda_h^{-1} \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top \right)} \\ &= H \sqrt{K/\lambda} \cdot \sqrt{\text{Tr}(\Lambda_h^{-1} (\Lambda_h - \lambda \cdot I))} \leq H \sqrt{K/\lambda} \cdot \sqrt{\text{Tr}(\Lambda_h^{-1} \Lambda_h)} = H \sqrt{Kd/\lambda}, \end{aligned} \quad (\text{B.4})$$

where the second equality follows from the definition of Λ_h in Equation (4.6).

Therefore, combining Equations (B.3) and (B.4), we conclude the proof of Lemma B.1. \square

We upper bound the difference between $\mathbb{B}_h \widehat{V}_{h+1}$ and $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$. For all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$, we have

$$\begin{aligned}
(\mathbb{B}_h \widehat{V}_{h+1})(x, a) - (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) &= \phi(x, a)^\top (w_h - \widehat{w}_h) \\
&= \phi(x, a)^\top w_h - \phi(x, a)^\top \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau)) \right) \\
&= \underbrace{\phi(x, a)^\top w_h - \phi(x, a)^\top \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (\mathbb{B}_h \widehat{V}_{h+1})(x_h^\tau, a_h^\tau) \right)}_{(i)} \\
&\quad - \underbrace{\phi(x, a)^\top \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (r_h^\tau + \widehat{V}_{h+1}(x_{h+1}^\tau) - (\mathbb{B}_h \widehat{V}_{h+1})(x_h^\tau, a_h^\tau)) \right)}_{(ii)}.
\end{aligned} \tag{B.5}$$

Here the first equality follows from the definition of the Bellman operator \mathbb{B}_h in Equation (2.4), the decomposition of \mathbb{B}_h in Equation (B.1), and the definition of the estimated Bellman operator $\widehat{\mathbb{B}}_h$ in Equation (4.5), while the second equality follows from the definition of \widehat{w}_h in Equation (4.6). By the triangle inequality, we have

$$|(\mathbb{B}_h \widehat{V}_{h+1})(x, a) - (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a)| \leq |(i)| + |(ii)|.$$

In the sequel, we upper bound terms (i) and (ii) respectively. By the construction of the estimated value function \widehat{V}_{h+1} in Line 10 of Algorithm 2, we have $\widehat{V}_{h+1} \in [0, H-1]$. By Lemma B.1, we have $\|w_h\| \leq H\sqrt{d}$. Hence, term (i) defined in Equation (B.5) is upper bounded by

$$\begin{aligned}
|(i)| &= \left| \phi(x, a)^\top w_h - \phi(x, a)^\top \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top w_h \right) \right| \\
&= \left| \phi(x, a)^\top w_h - \phi(x, a)^\top \Lambda_h^{-1} (\Lambda_h - \lambda \cdot I) w_h \right| = \lambda \cdot \left| \phi(x, a)^\top \Lambda_h^{-1} w_h \right| \\
&\leq \lambda \cdot \|w_h\|_{\Lambda_h^{-1}} \cdot \|\phi(x, a)\|_{\Lambda_h} \leq H\sqrt{d\lambda} \cdot \sqrt{\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a)}.
\end{aligned} \tag{B.6}$$

Here the second equality follows from the definition of Λ_h in Equation (4.6). Also, the first inequality follows from the Cauchy-Schwarz inequality, while the last inequality follows from the fact that

$$\|w_h\|_{\Lambda_h^{-1}} = \sqrt{w_h^\top \Lambda_h^{-1} w_h} \leq \|\Lambda_h^{-1}\|_{\text{op}}^{1/2} \cdot \|w_h\| \leq H\sqrt{d/\lambda}.$$

Here $\|\cdot\|_{\text{op}}$ denotes the matrix operator norm and we use the fact that $\|\Lambda_h^{-1}\|_{\text{op}} \leq \lambda^{-1}$.

It remains to upper bound term (ii). For notational simplicity, for any $h \in [H]$, any $\tau \in [K]$, and any function $V: \mathcal{S} \rightarrow [0, H]$, we define the random variable

$$\epsilon_h^\tau(V) = r_h^\tau + V(x_{h+1}^\tau) - (\mathbb{B}_h V)(x_h^\tau, a_h^\tau). \tag{B.7}$$

By the Cauchy-Schwarz inequality, term (ii) defined in Equation (B.5) is upper bounded by

$$\begin{aligned}
|(\text{ii})| &= \left| \phi(x, a)^\top \Lambda_h^{-1} \left(\sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right) \right| \\
&\leq \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right\|_{\Lambda_h^{-1}} \cdot \|\phi(x, a)\|_{\Lambda_h^{-1}} \\
&= \underbrace{\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right\|_{\Lambda_h^{-1}}}_{(\text{iii})} \cdot \sqrt{\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a)}. \tag{B.8}
\end{aligned}$$

In the sequel, we upper bound term (iii) via concentration inequalities. An obstacle is that \widehat{V}_{h+1} depends on $\{(x_h^\tau, a_h^\tau)\}_{\tau=1}^K$ via $\{(x_{h'}^\tau, a_{h'}^\tau)\}_{\tau \in [K], h' > h}$, as it is constructed based on the dataset \mathcal{D} . To this end, we resort to uniform concentration inequalities to upper bound

$$\sup_{V \in \mathcal{V}_{h+1}(R, B, \lambda)} \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|$$

for each $h \in [H]$, where it holds that $\widehat{V}_{h+1} \in \mathcal{V}_{h+1}(R, B, \lambda)$. Here for all $h \in [H]$, we define the function class

$$\begin{aligned}
\mathcal{V}_h(R, B, \lambda) &= \{V_h(x; \theta, \beta, \Sigma) : \mathcal{S} \rightarrow [0, H] \text{ with } \|\theta\| \leq R, \beta \in [0, B], \Sigma \succeq \lambda \cdot I\}, \\
\text{where } V_h(x; \theta, \beta, \Sigma) &= \max_{a \in \mathcal{A}} \left\{ \min \left\{ \phi(x, a)^\top \theta - \beta \cdot \sqrt{\phi(x, a)^\top \Sigma^{-1} \phi(x, a)}, H - h + 1 \right\}^+ \right\}. \tag{B.9}
\end{aligned}$$

For all $\varepsilon > 0$ and all $h \in [H]$, let $\mathcal{N}_h(\varepsilon; R, B, \lambda)$ be the minimal ε -cover of $\mathcal{V}_h(R, B, \lambda)$ with respect to the supremum norm. In other words, for any function $V \in \mathcal{V}_h(R, B, \lambda)$, there exists a function $V^\dagger \in \mathcal{N}_h(\varepsilon; R, B, \lambda)$ such that

$$\sup_{x \in \mathcal{S}} |V(x) - V^\dagger(x)| \leq \varepsilon.$$

Meanwhile, among all ε -covers of $\mathcal{V}_h(R, B, \lambda)$ defined by such a property, we choose $\mathcal{N}_h(\varepsilon; R, B, \lambda)$ as the one with the minimal cardinality.

By Lemma B.1, we have $\|\widehat{w}_h\| \leq H\sqrt{Kd/\lambda}$. Hence, for all $h \in [H]$, we have

$$\widehat{V}_{h+1} \in \mathcal{V}_{h+1}(R_0, B_0, \lambda), \quad \text{where } R_0 = H\sqrt{Kd/\lambda}, \quad B_0 = 2\beta.$$

Here $\lambda > 0$ is the regularization parameter and $\beta > 0$ is the scaling parameter, which are specified in Algorithm 2. For notational simplicity, we use \mathcal{V}_{h+1} and $\mathcal{N}_{h+1}(\varepsilon)$ to denote $\mathcal{V}_{h+1}(R_0, B_0, \lambda)$ and $\mathcal{N}_{h+1}(\varepsilon; R_0, B_0, \lambda)$, respectively. As it holds that $\widehat{V}_{h+1} \in \mathcal{V}_{h+1}$ and $\mathcal{N}_{h+1}(\varepsilon)$ is an ε -cover of \mathcal{V}_{h+1} , there exists a function $V_{h+1}^\dagger \in \mathcal{N}_{h+1}(\varepsilon)$ such that

$$\sup_{x \in \mathcal{S}} |\widehat{V}_{h+1}(x) - V_{h+1}^\dagger(x)| \leq \varepsilon. \tag{B.10}$$

Hence, given V_{h+1}^\dagger and \widehat{V}_{h+1} , the monotonicity of conditional expectations implies

$$\begin{aligned} & |(\mathbb{P}_h V_{h+1}^\dagger)(x, a) - (\mathbb{P}_h \widehat{V}_{h+1})(x, a)| \\ &= \left| \mathbb{E}[V_{h+1}^\dagger(s_{h+1}) \mid s_h = x, a_h = a] - \mathbb{E}[\widehat{V}_{h+1}(s_{h+1}) \mid s_h = x, a_h = a] \right| \\ &\leq \mathbb{E} \left[|V_{h+1}^\dagger(s_{h+1}) - \widehat{V}_{h+1}(s_{h+1})| \mid s_h = x, a_h = a \right] \leq \varepsilon, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]. \end{aligned} \quad (\text{B.11})$$

Here the conditional expectation is induced by the transition kernel $\mathcal{P}_h(\cdot \mid x, a)$. Combining Equation (B.11) and the definition of the Bellman operator \mathbb{B}_h in Equation (2.4), we have

$$|(\mathbb{B}_h V_{h+1}^\dagger)(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a)| \leq \varepsilon, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]. \quad (\text{B.12})$$

By the triangle inequality, Equations (B.10) and (B.12) imply

$$\left| (r_h(x, a) + \widehat{V}_{h+1}(x') - (\mathbb{B}_h \widehat{V}_{h+1})(x, a)) - (r_h(x, a) + V_{h+1}^\dagger(x') - (\mathbb{B}_h V_{h+1}^\dagger)(x, a)) \right| \leq 2\varepsilon \quad (\text{B.13})$$

for all $h \in [H]$ and all $(x, a, x') \in \mathcal{S} \times \mathcal{A} \times \mathcal{S}$. Setting $(x, a, x') = (x_h^\tau, a_h^\tau, x_{h+1}^\tau)$ in Equation (B.13), we have

$$|\epsilon_h^\tau(\widehat{V}_{h+1}) - \epsilon_h^\tau(V_{h+1}^\dagger)| \leq 2\varepsilon, \quad \forall \tau \in [K], \forall h \in [H]. \quad (\text{B.14})$$

Also, recall the definition of term (iii) in Equation (B.8). By the Cauchy-Schwarz inequality, for any two vectors $a, b \in \mathbb{R}^d$ and any positive definite matrix $\Lambda \in \mathbb{R}_+^{d \times d}$, it holds that $\|a + b\|_\Lambda^2 \leq 2 \cdot \|a\|_\Lambda^2 + 2 \cdot \|b\|_\Lambda^2$. Hence, for all $h \in [H]$, we have

$$|(\text{iii})|^2 \leq 2 \cdot \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V_{h+1}^\dagger) \right\|_{\Lambda_h^{-1}}^2 + 2 \cdot \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (\epsilon_h^\tau(\widehat{V}_{h+1}) - \epsilon_h^\tau(V_{h+1}^\dagger)) \right\|_{\Lambda_h^{-1}}^2. \quad (\text{B.15})$$

The second term on the right-hand side of Equation (B.15) is upper bounded by

$$\begin{aligned} & 2 \cdot \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (\epsilon_h^\tau(\widehat{V}_{h+1}) - \epsilon_h^\tau(V_{h+1}^\dagger)) \right\|_{\Lambda_h^{-1}}^2 \\ &= 2 \cdot \sum_{\tau, \tau'=1}^K \phi(x_h^\tau, a_h^\tau)^\top \Lambda_h^{-1} \phi(x_h^{\tau'}, a_h^{\tau'}) \cdot (\epsilon_h^\tau(\widehat{V}_{h+1}) - \epsilon_h^\tau(V_{h+1}^\dagger)) \cdot (\epsilon_h^{\tau'}(\widehat{V}_{h+1}) - \epsilon_h^{\tau'}(V_{h+1}^\dagger)) \\ &\leq 8\varepsilon^2 \cdot \sum_{\tau, \tau'=1}^K |\phi(x_h^\tau, a_h^\tau)^\top \Lambda_h^{-1} \phi(x_h^{\tau'}, a_h^{\tau'})| \leq 8\varepsilon^2 \cdot \sum_{\tau, \tau'=1}^K \|\phi(x_h^\tau, a_h^\tau)\| \cdot \|\phi(x_h^{\tau'}, a_h^{\tau'})\| \cdot \|\Lambda_h^{-1}\|_{\text{op}}, \end{aligned}$$

where the first inequality follows from Equation (B.14). As it holds that $\Lambda_h \succeq \lambda \cdot I$ by the definition of Λ_h in Equation (4.6) and $\|\phi(x, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$ by Definition 4.3, for all $h \in [H]$, we have

$$2 \cdot \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot (\epsilon_h^\tau(\widehat{V}_{h+1}) - \epsilon_h^\tau(V_{h+1}^\dagger)) \right\|_{\Lambda_h^{-1}}^2 \leq 8\varepsilon^2 K^2 / \lambda. \quad (\text{B.16})$$

Combining Equations (B.15) and (B.16), for all $h \in [H]$, we have

$$|(\text{iii})|^2 \leq 2 \cdot \sup_{V \in \mathcal{N}_{h+1}(\varepsilon)} \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 + 8\varepsilon^2 K^2 / \lambda. \quad (\text{B.17})$$

Note that the right-hand side of Equation (B.17) does not involve the estimated value functions \hat{Q}_h and \hat{V}_{h+1} , which are constructed based on the dataset \mathcal{D} . Hence, it allows us to upper bound the first term via uniform concentration inequalities. We utilize the following lemma to characterize the first term for any fixed function $V \in \mathcal{N}_{h+1}(\varepsilon)$. Recall the definition of $\epsilon_h^\tau(V)$ in Equation (B.7). Also recall that $\mathbb{P}_{\mathcal{D}}$ is the joint distribution of the data collecting process.

Lemma B.2 (Concentration of Self-Normalized Processes). Let $V : \mathcal{S} \rightarrow [0, H-1]$ be any fixed function. Under Assumption 2.2, for any fixed $h \in [H]$ and any $\delta \in (0, 1)$, we have

$$\mathbb{P}_{\mathcal{D}} \left(\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 > H^2 \cdot (2 \cdot \log(1/\delta) + d \cdot \log(1 + K/\lambda)) \right) \leq \delta.$$

Proof of Lemma B.2. For the fixed $h \in [H]$ and all $\tau \in \{0, \dots, K\}$, we define the σ -algebra

$$\mathcal{F}_{h,\tau} = \sigma(\{(x_h^j, a_h^j)\}_{j=1}^{(\tau+1) \wedge K} \cup \{(r_h^j, x_{h+1}^j)\}_{j=1}^\tau),$$

where $\sigma(\cdot)$ denotes the σ -algebra generated by a set of random variables and $(\tau+1) \wedge K$ denotes $\min\{\tau+1, K\}$. For all $\tau \in [K]$, we have $\phi(x_h^\tau, a_h^\tau) \in \mathcal{F}_{h,\tau-1}$, as (x_h^τ, a_h^τ) is $\mathcal{F}_{h,\tau-1}$ -measurable. Also, for the fixed function $V : \mathcal{S} \rightarrow [0, H-1]$ and all $\tau \in [K]$, we have

$$\epsilon_h^\tau(V) = r_h^\tau + V(x_{h+1}^\tau) - (\mathbb{B}_h V)(x_h^\tau, a_h^\tau) \in \mathcal{F}_{h,\tau},$$

as (r_h^τ, x_{h+1}^τ) is $\mathcal{F}_{h,\tau}$ -measurable. Hence, $\{\epsilon_h^\tau(V)\}_{\tau=1}^K$ is a stochastic process adapted to the filtration $\{\mathcal{F}_{h,\tau}\}_{\tau=0}^K$. By Assumption 2.2, we have

$$\begin{aligned} \mathbb{E}_{\mathcal{D}}[\epsilon_h^\tau(V) \mid \mathcal{F}_{h,\tau-1}] &= \mathbb{E}_{\mathcal{D}}[r_h^\tau + V(x_{h+1}^\tau) \mid \{(x_h^j, a_h^j)\}_{j=1}^\tau, \{(r_h^j, x_{h+1}^j)\}_{j=1}^{\tau-1}] - (\mathbb{B}_h V)(x_h^\tau, a_h^\tau) \\ &= \mathbb{E}[r_h(s_h, a_h) + V(s_{h+1}) \mid s_h = x_h^\tau, a_h = a_h^\tau] - (\mathbb{B}_h V)(x_h^\tau, a_h^\tau) = 0, \end{aligned}$$

where the second equality follows from Equation (2.7) and the last equality follows from the definition of the Bellman operator \mathbb{B}_h in Equation (2.4). Here $\mathbb{E}_{\mathcal{D}}$ is taken with respect to $\mathbb{P}_{\mathcal{D}}$, while \mathbb{E} is taken with respect to the immediate reward and next state in the underlying MDP.

Moreover, as it holds that $r_h^\tau \in [0, 1]$ and $V \in [0, H-1]$, we have $r_h^\tau + V(x_{h+1}^\tau) \in [0, H]$. Meanwhile, we have $(\mathbb{B}_h V)(x_h^\tau, a_h^\tau) \in [0, H]$, which implies $|\epsilon_h^\tau(V)| \leq H$. Hence, for the fixed $h \in [H]$ and all $\tau \in [K]$, the random variable $\epsilon_h^\tau(V)$ defined in Equation (B.7) is mean-zero and H -sub-Gaussian conditioning on $\mathcal{F}_{h,\tau-1}$.

We invoke Lemma [D.2](#) with $M_0 = \lambda \cdot I$ and $M_k = \lambda \cdot I + \sum_{\tau=1}^k \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top$ for all $k \in [K]$. For the fixed function $V: \mathcal{S} \rightarrow [0, H-1]$ and fixed $h \in [H]$, we have

$$\mathbb{P}_{\mathcal{D}} \left(\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 > 2H^2 \cdot \log \left(\frac{\det(\Lambda_h)^{1/2}}{\delta \cdot \det(\lambda \cdot I)^{1/2}} \right) \right) \leq \delta$$

for all $\delta \in (0, 1)$. Here we use the fact that $M_K = \Lambda_h$. Note that $\|\phi(x, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$ by Definition [4.3](#). We have

$$\|\Lambda_h\|_{\text{op}} = \left\| \lambda \cdot I + \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top \right\|_{\text{op}} \leq \lambda + \sum_{\tau=1}^K \|\phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top\|_{\text{op}} \leq \lambda + K,$$

where $\|\cdot\|_{\text{op}}$ denotes the matrix operator norm. Hence, it holds that $\det(\Lambda_h) \leq (\lambda + K)^d$ and $\det(\lambda \cdot I) = \lambda^d$, which implies

$$\begin{aligned} \mathbb{P}_{\mathcal{D}} \left(\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 > H^2 \cdot (2 \cdot \log(1/\delta) + d \cdot \log(1 + K/\lambda)) \right) \\ \leq \mathbb{P}_{\mathcal{D}} \left(\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 > 2H^2 \cdot \log \left(\frac{\det(\Lambda_h)^{1/2}}{\delta \cdot \det(\lambda \cdot I)^{1/2}} \right) \right) \leq \delta. \end{aligned}$$

Therefore, we conclude the proof of Lemma [B.2](#). \square

Applying Lemma [B.2](#) and the union bound, for any fixed $h \in [H]$, we have

$$\mathbb{P}_{\mathcal{D}} \left(\sup_{V \in \mathcal{N}_{h+1}(\varepsilon)} \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 > H^2 \cdot (2 \cdot \log(1/\delta) + d \cdot \log(1 + K/\lambda)) \right) \leq \delta \cdot |\mathcal{N}_{h+1}(\varepsilon)|.$$

For all $\xi \in (0, 1)$ and all $\varepsilon > 0$, we set $\delta = \xi / (H \cdot |\mathcal{N}_{h+1}(\varepsilon)|)$. Hence, for any fixed $h \in [H]$, it holds that

$$\begin{aligned} \sup_{V \in \mathcal{N}_{h+1}(\varepsilon)} \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(V) \right\|_{\Lambda_h^{-1}}^2 \\ \leq H^2 \cdot \left(2 \cdot \log(H \cdot |\mathcal{N}_{h+1}(\varepsilon)|/\xi) + d \cdot \log(1 + K/\lambda) \right) \end{aligned} \quad (\text{B.18})$$

with probability at least $1 - \xi/H$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Combining Equations [\(B.17\)](#) and [\(B.18\)](#), we have

$$\begin{aligned} \mathbb{P}_{\mathcal{D}} \left(\bigcap_{h \in [H]} \left\{ \left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\hat{V}_{h+1}) \right\|_{\Lambda_h^{-1}}^2 \right. \right. \\ \left. \left. \leq 2H^2 \cdot \left(2 \cdot \log(H \cdot |\mathcal{N}_{h+1}(\varepsilon)|/\xi) + d \cdot \log(1 + K/\lambda) \right) + 8\varepsilon^2 K^2 / \lambda \right\} \right) \geq 1 - \xi, \end{aligned} \quad (\text{B.19})$$

which follows from the union bound.

It remains to choose a proper $\varepsilon > 0$ and upper bound the ε -covering number $|\mathcal{N}_{h+1}(\varepsilon)|$. In the sequel, we set $\varepsilon = dH/K$ and $\lambda = 1$. By Equation (B.19), for all $h \in [H]$, it holds that

$$\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right\|_{\Lambda_h^{-1}}^2 \leq 2H^2 \cdot \left(2 \cdot \log(H \cdot |\mathcal{N}_{h+1}(\varepsilon)|/\xi) + d \cdot \log(1+K) + 4d^2 \right) \quad (\text{B.20})$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. To upper bound $|\mathcal{N}_{h+1}(\varepsilon)|$, we utilize the following lemma, which is obtained from Jin et al. (2020). Recall the definition of the function class $\mathcal{V}_h(R, B, \lambda)$ in Equation (B.9). Also, recall that $\mathcal{N}_h(\varepsilon; R, B, \lambda)$ is the minimal ε -cover of $\mathcal{V}_h(R, B, \lambda)$ with respect to the supremum norm.

Lemma B.3 (ε -Covering Number (Jin et al., 2020)). For all $h \in [H]$ and all $\varepsilon > 0$, we have

$$\log |\mathcal{N}_h(\varepsilon; R, B, \lambda)| \leq d \cdot \log(1 + 4R/\varepsilon) + d^2 \cdot \log(1 + 8d^{1/2}B^2/(\varepsilon^2\lambda)).$$

Proof of Lemma B.3. See Lemma D.6 in Jin et al. (2020) for a detailed proof. \square

Recall that

$$\widehat{V}_{h+1} \in \mathcal{V}_{h+1}(R_0, B_0, \lambda), \quad \text{where } R_0 = H\sqrt{Kd/\lambda}, \quad B_0 = 2\beta, \quad \lambda = 1, \quad \beta = c \cdot dH\sqrt{\zeta}.$$

Here $c > 0$ is an absolute constant, $\xi \in (0, 1)$ is the confidence parameter, and $\zeta = \log(2dHK/\xi)$ is specified in Algorithm 2. Recall that $\mathcal{N}_{h+1}(\varepsilon) = \mathcal{N}_{h+1}(\varepsilon; R_0, B_0, \lambda)$ is the minimal ε -cover of $\mathcal{V}_{h+1} = \mathcal{V}_{h+1}(R_0, B_0, \lambda)$ with respect to the supremum norm. Applying Lemma B.3 with $\varepsilon = dH/K$, we have

$$\begin{aligned} \log |\mathcal{N}_{h+1}(\varepsilon)| &\leq d \cdot \log(1 + 4d^{-1/2}K^{3/2}) + d^2 \cdot \log(1 + 32c^2 \cdot d^{1/2}K^2\zeta) \\ &\leq d \cdot \log(1 + 4d^{1/2}K^2) + d^2 \cdot \log(1 + 32c^2 \cdot d^{1/2}K^2\zeta). \end{aligned} \quad (\text{B.21})$$

As it holds that $\zeta > 1$, we set $c \geq 1$ to ensure that the second term on the right-hand side of Equation (B.21) is the dominating term, where $32c^2 \cdot d^{1/2}K^2\zeta \geq 1$. Hence, we have

$$\log |\mathcal{N}_{h+1}(\varepsilon)| \leq 2d^2 \cdot \log(1 + 32c^2 \cdot d^{1/2}K^2\zeta) \leq 2d^2 \cdot \log(64c^2 \cdot d^{1/2}K^2\zeta). \quad (\text{B.22})$$

By Equations (B.20) and (B.22), for all $h \in [H]$, it holds that

$$\begin{aligned} &\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right\|_{\Lambda_h^{-1}}^2 \\ &\leq 2H^2 \cdot \left(2 \cdot \log(H/\xi) + 4d^2 \cdot \log(64c^2 \cdot d^{1/2}K^2\zeta) + d \cdot \log(1+K) + 4d^2 \right) \end{aligned} \quad (\text{B.23})$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Note that $\log(1+K) \leq \log(2K) \leq \zeta$ and $\log \zeta \leq \zeta$. Hence, we have

$$\begin{aligned} &2 \cdot \log(H/\xi) + 4d^2 \cdot \log(d^{1/2}K^2\zeta) + d \cdot \log(1+K) + 4d^2 \\ &\leq 2d^2 \cdot \log(dHK^4/\xi) + d\zeta + 8d^2\zeta \leq 18d^2\zeta. \end{aligned}$$

As it holds that $\zeta > 1$ and $\log \zeta \leq \zeta$, Equation (B.23) implies

$$\left\| \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \cdot \epsilon_h^\tau(\widehat{V}_{h+1}) \right\|_{\Lambda_h^{-1}}^2 \leq d^2 H^2 \zeta \cdot (36 + 8 \cdot \log(64c^2)). \quad (\text{B.24})$$

We set $c \geq 1$ to be sufficiently large, which ensures that $36 + 8 \cdot \log(64c^2) \leq c^2/4$ on the right-hand side of Equation (B.24). By Equations (B.8) and (B.24), for all $h \in [H]$, it holds that

$$|(\text{ii})| \leq c/2 \cdot dH\sqrt{\zeta} \cdot \sqrt{\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a)} = \beta/2 \cdot \sqrt{\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a)} \quad (\text{B.25})$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$.

By Equations (4.7), (B.5), (B.6), and (B.25), for all $h \in [H]$ and all $(x, a) \in \mathcal{S} \times \mathcal{A}$, it holds that

$$|(\mathbb{B}_h \widehat{V}_{h+1})(x, a) - (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a)| \leq (H\sqrt{d} + \beta/2) \cdot \sqrt{\phi(x, a)^\top \Lambda_h^{-1} \phi(x, a)} \leq \Gamma_h(x, a)$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. In other words, $\{\Gamma_h\}_{h=1}^H$ defined in Equation (4.7) are ξ -uncertainty quantifiers. Therefore, we conclude the proof of Lemma 5.2. \square

B.3 Proof of Corollary 4.5

Proof of Corollary 4.5. By the Cauchy-Schwarz inequality, we have

$$\begin{aligned} & \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x \right] \\ &= \mathbb{E}_{\pi^*} \left[\sqrt{\text{Tr}(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h))} \mid s_1 = x \right] \\ &= \mathbb{E}_{\pi^*} \left[\sqrt{\text{Tr}(\phi(s_h, a_h) \phi(s_h, a_h)^\top \Lambda_h^{-1})} \mid s_1 = x \right] \\ &\leq \sqrt{\text{Tr}(\mathbb{E}_{\pi^*} [\phi(s_h, a_h) \phi(s_h, a_h)^\top \mid s_1 = x] \Lambda_h^{-1})} \end{aligned} \quad (\text{B.26})$$

for all $x \in \mathcal{S}$ and all $h \in [H]$. We define the event

$$\mathcal{E}^\dagger = \left\{ \text{SubOpt}(\text{Pess}(\mathcal{D}); x) \leq 2\beta \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x \right] \text{ for all } x \in \mathcal{S} \right\}. \quad (\text{B.27})$$

For notational simplicity, we define

$$\Sigma_h(x) = \mathbb{E}_{\pi^*} [\phi(s_h, a_h) \phi(s_h, a_h)^\top \mid s_1 = x]$$

for all $x \in \mathcal{S}$ and all $h \in [H]$. On the event $\mathcal{E}^\dagger \cap \mathcal{E}^\ddagger$, where \mathcal{E}^\dagger and \mathcal{E}^\ddagger are defined in Equations (4.9) and (B.27), respectively, we have

$$\begin{aligned} \text{SubOpt}(\text{Pess}(\mathcal{D}); x) &\leq 2\beta \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x \right] \\ &\leq 2\beta \sum_{h=1}^H \sqrt{\text{Tr} \left(\Sigma_h(x) \cdot (I + c^\dagger \cdot K \cdot \Sigma_h(x))^{-1} \right)} \\ &= 2\beta \sum_{h=1}^H \sqrt{\sum_{j=1}^d \frac{\lambda_{h,j}(x)}{1 + c^\dagger \cdot K \cdot \lambda_{h,j}(x)}}. \end{aligned}$$

Here $\{\lambda_{h,j}(x)\}_{j=1}^d$ are the eigenvalues of $\Sigma_h(x)$ for all $x \in \mathcal{S}$ and all $h \in [H]$, the first inequality follows from the definition of \mathcal{E}^\ddagger in Equation (B.27), and the second inequality follows from Equation (B.26) and the definition of \mathcal{E}^\dagger in Equation (4.9). Meanwhile, by Definition 4.3, we have $\|\phi(s, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$. By Jensen's inequality, we have

$$\|\Sigma_h(x)\|_{\text{op}} \leq \mathbb{E}_{\pi^*} [\|\phi(s_h, a_h) \phi(s_h, a_h)^\top\|_{\text{op}} \mid s_1 = x] \leq 1$$

for all $x \in \mathcal{S}$ and all $h \in [H]$. As $\Sigma_h(x)$ is positive semidefinite, we have $\lambda_{h,j}(x) \in [0, 1]$ for all $x \in \mathcal{S}$, all $h \in [H]$, and all $j \in [d]$. Hence, on $\mathcal{E}^\dagger \cap \mathcal{E}^\ddagger$, we have

$$\begin{aligned} \text{SubOpt}(\text{Pess}(\mathcal{D}); x) &\leq 2\beta \sum_{h=1}^H \sqrt{\sum_{j=1}^d \frac{\lambda_{h,j}(x)}{1 + c^\dagger \cdot K \cdot \lambda_{h,j}(x)}} \\ &\leq 2\beta \sum_{h=1}^H \sqrt{\sum_{j=1}^d \frac{1}{1 + c^\dagger \cdot K}} \leq c' \cdot d^{3/2} H^2 K^{-1/2} \sqrt{\zeta} \end{aligned}$$

for all $x \in \mathcal{S}$, where the second inequality follows from the fact that $\lambda_{h,j}(x) \in [0, 1]$ for all $x \in \mathcal{S}$, all $h \in [H]$, and all $j \in [d]$, while the third inequality follows from the choice of the scaling parameter $\beta > 0$ in Corollary 4.5. Here we define the absolute constant $c' = 2c/\sqrt{c^\dagger} > 0$, where $c^\dagger > 0$ is the absolute constant used in Equation (4.9) and $c > 0$ is the absolute constant used in Theorem 4.4. By the condition in Corollary 4.5, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^\dagger) \geq 1 - \xi/2$. Also, by Theorem 4.4, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^\ddagger) \geq 1 - \xi/2$. Hence, by the union bound, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^\dagger \cap \mathcal{E}^\ddagger) \geq 1 - \xi$, which yields Equation (4.10).

In particular, if $\text{rank}(\Sigma_h(x)) \leq r$ for all $x \in \mathcal{S}$ and all $h \in [H]$, on $\mathcal{E}^\dagger \cap \mathcal{E}^\ddagger$, which satisfies $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^\dagger \cap \mathcal{E}^\ddagger) \geq 1 - \xi$, we have

$$\begin{aligned} \text{SubOpt}(\text{Pess}(\mathcal{D}); x) &\leq 2\beta \sum_{h=1}^H \sqrt{\sum_{j=1}^d \frac{\lambda_{h,j}(x)}{1 + c^\dagger \cdot K \cdot \lambda_{h,j}(x)}} \\ &\leq 2\beta \sum_{h=1}^H \sqrt{\sum_{j=1}^r \frac{1}{1 + c^\dagger \cdot K}} \leq c'' \cdot d H^2 K^{-1/2} \sqrt{\zeta}, \end{aligned}$$

where $c'' = 2c\sqrt{r/c^\dagger} > 0$ is an absolute constant. Here the second inequality follows from the fact that $\lambda_{h,j}(x) \in [0, 1]$ and $\text{rank}(\Sigma_h(x)) \leq r$ for all $x \in \mathcal{S}$, all $h \in [H]$, and all $j \in [d]$, while the third inequality follows from the choice of β in Corollary 4.5. Hence, we obtain Equation (4.11). Therefore, we conclude the proof of Corollary 4.5. \square

B.4 Proof of Corollary 4.6

Proof of Corollary 4.6. For all $h \in [H]$ and all $\tau \in [K]$, we define the random matrices

$$Z_h = \sum_{\tau=1}^K A_h^\tau, \quad A_h^\tau = \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top - \Sigma_h, \\ \text{where } \Sigma_h = \mathbb{E}_{\bar{\pi}}[\phi(s_h, a_h) \phi(s_h, a_h)^\top]. \quad (\text{B.28})$$

For all $h \in [H]$ and all $\tau \in [K]$, Equation (B.28) implies $\mathbb{E}_{\bar{\pi}}[A_h^\tau] = 0$. Here $\mathbb{E}_{\bar{\pi}}$ is taken with respect to the trajectory induced by the fixed behavior policy $\bar{\pi}$ in the underlying MDP. As the K trajectories in the dataset \mathcal{D} are i.i.d., for all $h \in [H]$, $\{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau=1}^K$ are also i.i.d.. Hence, for all $h \in [H]$, $\{A_h^\tau\}_{\tau=1}^K$ are i.i.d. and centered.

By Definition 4.3, we have $\|\phi(x, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$. By Jensen's inequality, we have

$$\|\Sigma_h\|_{\text{op}} \leq \mathbb{E}_{\bar{\pi}}[\|\phi(s_h, a_h) \phi(s_h, a_h)^\top\|_{\text{op}}] \leq 1.$$

For any vector $v \in \mathbb{R}^d$ with $\|v\| = 1$, the triangle inequality implies

$$\|A_h^\tau v\| \leq \|\phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top v\| + \|\Sigma_h v\| \leq \|v\| + \|\Sigma_h\|_{\text{op}} \cdot \|v\| \leq 2.$$

Hence, for all $h \in [H]$ and all $\tau \in [K]$, we have

$$\|A_h^\tau\|_{\text{op}} \leq 2, \quad \|A_h^\tau (A_h^\tau)^\top\|_{\text{op}} \leq \|A_h^\tau\|_{\text{op}} \cdot \|(A_h^\tau)^\top\|_{\text{op}} \leq 4.$$

As $\{A_h^\tau\}_{\tau=1}^K$ are i.i.d. and centered, for all $h \in [H]$, we have

$$\begin{aligned} \|\mathbb{E}_{\bar{\pi}}[Z_h Z_h^\top]\|_{\text{op}} &= \left\| \sum_{\tau=1}^K \mathbb{E}_{\bar{\pi}}[A_h^\tau (A_h^\tau)^\top] \right\|_{\text{op}} \\ &= K \cdot \|\mathbb{E}_{\bar{\pi}}[A_h^1 (A_h^1)^\top]\|_{\text{op}} \leq K \cdot \mathbb{E}_{\bar{\pi}}[\|A_h^1 (A_h^1)^\top\|_{\text{op}}] \leq 4K, \end{aligned}$$

where the first inequality follows from Jensen's inequality. Similarly, for all $h \in [H]$ and all $\tau \in [K]$, as it holds that

$$\|(A_h^\tau)^\top A_h^\tau\|_{\text{op}} \leq \|(A_h^\tau)^\top\|_{\text{op}} \cdot \|A_h^\tau\|_{\text{op}} \leq 4,$$

we have

$$\|\mathbb{E}_{\bar{\pi}}[Z_h^\top Z_h]\|_{\text{op}} \leq 4K.$$

Applying Lemma D.1 to Z_h defined in Equation (B.28), for any fixed $h \in [H]$ and any $t \geq 0$, we have

$$\mathbb{P}_{\mathcal{D}}(\|Z_h\|_{\text{op}} > t) = \mathbb{P}_{\mathcal{D}}\left(\left\|\sum_{\tau=1}^K A_h^{\tau}\right\|_{\text{op}} > t\right) \leq 2d \cdot \exp\left(-\frac{t^2/2}{4K + 2t/3}\right). \quad (\text{B.29})$$

For all $\xi \in (0, 1)$, we set $t = \sqrt{10K \cdot \log(4dH/\xi)}$. By Equation (B.29), when K is sufficiently large so that $K \geq 5 \cdot \log(4dH/\xi)$, we have $2t/3 \leq K$. Hence, for the fixed $h \in [H]$, we have

$$\begin{aligned} \mathbb{P}_{\mathcal{D}}(\|Z_h\|_{\text{op}} \leq t) &\geq 1 - 2d \cdot \exp(-t^2/(8K + 4t/3)) \\ &\geq 1 - 2d \cdot \exp(-t^2/(10K)) = 1 - \xi/(2H). \end{aligned} \quad (\text{B.30})$$

By Equation (B.30) and the union bound, for all $h \in [H]$, it holds that

$$\|Z_h/K\|_{\text{op}} = \left\|\frac{1}{K} \sum_{\tau=1}^K \phi(x_h^{\tau}, a_h^{\tau}) \phi(x_h^{\tau}, a_h^{\tau})^{\top} - \Sigma_h\right\|_{\text{op}} \leq \sqrt{10/K \cdot \log(4dH/\xi)} \quad (\text{B.31})$$

with probability at least $1 - \xi/2$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$.

By the definition of Z_h in Equation (B.28), we have

$$Z_h = \sum_{\tau=1}^K \phi(x_h^{\tau}, a_h^{\tau}) \phi(x_h^{\tau}, a_h^{\tau})^{\top} - K \cdot \Sigma_h = (\Lambda_h - \lambda \cdot I) - K \cdot \Sigma_h. \quad (\text{B.32})$$

Recall that there exists an absolute constant $\underline{c} > 0$ such that $\lambda_{\min}(\Sigma_h) \geq \underline{c}$, which implies $\|\Sigma_h^{-1}\|_{\text{op}} \leq 1/\underline{c}$. By Equations (B.31) and (B.32), when K is sufficiently large so that $K \geq 40/\underline{c} \cdot \log(4dH/\xi)$, for all $h \in [H]$, it holds that

$$\begin{aligned} \lambda_{\min}(\Lambda_h/K) &= \lambda_{\min}(\Sigma_h + \lambda/K \cdot I + Z_h/K) \\ &\geq \lambda_{\min}(\Sigma_h) - \|Z_h/K\|_{\text{op}} \geq \underline{c} - \sqrt{10/K \cdot \log(4dH/\xi)} \geq \underline{c}/2. \end{aligned}$$

Hence, for all $h \in [H]$, it holds that

$$\|\Lambda_h^{-1}\|_{\text{op}} \leq (K \cdot \lambda_{\min}(\Lambda_h/K))^{-1} \leq 2/(K \cdot \underline{c})$$

with probability at least $1 - \xi/2$ with respect to $\mathbb{P}_{\mathcal{D}}$, which implies

$$\sqrt{\phi(x, a)^{\top} \Lambda_h^{-1} \phi(x, a)} \leq \|\phi(x, a)\| \cdot \|\Lambda_h^{-1}\|_{\text{op}}^{1/2} \leq c''/\sqrt{K}, \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]. \quad (\text{B.33})$$

Here we define the absolute constant $c'' = \sqrt{2/\underline{c}}$ and use the fact that $\|\phi(x, a)\| \leq 1$ for all $(x, a) \in \mathcal{S} \times \mathcal{A}$ in Definition 4.3.

We define the event

$$\mathcal{E}_1^* = \left\{ \sqrt{\phi(x, a)^{\top} \Lambda_h^{-1} \phi(x, a)} \leq c''/\sqrt{K} \text{ for all } (x, a) \in \mathcal{S} \times \mathcal{A} \text{ and all } h \in [H] \right\}.$$

By Equation (B.33), we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}_1^*) \geq 1 - \xi/2$ for $K \geq 40/\underline{c} \cdot \log(4dH/\xi)$. Also, we define the event

$$\mathcal{E}_2^* = \left\{ \text{SubOpt}(\hat{\pi}; x) \leq 2\beta \cdot \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\sqrt{\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h)} \mid s_1 = x \right] \text{ for all } x \in \mathcal{S} \right\}.$$

Here we set $\beta = c \cdot dH \sqrt{\log(4dHK/\xi)}$, where $c > 0$ is the same absolute constant as in Theorem 4.4. By Theorem 4.4, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}_2^*) \geq 1 - \xi/2$. Hence, when K is sufficiently large so that $K \geq 40/\underline{c} \cdot \log(4dH/\xi)$, on the event $\mathcal{E}^* = \mathcal{E}_1^* \cap \mathcal{E}_2^*$, we have

$$\text{SubOpt}(\hat{\pi}; x) \leq 2\beta \cdot H \cdot c'' / \sqrt{K} = c' \cdot dH^2 \sqrt{\log(4dHK/\xi)/K}, \quad \forall x \in \mathcal{S}.$$

By the union bound, we have $\mathbb{P}_{\mathcal{D}}(\mathcal{E}^*) \geq 1 - \xi$ with $c' = 2c \cdot c''$, where $c'' = \sqrt{2/\underline{c}}$ and $c > 0$ is the same absolute constant as in Theorem 4.4. Therefore, we conclude the proof of Corollary 4.6. \square

C Proofs of Minimax Optimality

C.1 Proof of Lemma 5.3

Proof of Lemma 5.3. We consider two linear MDPs $\mathcal{M}_1 = M(p^*, p, p)$ and $\mathcal{M}_2 = M(p, p^*, p)$ in the class \mathfrak{M} defined in Equation (5.6). As we have $p^* > p$, by Equations (5.7) and (5.8), the optimal policy for \mathcal{M}_1 satisfies $\pi_1^{*,1}(a_1 | x_0) = \mathbb{1}\{a_1 = b_1\}$, which always chooses the action b_1 at the first step $h = 1$, while the optimal policy for \mathcal{M}_2 satisfies $\pi_1^{*,2}(a_1 | x_0) = \mathbb{1}\{a_1 = b_2\}$, which always chooses the action b_2 at the first step $h = 1$. Given the dataset \mathcal{D} , we denote by $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$ the output of any offline RL algorithm. Recall that $\sum_{j=1}^A \pi_1(b_j | x_0) = 1$. By Equation (5.11), the suboptimality of π for \mathcal{M}_1 is

$$\begin{aligned} \text{SubOpt}(\mathcal{M}_1, \pi; x_0) &= \left(p^* - p^* \cdot \pi_1(b_1 | x_0) - \sum_{j=2}^A p \cdot \pi_1(b_j | x_0) \right) \cdot (H - 1) \\ &= (p^* - p) \cdot (1 - \pi_1(b_1 | x_0)) \cdot (H - 1). \end{aligned} \tag{C.1}$$

Similarly, the suboptimality of π for \mathcal{M}_2 is

$$\text{SubOpt}(\mathcal{M}_2, \pi; x_0) = (p^* - p) \cdot (1 - \pi_1(b_2 | x_0)) \cdot (H - 1). \tag{C.2}$$

Recall that we define $n_j = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\}$ for all $j \in [A]$. Combining Equations (C.1) and (C.2), we have

$$\begin{aligned}
& \max_{\ell \in \{1,2\}} \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] \\
& \geq \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot \left(\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} \left[\text{SubOpt}(\mathcal{M}_1, \text{Algo}(\mathcal{D}); x_0) \right] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} \left[\text{SubOpt}(\mathcal{M}_2, \text{Algo}(\mathcal{D}); x_0) \right] \right) \\
& = \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot (p^* - p) \cdot (H - 1) \cdot \left(\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [1 - \pi_1(b_2 | x_0)] \right) \\
& \geq \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot (p^* - p) \cdot (H - 1) \cdot \left(\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 | x_0)] \right),
\end{aligned}$$

where $\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell}$ is the expectation taken with respect to the randomness of \mathcal{D} , which is compliant with the underlying MDP \mathcal{M}_ℓ for all $\ell \in \{1, 2\}$. Here the first inequality follows from the fact that $\max\{x, y\} \geq a \cdot x + (1 - a) \cdot y$, for all $a \in [0, 1]$ and all $x, y \geq 0$. Therefore, we conclude the proof of Lemma 5.3. \square

C.2 Suboptimality of PEVI on \mathfrak{M}

In this section, we establish the suboptimality of PEVI for the linear MDPs in the class \mathfrak{M} . We consider any linear MDP $\mathcal{M} = M(p_1, p_2, p_3) \in \mathfrak{M}$ and the dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$ compliant with \mathcal{M} , which is constructed in Section 5.3.1. Recall that $n_j = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\}$ for all $j \in [A]$ and $j^* = \arg \max_{j \in [A]} p_j$. We define $m_j = \sum_{\tau=1}^K \mathbb{1}\{x_2^\tau = x_j\}$ for all $j \in \{1, 2\}$.

Lemma C.1 (Suboptimality of PEVI). Suppose that Assumption 2.2 holds and the underlying MDP is $\mathcal{M} \in \mathfrak{M}$. In Algorithm 2, we set $\lambda = 1$ and $\beta = c \cdot dH \sqrt{\log(4dHK/\xi)}$. Here $c > 0$ is an absolute constant and $\xi \in (0, 1)$ is the confidence parameter, which are specified in Theorem 4.4. We have

$$\begin{aligned}
& \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right] \\
& = \frac{1}{\sqrt{1 + n_{j^*}}} + (H - 1) \cdot \left(\frac{p_{j^*}}{\sqrt{1 + m_1}} + \frac{1 - p_{j^*}}{\sqrt{1 + m_2}} \right),
\end{aligned} \tag{C.3}$$

where \mathbb{E}_{π^*} is taken with respect to the trajectory induced by π^* in \mathcal{M} . When K is sufficiently large so that $K \geq 32 \cdot \log(8/\xi)$, $\text{Pess}(\mathcal{D})$ in Algorithm 2 satisfies

$$\text{SubOpt}(\mathcal{M}, \text{Pess}(\mathcal{D}); x_0) \leq 9\beta H / \sqrt{n_{j^*}} \tag{C.4}$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$.

Proof of Lemma C.1. Recall that $x_1^\tau = x_0$ for all $\tau \in [K]$. By the definition of Λ_h in Equation (4.6), we have

$$\Lambda_1 = \lambda \cdot I + \sum_{\tau=1}^K \phi(x_0, a_1^\tau) \phi(x_0, a_1^\tau)^\top = \text{diag}(\lambda + n_1, \dots, \lambda + n_A, \lambda, \lambda) \in \mathbb{R}^{(A+2) \times (A+2)}, \quad (\text{C.5})$$

where the second equality follows from the definition of ϕ in Equation (5.9). Since $x_1, x_2 \in \mathcal{S}$ are the absorbing states, for all $h \in \{2, \dots, H\}$, we have

$$\Lambda_h = \lambda \cdot I + \sum_{\tau=1}^K \phi(x_h^\tau, a_h^\tau) \phi(x_h^\tau, a_h^\tau)^\top = \text{diag}(\lambda, \dots, \lambda, \lambda + m_1, \lambda + m_2) \in \mathbb{R}^{(A+2) \times (A+2)}, \quad (\text{C.6})$$

where the second equality follows from the definition of ϕ in Equation (5.9). Also, we have

$$\mathbb{P}_{\pi^*}(s_2 = x_1) = p_{j^*}, \quad \mathbb{P}_{\pi^*}(s_2 = x_2) = 1 - p_{j^*},$$

where \mathbb{P}_{π^*} is taken with respect to the trajectory induced by π^* in \mathcal{M} . Combining Equations (C.5) and (C.6), we have

$$\begin{aligned} & \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right] \\ &= \begin{cases} (1 + n_{j^*})^{-1/2}, & h = 1, \\ p_{j^*} \cdot (1 + m_1)^{-1/2} + (1 - p_{j^*}) \cdot (1 + m_2)^{-1/2}, & h \in \{2, \dots, H\}, \end{cases} \end{aligned} \quad (\text{C.7})$$

which yields Equation (C.3). Here we use the definition of ϕ in Equation (5.9) and the regularization parameter $\lambda = 1$ in Algorithm 2.

In the sequel, we lower bound m_1 and m_2 via concentration inequalities. By the construction of \mathcal{D} in Section 5.3.1, for all $\tau \in [K]$ and all $j \in [A]$, given the action $a_1^\tau = b_j$, $\mathbb{1}\{x_2^\tau = x_1\}$ is a Bernoulli random variable with the success probability p_j . As $p_1, p_2, p_3 \in [1/4, 3/4]$, we have

$$\mathbb{E}_{\mathcal{D}}[m_1] = \sum_{\tau=1}^K \mathbb{E}_{\mathcal{D}}[\mathbb{1}\{x_2^\tau = x_1\}] = \sum_{j=1}^A p_j \cdot n_j \geq 1/4 \cdot \sum_{j=1}^A n_j = K/4. \quad (\text{C.8})$$

Given the actions $\{a_1^\tau\}_{\tau=1}^K$, m_1 is a sum of K independent Bernoulli random variables. By Hoeffding's inequality, for all $\xi > 0$, it holds that

$$|m_1 - \mathbb{E}_{\mathcal{D}}[m_1]| \leq \sqrt{K/2 \cdot \log(8/\xi)} \quad (\text{C.9})$$

with probability at least $1 - \xi/4$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. By Equations (C.8) and (C.9), it holds that

$$m_1 \geq K/4 - \sqrt{K/2 \cdot \log(8/\xi)} \quad (\text{C.10})$$

with probability at least $1 - \xi/4$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Similarly, we have

$$\mathbb{E}_{\mathcal{D}}[m_2] = \sum_{\tau=1}^K \mathbb{E}_{\mathcal{D}}[\mathbb{1}\{x_2^\tau = x_2\}] = \sum_{j=1}^A (1 - p_j) \cdot n_j \geq 1/4 \cdot \sum_{j=1}^A n_j \geq K/4.$$

By Hoeffding's inequality, it holds that

$$m_2 \geq K/4 - \sqrt{K/2 \cdot \log(8/\xi)} \quad (\text{C.11})$$

with probability at least $1 - \xi/4$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. We define the event

$$\bar{\mathcal{E}} = \{m_1 \geq K/8, m_2 \geq K/8\}. \quad (\text{C.12})$$

Combining Equations (C.10) and (C.11), by the union bound, when K is sufficiently large so that $K \geq 32 \cdot \log(8/\xi)$, we have $\mathbb{P}_{\mathcal{D}}(\bar{\mathcal{E}}) \geq 1 - \xi/2$.

Meanwhile, by Theorem 4.4 with the regularization parameter $\lambda = 1$ and the confidence parameter $\xi/2$, it holds that

$$\text{SubOpt}(\mathcal{M}, \text{Pess}(\mathcal{D}); x_0) \leq \frac{2\beta}{\sqrt{1 + n_{j^*}}} + 2\beta(H - 1) \cdot \left(\frac{p_{j^*}}{\sqrt{1 + m_1}} + \frac{1 - p_{j^*}}{\sqrt{1 + m_2}} \right) \quad (\text{C.13})$$

with probability at least $1 - \xi/2$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. By the union bound, on the two events defined in Equations (C.12) and (C.13), respectively, it holds that

$$\begin{aligned} \text{SubOpt}(\mathcal{M}, \text{Pess}(\mathcal{D}); x_0) &\leq \frac{2\beta}{\sqrt{n_{j^*}}} + 2\beta(H - 1) \cdot \left(\frac{3/4}{\sqrt{m_1}} + \frac{3/4}{\sqrt{m_2}} \right) \\ &\leq 2\beta/\sqrt{n_{j^*}} + 9\beta(H - 1)/\sqrt{K} \leq 9\beta H/\sqrt{n_{j^*}} \end{aligned}$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Here the first inequality follows from the fact that $p_{j^*} \in [1/4, 3/4]$, the second inequality follows from the fact that $m_1, m_2 \geq K/8$ on $\bar{\mathcal{E}}$ defined in Equation (C.12), and the last inequality follows from the fact that $n_{j^*} \leq K$. Therefore, we conclude the proof of Lemma C.1. \square

C.3 Proof of Theorem 4.7

Proof of Theorem 4.7. We consider two linear MDPs $\mathcal{M}_1 = M(p^*, p, p)$ and $\mathcal{M}_2 = M(p, p^*, p)$ in the class \mathfrak{M} and the dataset \mathcal{D} compliant with \mathcal{M}_1 or \mathcal{M}_2 , which is constructed in Section 5.3.1. We additionally assume that $n_1, n_2 \geq 4$ and $1/\bar{c} \leq n_1/n_2 \leq \bar{c}$ for an absolute constant $\bar{c} > 0$. For the policy $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$ constructed by any offline RL algorithm, recall the test function $\psi_{\text{Algo}}(\mathcal{D})$ defined in Equation (5.17), which is constructed for the hypothesis testing problem defined in Equation (5.16). By Equation (5.18), we have

$$\begin{aligned} &\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 | x_0)] \\ &= \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [\mathbb{1}\{\psi_{\text{Algo}}(\mathcal{D}) = 1\}] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\mathbb{1}\{\psi_{\text{Algo}}(\mathcal{D}) = 0\}] \\ &\geq 1 - \text{TV}(\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1}, \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2}) \geq 1 - \sqrt{\text{KL}(\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1} \parallel \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2})/2}, \end{aligned} \quad (\text{C.14})$$

where the first inequality follows from the definition of the total variation distance, while the second inequality follows from Pinsker's inequality. Here for each $\ell \in \{1, 2\}$, $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}$ is taken with respect to the randomness of \mathcal{D} when it is compliant with \mathcal{M}_ℓ . Also, we use TV and KL to denote the total variation distance and the Kullback-Leibler (KL-)divergence, respectively.

Recall the mapping from the rewards $\{r_2^\tau\}_{\tau=1}^K$ to the relabeled rewards $\{\kappa_j^i\}_{i,j=1}^{n_j, A}$ defined in Equation (5.12). Also, recall that the actions $\{a_h^\tau\}_{\tau \in [K], h \geq 2}$ are chosen arbitrarily but fixed in the dataset \mathcal{D} . Since $x_1, x_2 \in \mathcal{S}$ are the absorbing states, we have $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}(\mathcal{D}) = \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}(\mathcal{D}_1)$ for all $\ell \in \{1, 2\}$, where $\mathcal{D}_1 = \{(x_1^\tau, a_1^\tau, x_2^\tau, r_2^\tau)\}_{\tau=1}^K$ is the reduced dataset. By Equation (5.14), the probabilities of observing \mathcal{D}_1 in \mathcal{M}_1 and \mathcal{M}_2 take the form

$$\begin{aligned}\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1}(\mathcal{D}_1) &= (p^*)^{\sum_{i=1}^{n_1} \kappa_1^i} \cdot (1 - p^*)^{n_1 - \sum_{i=1}^{n_1} \kappa_1^i} \cdot \prod_{\substack{j \in [A] \\ j \neq 1}} \left(p^{\sum_{i=1}^{n_j} \kappa_j^i} \cdot (1 - p)^{n_j - \sum_{i=1}^{n_j} \kappa_j^i} \right), \\ \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2}(\mathcal{D}_1) &= (p^*)^{\sum_{i=1}^{n_2} \kappa_2^i} \cdot (1 - p^*)^{n_2 - \sum_{i=1}^{n_2} \kappa_2^i} \cdot \prod_{\substack{j \in [A] \\ j \neq 2}} \left(p^{\sum_{i=1}^{n_j} \kappa_j^i} \cdot (1 - p)^{n_j - \sum_{i=1}^{n_j} \kappa_j^i} \right),\end{aligned}\quad (\text{C.15})$$

respectively. Here we use the fact that $p_1 = p^*$ and $p_2 = p$ in $\mathcal{M}_1 = M(p^*, p, p)$, while $p_1 = p$ and $p_2 = p^*$ in $\mathcal{M}_2 = M(p, p^*, p)$, where $p^* > p$. By Equation (C.15), we have

$$\begin{aligned}\text{KL}(\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1} \parallel \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2}) &= \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} \left[\left(\sum_{i=1}^{n_1} \kappa_1^i - \sum_{i=1}^{n_2} \kappa_2^i \right) \cdot \log \frac{p^* \cdot (1 - p)}{p \cdot (1 - p^*)} + (n_1 - n_2) \cdot \log \frac{1 - p^*}{1 - p} \right] \\ &= (n_1 p^* - n_2 p) \cdot \log \frac{p^* \cdot (1 - p)}{p \cdot (1 - p^*)} + (n_1 - n_2) \cdot \log \frac{1 - p^*}{1 - p} \\ &= n_1 \cdot \left(p^* \cdot \log \frac{p^*}{p} + (1 - p^*) \cdot \log \frac{1 - p^*}{1 - p} \right) + n_2 \cdot \left(p \cdot \log \frac{p}{p^*} + (1 - p) \cdot \log \frac{1 - p}{1 - p^*} \right),\end{aligned}$$

where the second equality follows from Equation (5.13). Note that for all $x \in (-1, 1)$, it holds that $\log(1 + x) \leq x$. Hence, when $p^* - p < \min\{p, 1 - p\}$, we have

$$\begin{aligned}p^* \cdot \log \frac{p^*}{p} + (1 - p^*) \cdot \log \frac{1 - p^*}{1 - p} &= p^* \cdot \log \left(1 + \frac{p^* - p}{p} \right) + (1 - p^*) \cdot \log \left(1 + \frac{p - p^*}{1 - p} \right) \\ &\leq p^* \cdot \frac{p^* - p}{p} + (1 - p^*) \cdot \frac{p - p^*}{1 - p} = \frac{(p^* - p)^2}{p \cdot (1 - p)}.\end{aligned}$$

Similarly, when $p^* - p < \min\{p^*, 1 - p^*\}$, we have

$$p \cdot \log \frac{p}{p^*} + (1 - p) \cdot \log \frac{1 - p}{1 - p^*} \leq \frac{(p^* - p)^2}{p^* \cdot (1 - p^*)}.$$

Recall that $n_1, n_2 \geq 4$ and $1/\bar{c} \leq n_1/n_2 \leq \bar{c}$ for an absolute constant $\bar{c} > 0$. We set

$$p^* = \frac{1}{2} + \frac{1}{8} \cdot \sqrt{\frac{3}{2 \cdot (n_1 + n_2)}}, \quad p = \frac{1}{2} - \frac{1}{8} \cdot \sqrt{\frac{3}{2 \cdot (n_1 + n_2)}} \quad (\text{C.16})$$

such that $p^*, p \in [1/4, 3/4]$, $0 \leq p^* - p \leq 1/4$, and $p^* - p < \min\{p, 1 - p, p^*, 1 - p^*\}$. Hence, the KL-divergence is upper bounded as

$$\begin{aligned} \text{KL}(\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1} \parallel \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2}) &\leq \frac{n_1 \cdot (p^* - p)^2}{p \cdot (1 - p)} + \frac{n_2 \cdot (p^* - p)^2}{p^* \cdot (1 - p^*)} \\ &\leq 16/3 \cdot (n_1 + n_2) \cdot (p^* - p)^2 \leq 1/2, \end{aligned} \quad (\text{C.17})$$

where the second inequality follows from the fact that $p, p^* \in [1/4, 3/4]$ and the last inequality follows from Equation (C.16). By Equations (C.14) and (C.17), we have

$$\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 | x_0)] \geq 1 - \sqrt{\text{KL}(\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_1} \parallel \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_2})/2} \geq 1/2. \quad (\text{C.18})$$

Combining Equations (C.16) and (C.18), for the output $\pi = \{\pi_h\}_{h=1}^H = \text{Algo}(\mathcal{D})$ of any offline RL algorithm, we have

$$\begin{aligned} &\max_{\ell \in \{1, 2\}} \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} [\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0)] \\ &\geq \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot (p^* - p) \cdot (H - 1) \cdot \left(\mathbb{E}_{\mathcal{D} \sim \mathcal{M}_1} [1 - \pi_1(b_1 | x_0)] + \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_2} [\pi_1(b_1 | x_0)] \right) \\ &\geq \frac{\sqrt{n_1 n_2}}{\sqrt{n_1} + \sqrt{n_2}} \cdot \frac{1}{4} \cdot \sqrt{\frac{3}{2 \cdot (n_1 + n_2)}} \cdot \frac{H - 1}{2} \\ &= \frac{\sqrt{n_1/n_2}}{(\sqrt{n_1/n_2} + 1) \cdot \sqrt{1 + n_1/n_2}} \cdot \frac{\sqrt{3}}{8\sqrt{2}} \cdot (H - 1) \\ &\geq C' \cdot (H - 1) \end{aligned} \quad (\text{C.19})$$

for an absolute constant

$$C' = \frac{\sqrt{3}}{8\sqrt{2}} \cdot \frac{1}{(\sqrt{\bar{c}} + 1) \cdot \sqrt{\bar{c} \cdot (\bar{c} + 1)}} > 0. \quad (\text{C.20})$$

Here the first inequality follows from Lemma 5.3 and the last inequality follows from the fact that $1/\bar{c} \leq n_1/n_2 \leq \bar{c}$ for an absolute constant $\bar{c} > 0$.

By the definition of \mathcal{M}_1 and \mathcal{M}_2 in Equation (5.15), at the first step $h = 1$, the optimal policy $\pi^{*,1}$ for \mathcal{M}_1 always chooses the action b_1 , while the optimal policy $\pi^{*,2}$ for \mathcal{M}_2 always chooses the action b_2 . Recall that $n_j = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\}$ for all $j \in [A]$ and $m_j = \sum_{\tau=1}^K \mathbb{1}\{x_2^\tau = x_j\}$ for all $j \in \{1, 2\}$. Also, recall that $j^* = \arg \max_{j \in [A]} p_j = 1$ for \mathcal{M}_1 , while $j^* = \arg \max_{j \in [A]} p_j = 2$ for \mathcal{M}_2 . Hence, we have $n_{j^*} = n_\ell$ in \mathcal{M}_ℓ for all $\ell \in \{1, 2\}$. By Lemma C.1, for all $\ell \in \{1, 2\}$, we have

$$\sum_{h=1}^H \mathbb{E}_{\pi^{*,\ell}, \mathcal{M}_\ell} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right] = \frac{1}{\sqrt{1 + n_\ell}} + (H - 1) \cdot \left(\frac{p^*}{\sqrt{1 + m_1}} + \frac{1 - p^*}{\sqrt{1 + m_2}} \right),$$

where $\mathbb{E}_{\pi^{*,\ell}, \mathcal{M}_\ell}$ is taken with respect to the trajectory induced by $\pi^{*,\ell}$ in \mathcal{M}_ℓ for all $\ell \in \{1, 2\}$. Given the actions $\{a_1^\tau\}_{\tau=1}^K$, m_1 and m_2 are two sums of K independent Bernoulli random variables.

We define the event

$$\bar{\mathcal{E}} = \{m_1 \geq K/8, m_2 \geq K/8\}. \quad (\text{C.21})$$

On $\bar{\mathcal{E}}$, we have

$$\begin{aligned} & \sum_{h=1}^H \mathbb{E}_{\pi^*, \ell, \mathcal{M}_\ell} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right] \\ & \leq \frac{1}{\sqrt{n_\ell}} + (H-1) \cdot \left(\frac{3/4}{\sqrt{m_1}} + \frac{3/4}{\sqrt{m_2}} \right) \leq 6(H-1)/\sqrt{n_\ell}. \end{aligned} \quad (\text{C.22})$$

Hence, we have

$$\begin{aligned} & \max_{\ell \in \{1,2\}} \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\frac{\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0)}{\sum_{h=1}^H \mathbb{E}_{\pi^*, \ell, \mathcal{M}_\ell} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right]} \right] \\ & \geq \max_{\ell \in \{1,2\}} \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\frac{\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0)}{\sum_{h=1}^H \mathbb{E}_{\pi^*, \ell, \mathcal{M}_\ell} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right]} \cdot \mathbf{1}_{\bar{\mathcal{E}}} \right] \\ & \geq \max_{\ell \in \{1,2\}} \left\{ \frac{\sqrt{n_\ell}}{6(H-1)} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \cdot \mathbf{1}_{\bar{\mathcal{E}}} \right] \right\}, \end{aligned} \quad (\text{C.23})$$

where the last inequality follows from Equation (C.22) and the definition of $\bar{\mathcal{E}}$ in Equation (C.21). We use $\bar{\mathcal{E}}^c$ to denote the complement of $\bar{\mathcal{E}}$. By Equation (5.8), we have $r_h \in [0, 1]$ for all $h \in [H]$ and $r_1(x_0, a) = 0$ for all $a \in \mathcal{A}$. Hence, the suboptimality of any policy is upper bounded by $H-1$. For all $\ell \in \{1, 2\}$, we have

$$\begin{aligned} & \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \cdot \mathbf{1}_{\bar{\mathcal{E}}} \right] \\ & = \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] - \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \cdot \mathbf{1}_{\bar{\mathcal{E}}^c} \right] \\ & \geq \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] - (H-1) \cdot \sqrt{n_\ell} \cdot \mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}(\bar{\mathcal{E}}^c). \end{aligned} \quad (\text{C.24})$$

We invoke the same argument as in Equations (C.10) and (C.11). For all $\delta > 0$ and all $\ell \in \{1, 2\}$, as it holds that $p, p^* \geq 1/4$, when K is sufficiently large so that $K \geq 32 \cdot \log(4/\delta)$, we have $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}(\bar{\mathcal{E}}) \geq 1 - \delta$. Hence, setting $\delta = 1/K^2$, when K is sufficiently large so that $K \geq 32 \cdot \log(4K^2) = 64 \cdot \log(2K)$, we have $\mathbb{P}_{\mathcal{D} \sim \mathcal{M}_\ell}(\bar{\mathcal{E}}) \geq 1 - 1/K^2$ for all $\ell \in \{1, 2\}$. By Equation (C.24), for all $\ell \in \{1, 2\}$, we have

$$\begin{aligned} & \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \cdot \mathbf{1}_{\bar{\mathcal{E}}} \right] \\ & \geq \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] - (H-1) \cdot \sqrt{n_\ell}/K^2. \end{aligned} \quad (\text{C.25})$$

By Equations (C.19), (C.23), and (C.25), when K is sufficiently large so that $K \geq 64 \cdot \log(2K)$

and $K \geq 2/C'$, we have

$$\begin{aligned}
& \max_{\ell \in \{1,2\}} \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\frac{\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0)}{\sum_{h=1}^H \mathbb{E}_{\pi^*, \ell, \mathcal{M}_\ell} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x_0 \right]} \right] \\
& \geq \max_{\ell \in \{1,2\}} \left\{ \frac{\sqrt{n_\ell}}{6(H-1)} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \cdot \mathbb{1}_{\bar{\mathcal{E}}} \right] \right\} \\
& \geq \max_{\ell \in \{1,2\}} \left\{ \frac{\sqrt{n_\ell}}{6(H-1)} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] - \frac{n_\ell}{6K^2} \right\} \\
& \geq \frac{1}{6(H-1)} \cdot \max_{\ell \in \{1,2\}} \sqrt{n_\ell} \cdot \mathbb{E}_{\mathcal{D} \sim \mathcal{M}_\ell} \left[\text{SubOpt}(\mathcal{M}_\ell, \text{Algo}(\mathcal{D}); x_0) \right] - \frac{1}{6K} \\
& \geq C'/6 - 1/(6K) \\
& \geq C'/12.
\end{aligned} \tag{C.26}$$

Here $C' > 0$ is the absolute constant defined in Equation (C.20), the first inequality follows from Equation (C.23), the second inequality follows from Equation (C.25), the third inequality follows from the fact that $n_\ell \leq K$ for all $\ell \in \{1, 2\}$, and the fourth inequality follows from Equation (C.19). As \mathfrak{M} defined in Equation (5.6) is a subclass of linear MDPs, Equation (C.26) implies the lower bound given in Equation (4.14) with $c = C'/12$ for K sufficiently large so that $K \geq 64 \cdot \log(2K)$ and $K \geq 2/C'$. Therefore, we conclude the proof of Theorem 4.7. \square

C.4 Locally Refined Upper Bounds

Since \mathfrak{M} is a class of linear MDPs, Theorem 4.4 yields an upper bound on the suboptimality of $\text{Pess}(\mathcal{D})$ constructed by Algorithm 2, which is minimax optimal up to β and absolute constant. Focusing on \mathfrak{M} , with a different choice of the ξ -uncertainty quantifier tailored for \mathcal{M} , PEVI achieves a more refined local minimax optimality.

Specifically, for any $\mathcal{M} = M(p_1, p_2, p_3) \in \mathfrak{M}$, recall that $x_1, x_2 \in \mathcal{S}$ are the absorbing states. By the construction of the reward function in Equation (5.8), for any function V and any $h \geq 2$, the Bellman operator \mathbb{B}_h defined in Equation (2.4) takes the form

$$(\mathbb{B}_h V)(x_1, a) = r_h(x_1, a) + V(x_1) = V(x_1) + 1, \quad (\mathbb{B}_h V)(x_2, a) = r_h(x_2, a) + V(x_2) = V(x_2),$$

for all $a \in \mathcal{A}$. Recall that the initial state is fixed to x_0 . For any $j \in [A]$, we have

$$(\mathbb{B}_1 V)(x_0, b_j) = p_j \cdot V(x_1) + (1 - p_j) \cdot V(x_2). \tag{C.27}$$

Based on the dataset $\mathcal{D} = \{(x_h^\tau, a_h^\tau, r_h^\tau)\}_{\tau, h=1}^{K, H}$ that is compliant with \mathcal{M} , we construct the estimated Bellman operator \hat{B}_h and value function \hat{V}_h for all $h \in [H]$ as follows. To begin with, we define \hat{V}_{H+1} as a zero function. For all $h \geq 2$, we define

$$\hat{V}_h(x_1) = H - h + 1, \quad \hat{V}_h(x_2) = 0. \tag{C.28}$$

For all $h \geq 2$ and all $a \in \mathcal{A}$, we define the estimated Bellman update $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ as

$$\begin{aligned} (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x_1, a) &= (\mathbb{B}_h \widehat{V}_{h+1})(x_1, a) = \widehat{V}_{h+1}(x_1) + 1 = H - h + 1, \\ (\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x_2, a) &= (\mathbb{B}_h \widehat{V}_{h+1})(x_2, a) = \widehat{V}_{h+1}(x_2) = 0. \end{aligned} \quad (\text{C.29})$$

For $h = 1$ and all $j \in [A]$ with $n_j > 0$, we define

$$\begin{aligned} (\widehat{\mathbb{B}}_1 \widehat{V}_2)(x_0, b_j) &= \frac{1}{n_j} \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\} \cdot \widehat{V}_2(x_2^\tau) \\ &= \frac{H-1}{n_j} \sum_{\tau=1}^K \mathbb{1}\{(a_1^\tau, x_2^\tau) = (b_j, x_1)\} = \frac{H-1}{n_j} \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\} \cdot r_2^\tau. \end{aligned} \quad (\text{C.30})$$

For all $j \in [A]$ with $n_j = 0$, we simply set $(\widehat{\mathbb{B}}_1 \widehat{V}_2)(x_0, b_j) = 0$. Furthermore, for any $\xi > 0$, we define

$$\Gamma_1^\xi(x_0, b_j) = (H-1) \cdot \sqrt{\log(2A/\xi)/(1+n_j)}, \quad \forall j \in [A], \quad \Gamma_h^\xi(\cdot, \cdot) \equiv 0, \quad \forall h \geq 2. \quad (\text{C.31})$$

Thus, employing the empirical Bellman update $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ given in Equations (C.29) and (C.30), and function Γ_h^ξ defined in Equation (C.31) for all $h \in [H]$, we obtain an instantiation of PEVI specified in Algorithm 1. We use $\text{Pess}^*(\mathcal{D})$ to denote the output policy, whose suboptimality is established in the following proposition.

Proposition C.2 (Local Optimality of PEVI). For any $\mathcal{M} \in \mathfrak{M}$ and any dataset \mathcal{D} that is compliant with \mathcal{M} , we assume that $n_{j^*} = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_{j^*}^*\} \geq 1$ for the optimal action $b_{j^*}^*$, where $j^* = \arg \max_{j \in \{1,2\}} \{p_j\}$. Then the following statements hold: (i) $\{\Gamma_h^\xi\}_{h=1}^H$ defined in Equation (C.31) are ξ -uncertainty quantifiers satisfying Equation (4.1); (ii) we have

$$\text{SubOpt}(\text{Pess}^*(\mathcal{D}); x_0) \leq c \cdot H \sqrt{\log(A/\xi)} \cdot \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \middle| s_1 = x_0 \right]$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Here $c > 0$ is an absolute constant and Λ_h is defined in Equation (4.6) with $\lambda = 1$. \mathbb{E}_{π^*} is taken with respect to the trajectory induced by the optimal policy π^* in the underlying MDP \mathcal{M} .

We remark that based on the ξ -uncertainty quantifiers tailored for linear MDPs in \mathfrak{M} , Proposition C.2 establishes a tighter upper bound than that in Theorem 4.4. Specifically, Equation (C.4) shows that directly applying Theorem 4.4 yields an $\widetilde{\mathcal{O}}(H^2 A / \sqrt{n_{j^*}})$ suboptimality upper bound, where $\widetilde{\mathcal{O}}(\cdot)$ omits logarithmic terms and absolute constants. In contrast, as shown in Equation (C.35), $\text{Pess}^*(\mathcal{D})$ achieves an improved $\widetilde{\mathcal{O}}(H / \sqrt{n_{j^*}})$ suboptimality upper bound. Thus, neglecting logarithmic terms and absolute constants, although both being minimax optimal algorithms, $\text{Pess}^*(\mathcal{D})$ is superior over $\text{Pess}(\mathcal{D})$ given in Algorithm 2 by a factor of HA , and $\text{Pess}^*(\mathcal{D})$ is minimax optimal up to a factor of H .

Proof of Proposition C.2. The proof consists of two steps. In the first step, we prove that $\{\Gamma_h^\xi\}_{h=1}^H$ given in Equation (C.31) are ξ -uncertainty quantifiers. In the second step, we apply Theorem 4.2 and establish the upper bound.

Step (i). In the sequel, we show that $\{\Gamma_h^\xi\}_{h=1}^H$ are ξ -uncertainty quantifiers. For all $h \geq 2$, by the definition of estimated Bellman updates $\widehat{\mathbb{B}}_h \widehat{V}_{h+1}$ in Equation (C.29) and the definition of Γ_h in Equation (C.31), we have

$$|(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a)| = 0 = \Gamma_h^\xi(x, a) \quad (\text{C.32})$$

for all $(x, a) \in \mathcal{S} \times \mathcal{A}$.

Now we fix $h = 1$. Recall that we define $n_j = \sum_{\tau=1}^K \mathbb{1}\{a_1^\tau = b_j\}$ for all $j \in [A]$. For any $j \in [A]$ such that $n_j = 0$, recall the definition that $(\widehat{\mathbb{B}}_1 \widehat{V}_2)(x_0, b_j) = 0$. By Equation (C.27), we have $(\mathbb{B}_1 \widehat{V}_2)(x_0, b_j) = p_j \cdot (H - 1)$. By the definition of Γ_1^ξ in Equation (C.31), we have

$$\Gamma_1^\xi(x_0, b_j) = (H - 1) \cdot \sqrt{2 \log(2A/\xi)} \geq H - 1 \geq (\mathbb{B}_1 \widehat{V}_2)(x_0, b_j)$$

for all $j \in [A]$. Thus, we have

$$|(\widehat{\mathbb{B}}_1 \widehat{V}_2)(x_0, b_j) - (\mathbb{B}_1 \widehat{V}_2)(x_0, b_j)| \leq \Gamma_1^\xi(x_0, b_j)$$

for all $j \in [A]$. Recall the mapping from the rewards $\{r_2^\tau\}_{\tau=1}^K$ to the relabeled rewards $\{\kappa_j^i\}_{i,j=1}^{n_j, A}$ defined in Equation (5.12). For any $j \in [A]$ such that $n_j \geq 1$, we consider the σ -algebras

$$\mathcal{F}_\tau^j = \sigma(\{\kappa_j^i\}_{i=1}^\tau), \quad \tau \in [n_j].$$

Since \mathcal{D} is compliant with \mathcal{M} , by Equation (5.13), $\{\kappa_j^i - p_j\}_{i=1}^{n_j}$ is a martingale difference sequence adapted to filtration $\{\mathcal{F}_i^j\}_{i=1}^{n_j}$. Applying Azuma-Hoeffding's inequality, we have

$$\begin{aligned} \mathbb{P}_{\mathcal{D}} \left(\left| \frac{1}{n_j} \sum_{i=1}^{n_j} (\kappa_j^i - p_j) \right| \geq \sqrt{\log(2A/\xi)/(1+n_j)} \right) \\ \leq 2 \exp(-2n_j/(1+n_j) \cdot \log(2A/\xi)) \leq 2 \cdot (2A/\xi)^{-2n_j/(1+n_j)} \leq \xi/A, \end{aligned} \quad (\text{C.33})$$

where the last inequality follows from the fact that $n_j \geq 1$. By Equation (C.27), we have

$$(\mathbb{B}_1 \widehat{V}_2)(x_0, b_j) = p_j \cdot \widehat{V}_2(x_1) + (1 - p_j) \cdot \widehat{V}_2(x_2) = p_j \cdot (H - 1), \quad (\text{C.34})$$

where the second equality follows from the definition of \widehat{V}_h for all $h \geq 2$ in Equation (C.28). Thus, for any fixed $j \in [A]$ such that $n_j \geq 1$, we have

$$|(\widehat{\mathbb{B}}_1 \widehat{V}_2)(x_0, b_j) - (\mathbb{B}_1 \widehat{V}_2)(x_0, b_j)| = (H - 1) \cdot \left| \frac{1}{n_j} \sum_{i=1}^{n_j} (\kappa_j^i - p_j) \right| \leq \Gamma_h^\xi(x, b_j)$$

with probability at least $1 - \xi/A$, which is with respect to $\mathbb{P}_{\mathcal{D}}$. Here the first equality follows from Equations (C.30) and (C.34) and the inequality follows from Equation (C.33). Combining Equation (C.32) and taking the union bound over all $j \in [A]$ such that $n_j \geq 1$, we have

$$\mathbb{P}_{\mathcal{D}}\left(\left|(\widehat{\mathbb{B}}_h \widehat{V}_{h+1})(x, a) - (\mathbb{B}_h \widehat{V}_{h+1})(x, a)\right| \leq \Gamma_h^\xi(x, a), \quad \forall (x, a) \in \mathcal{S} \times \mathcal{A}, \forall h \in [H]\right) \geq 1 - \xi.$$

Thus, $\{\Gamma_h^\xi\}_{h=1}^H$ defined in Equation (C.31) are ξ -uncertainty quantifiers.

Step (ii). In the sequel, we apply Theorem 4.2 to $\text{Pess}^*(\mathcal{D})$ and establish the suboptimality upper bound in Proposition C.2. Specifically, by Theorem 4.2, it holds that

$$\text{SubOpt}(\text{Pess}^*(\mathcal{D}); x_0) \leq 2 \sum_{h=1}^H \mathbb{E}_{\pi^*} [\Gamma_h^\xi(s_h, a_h) \mid s_1 = x_0] = 2(H-1) \cdot \sqrt{\frac{\log(2A/\xi)}{1 + n_{j^*}}}, \quad (\text{C.35})$$

with probability at least $1 - \xi$, which is with respect to $\mathbb{P}_{\mathcal{D}}$. Here the last equality follows from Equation (C.31). By Equation (C.7), it holds that

$$\sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x_0 \right] \geq \frac{1}{\sqrt{1 + n_{j^*}}}. \quad (\text{C.36})$$

Note that $\log(2A/\xi) = \log 2 + \log(A/\xi) \leq 2 \log(A/\xi)$ for $A \geq 2$. Combining Equations (C.35) and (C.36), we have

$$\text{SubOpt}(\text{Pess}^*(\mathcal{D}); x_0) \leq c \cdot H \sqrt{\log(A/\xi)} \cdot \sum_{h=1}^H \mathbb{E}_{\pi^*} \left[\left(\phi(s_h, a_h)^\top \Lambda_h^{-1} \phi(s_h, a_h) \right)^{1/2} \mid s_1 = x_0 \right]$$

with probability at least $1 - \xi$, which is taken with respect to $\mathbb{P}_{\mathcal{D}}$. Here $c > 0$ is an absolute constant that can be chosen as $c = 4$. Therefore, we conclude the proof of Proposition C.2. \square

D Supporting Lemmas

The following lemma characterizes the deviation of the sample mean of a random matrix. See, e.g., Theorem 1.6.2 of Tropp (2015) and the references therein.

Lemma D.1 (Matrix Bernstein Inequality (Tropp, 2015)). Suppose that $\{A_k\}_{k=1}^n$ are independent and centered random matrices in $\mathbb{R}^{d_1 \times d_2}$, that is, $\mathbb{E}[A_k] = 0$ for all $k \in [n]$. Also, suppose that such random matrices are uniformly upper bounded in the matrix operator norm, that is, $\|A_k\|_{\text{op}} \leq L$ for all $k \in [n]$. Let $Z = \sum_{k=1}^n A_k$ and

$$v(Z) = \max \left\{ \|\mathbb{E}[ZZ^\top]\|_{\text{op}}, \|\mathbb{E}[Z^\top Z]\|_{\text{op}} \right\} = \max \left\{ \left\| \sum_{k=1}^n \mathbb{E}[A_k A_k^\top] \right\|_{\text{op}}, \left\| \sum_{k=1}^n \mathbb{E}[A_k^\top A_k] \right\|_{\text{op}} \right\}.$$

For all $t \geq 0$, we have

$$\mathbb{P}(\|Z\|_{\text{op}} \geq t) \leq (d_1 + d_2) \cdot \exp\left(-\frac{t^2/2}{v(Z) + L/3 \cdot t}\right).$$

Proof. See, e.g., Theorem 1.6.2 of [Tropp \(2015\)](#) for a detailed proof. \square

The following lemma, which is obtained from [Abbasi-Yadkori et al. \(2011\)](#), establishes the concentration of self-normalized processes.

Lemma D.2 (Concentration of Self-Normalized Processes ([Abbasi-Yadkori et al., 2011](#))). Let $\{\mathcal{F}_t\}_{t=0}^\infty$ be a filtration and $\{\epsilon_t\}_{t=1}^\infty$ be an \mathbb{R} -valued stochastic process such that ϵ_t is \mathcal{F}_t -measurable for all $t \geq 1$. Moreover, suppose that conditioning on \mathcal{F}_{t-1} , ϵ_t is a zero-mean and σ -sub-Gaussian random variable for all $t \geq 1$, that is,

$$\mathbb{E}[\epsilon_t \mid \mathcal{F}_{t-1}] = 0, \quad \mathbb{E}[\exp(\lambda \epsilon_t) \mid \mathcal{F}_{t-1}] \leq \exp(\lambda^2 \sigma^2 / 2), \quad \forall \lambda \in \mathbb{R}.$$

Meanwhile, let $\{\phi_t\}_{t=1}^\infty$ be an \mathbb{R}^d -valued stochastic process such that ϕ_t is \mathcal{F}_{t-1} -measurable for all $t \geq 1$. Also, let $M_0 \in \mathbb{R}^{d \times d}$ be a deterministic positive-definite matrix and

$$M_t = M_0 + \sum_{s=1}^t \phi_s \phi_s^\top$$

for all $t \geq 1$. For all $\delta > 0$, it holds that

$$\left\| \sum_{s=1}^t \phi_s \epsilon_s \right\|_{M_t^{-1}}^2 \leq 2\sigma^2 \cdot \log\left(\frac{\det(M_t)^{1/2} \cdot \det(M_0)^{-1/2}}{\delta}\right)$$

for all $t \geq 1$ with probability at least $1 - \delta$.

Proof. See Theorem 1 of [Abbasi-Yadkori et al. \(2011\)](#) for a detailed proof. \square