

Data InStance Prior (DISP) in Generative Adversarial Networks

Puneet Mangla^{*1}

pmangla@adobe.com

Nupur Kumari^{*2 †}

nupurkmr9@gmail.com

Mayank Singh^{*2 †}

mayanksingh027@gmail.com

Balaji Krishnamurthy¹

kbalaji@adobe.com

Vineeth N Balasubramanian³

vineethnb@iith.ac.in

¹Media and Data Science Research lab, Adobe ²CMU ³IIT Hyderabad, India

Abstract

Recent advances in generative adversarial networks (GANs) have shown remarkable progress in generating high-quality images. However, this gain in performance depends on the availability of a large amount of training data. In limited data regimes, training typically diverges, and therefore the generated samples are of low quality and lack diversity. Previous works have addressed training in low data setting by leveraging transfer learning and data augmentation techniques. We propose a novel transfer learning method for GANs in the limited data domain by leveraging informative data prior derived from self-supervised/supervised pre-trained networks trained on a diverse source domain. We perform experiments on several standard vision datasets using various GAN architectures (BigGAN, SNGAN, StyleGAN2) to demonstrate that the proposed method effectively transfers knowledge to domains with few target images, outperforming existing state-of-the-art techniques in terms of image quality and diversity. We also show the utility of data instance prior in large-scale unconditional image generation.

1. Introduction

Generative Adversarial Networks (GANs) are at the forefront of modern high-quality image synthesis in recent years [4, 25, 24]. GANs have also demonstrated excellent performance on many related computer vision tasks such as image manipulation [73, 18], image editing [42, 51, 19] and compression [54]. Despite the success in large-scale image synthesis, GAN training suffers from a number of drawbacks that arise in practice, such as training instability and mode collapse [12, 2]. This has prompted research in

several non-adversarial generative models [17, 3, 29, 26]. These techniques are implicitly designed to overcome the mode collapse problem, however, the quality of generated samples are still not on par with GANs.

Current state-of-the-art deep generative models require a large volume of data and computation resources. The collection of large datasets of images suitable for training - especially labeled data in case of conditional GANs - can also be a daunting task due to issues such as copyright, image quality. To curb these limitations, researchers have recently proposed techniques inspired by transfer learning [38, 60, 37] and data augmentation [22, 69, 66]. Advancements in data and computation efficiency for image synthesis can enable its applications in data-deficient fields such as medicine [62] where labeled data procurement can be difficult.

Transfer learning is a promising area of research [40, 41] that leverages prior information acquired from large datasets to help in training models on a target dataset under limited data and resource constraints. There has been extensive exploration of transfer learning in classification problems that have shown excellent performance on various downstream data-deficient domains. Similar extensions of reusing pre-trained networks for transfer learning (i.e. fine-tuning a subset of pre-trained network weights from a data-rich domain) have also been recently employed for image synthesis in GANs [60, 38, 37, 59, 68] in the limited data regime. However, these approaches are still prone to overfitting on the sparse target data, and hence suffer from degraded image quality and diversity.

In this work, we propose a simple yet effective way of transferring prior knowledge in unsupervised image generation given a small sample size ($\sim 100\text{-}2000$) of the target data distribution. Our approach is motivated by the formulation of the IMLE technique [29] that seeks to obtain mode coverage of target data distribution by learning a mapping between latent and target distributions using a maximum

^{*}Authors contributed equally

[†]Work done while at Adobe

likelihood criterion. We instead propose the use of data priors in GANs to match the representation of the generated samples to real modes of data. In particular, we show that using an informative *data instance prior* in limited and large-scale unsupervised image generation substantially improves the performance of image synthesis. We show that these data priors can be derived from commonly used computer vision pre-trained networks [52, 67, 38, 17] or self-supervised data representations [5] (without any violation of the target setting’s requirements, i.e. ensuring that the pre-trained network has not been trained on few-shot classes in the few-shot learning setting, for instance). In case of sparse training data, our approach of using data instance priors leverages a model pre-trained on a rich source domain to learn the target distribution. Different from previous works [38, 59, 60] which rely on fine-tuning models trained on a data-rich domain, we propose to leverage the feature representations of the source model as data instance priors, to distill knowledge [45, 16] into the target generative problem setting.

We note that our technique of using instance level priors for transfer learning becomes fully unsupervised in case the data priors are extracted from self-supervised pre-trained networks. Furthermore, in addition to image generation in low data domain, we also achieve state-of-the-art Fréchet inception distance (FID) score [15] on large-scale unsupervised image generation.

We summarize our main contributions as follows:

- We propose Data InStance Prior (DISP), a novel transfer learning technique for GAN image synthesis in low-data regime. We show that employing DISP in conjunction with existing few-shot image generation methods outperforms state-of-the-art results. We show with as little as 100 images our approach DISP results in generation of diverse and high quality images (see Figure 3).
- We demonstrate the utility of our approach in large-scale unsupervised GANs [35, 4]. It achieves the new state-of-the-art in terms of image quality [15] and diversity [47, 34].

We call our method a *data instance prior* (and not just data prior), since it uses representations of instances as a prior, and not a data distribution itself.

2. Related Work

Deep Generative Models In recent years, there has been a surge in the research of deep generative models. Some of the popular approaches include variational auto-encoders (VAEs) [44, 26], auto-regressive (AR) models [57, 56] and GANs [13]. VAE models learn by maximizing the variational lower bound of training data likelihood. Auto-regressive approaches model the data distribution as a product of the conditional probabilities to sequentially generate

data. GANs comprise of two networks, a generator and a discriminator that train in a min-max optimization. Specifically, the generator aims to generate samples to fool the discriminator, while the discriminator learns to distinguish these generated samples from the real samples. Several research efforts in GANs have focused on improving the performance [21, 9, 43, 25, 24, 4, 66] and training stability [48, 14, 1, 35, 32, 7]. Recently, the areas of latent space manipulation for semantic editing [51, 19, 72, 42] and few-shot image generation [59, 37, 38] have gained traction in an effort to mitigate the practical challenges while deploying GANs. Several other non-adversarial training approaches such as [17, 3, 29, 65] have also been explored for generative modeling, which leverage supervised learning along with perceptual loss [67] for training such models.

Transfer Learning in GANs While there has been extensive research in the area of transfer learning for classification models [63, 40, 55, 41, 10], relatively fewer efforts have explored this on the task of data generation [60, 59, 38, 68, 37]. [60] proposed to fine-tune a pre-trained GAN model (often having millions of parameters) from a data-rich source to adapt to the target domain with limited samples. This approach, however, often suffers from overfitting as the final model parameters are updated using only few samples of the target domain. To counter overfitting, the work of [38] proposes to update only the batch normalization parameters of the pre-trained GAN model. In this approach, however, the generator is not adversarially trained and uses supervised L_1 pixel distance loss and perceptual loss [20, 67] which often leads to generation of blurry images in the target domain. Based on the assumption that source and target domain support sets are similar, [59] recently proposed to learn an additional mapping network that transforms the latent code suitable for generating images of target domain while keeping the other parameters frozen. We show that our method DISP outperforms the leading baselines in few-shot image generation including [38, 59, 69].

A related line of recent research aims to improve large-scale unsupervised image generation in GANs by employing self-supervision - in particular, an auxiliary task of rotation prediction [7] or using one-hot labels obtained by clustering in the discriminator’s [30] or ImageNet classifier feature space [46]. In contrast, our method utilizes instance level priors derived from the feature activations of self-supervised/supervised pre-trained networks to improve unconditional few-shot and large-scale image generation, leading to simpler formulation and better performance as shown in our experiments in Section 5.3 and Supplementary. Recently, some methods [22, 69, 66, 70] have leveraged data augmentation to effectively increase the number of samples and prevent overfitting in GAN training. However, data augmentation techniques often times alter the true

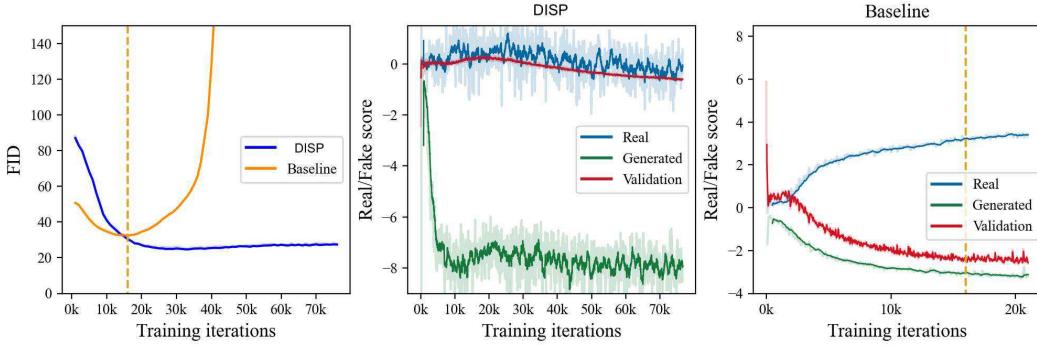


Figure 1: Comparison between DISP and Baseline when trained on 10% data of CIFAR-100. *left*: FID on training set for baseline training starts to increase early (around 15k iterations) unlike the FID curve of DISP training. *middle*: Discriminator score on training and validation images remain similar to each other and consistently higher than score of generated images for DISP model. *right*: Discriminator score on training and validation images diverges and the training collapses for the baseline model.

data distribution and there is a leakage of these augmentations to the generated image, as shown in [70, 69]. To overcome this, [69] recently proposed to use differential augmentation and [22] leveraged an adaptive discriminator augmentation mechanism. We instead focus on leveraging informative instance level priors and also show how our method can be used in conjunction with augmentation techniques [69] to further improve the performance.

3. Preliminaries

We briefly describe Conditional Generative Networks(cGANs) before discussing our methodology. cGANs consists of a generator network G which is trained adversarially with a discriminator network D to learn a target data distribution $q(\mathbf{x}|y)$. Given a noise vector z and a condition vector y , G generates a sample x e.g. an image and the role of D is to distinguish between real samples and those generated from G . Conditional GANs use auxiliary information y for e.g. class label of the sample as input in the generator and discriminator networks. The standard hinge loss [53] for training cGANs is given by:

$$\begin{aligned} L_D &= \mathbb{E}_{y \sim q(y)} [\mathbb{E}_{\mathbf{x} \sim q(\mathbf{x}|y)} [\max(0, 1 - D(\mathbf{x}, y))] \\ &\quad + \mathbb{E}_{y \sim q(y)} [\mathbb{E}_{\mathbf{z} \sim p(\mathbf{z})} [\max(0, 1 + D(G(\mathbf{z}|y), y))]] \quad (1) \\ L_G &= -\mathbb{E}_{y \sim q(y)} [\mathbb{E}_{\mathbf{z} \sim p(\mathbf{z})} [D(G(\mathbf{z}|y), y)]] \end{aligned}$$

where the discriminator score $D(\mathbf{x}, y)$ depends on input image (either real or fake) and conditional label y [36, 39]. The label information is generally passed into G through a one-hot vector concatenated with z or through conditional batch norm layers [8, 11].

4. Methodology

We propose a transfer learning framework, Data Instance Prior (DISP), for training GANs that exploits knowl-

edge extracted from self-supervised/supervised networks, pre-trained on a rich and diverse source domain in the form of instance level priors. GANs are observed to be prone to mode-collapse that is further exacerbated in case of sparse training data. It has been shown that providing class label information in GANs significantly improves training stability and quality of generated images as compared to unconditional setting [36, 7]. We take motivation from the reconstructive framework of IMLE [29] and propose to condition GANs on image instance prior that acts as a regularizer to prevent mode collapse and discriminator overfitting.

Knowledge Transfer in GAN GANs are a class of implicit generative models that minimize a divergence measure between the data distribution $q(\mathbf{x})$ and the generator output distribution $G(\mathbf{z})$ where $\mathbf{z} \sim p(\mathbf{z})$ denotes the latent distribution. Intuitively, the minimization of this divergence objective ensures that each generated sample $G(\mathbf{z})$ is close to some data example $\mathbf{x} \sim q(\mathbf{x})$. However, this does not ensure the converse, i.e. each real sample has a generated sample in its vicinity, which can result in mode dropping. To counter this, especially in limited data regime, we propose to update the parameters of the model so that each real data example is close to some generated sample similar to [29] by using data instance priors as conditional label in GANs. We use the image features extracted from networks pre-trained on a large source domain as the instance level prior to enable transfer of knowledge.

Given a pre-trained feature extractor $C : \mathbb{R}^p \rightarrow \mathbb{R}^d$, which is trained on a source domain using supervisory signals or self-supervision, we use its output $C(\mathbf{x})$ as the conditional information during GAN training. G is conditioned on $C(\mathbf{x})$ using conditional batch-norm [11] whose input is $G_{emb}(C(\mathbf{x}))$, where G_{emb} is a learnable projection matrix. During training we enforce that $G(\mathbf{z}|C(\mathbf{x}))$ is close to the real image \mathbf{x} in discriminator feature space. Let the dis-

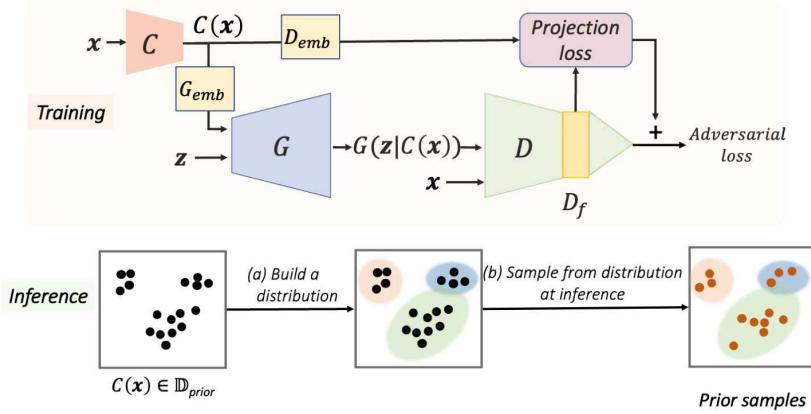


Figure 2: Overview of our proposed technique, Data Instance Priors (DISP) for transfer learning in GANs. *Top:* DISP training with feature $C(\mathbf{x})$ of a real sample \mathbf{x} as a conditional prior in the conditional GAN framework of [36]. C is a pre-trained network on a rich source domain from which we wish to transfer knowledge. *Bottom:* Inference over trained GAN involves learning a distribution over the set of training data prior $\{C(\mathbf{x})\}$ to enable sampling of conditional priors.

criminator be $D = D_l \circ D_f$ (\circ denotes composition) where D_f is discriminator's last feature layer and D_l is the final linear classifier layer. To enforce the above objective we map $C(\mathbf{x})$ to discriminator's feature layer dimension using a trainable projection matrix D_{emb} and minimize distance between $D_{emb}(C(\mathbf{x}))$ and D_f of both real image \mathbf{x} and generated image $G(\mathbf{z}|C(\mathbf{x}))$ in an adversarial manner. Hence, our final GAN training loss for the discriminator and generator is given by:

$$\begin{aligned} L_D &= \mathbb{E}_{\mathbf{x} \sim q(\mathbf{x})} [\max(0, 1 - D(\mathbf{x}, C(\mathbf{x}))) \\ &\quad + \mathbb{E}_{\mathbf{x} \sim q(\mathbf{x}), \mathbf{z} \sim p(\mathbf{z})} [\max(0, 1 + D(G(\mathbf{z}|C(\mathbf{x})), C(\mathbf{x})))] \\ L_G &= -\mathbb{E}_{\mathbf{x} \sim q(\mathbf{x}), \mathbf{z} \sim p(\mathbf{z})} [D(G(\mathbf{z}|C(\mathbf{x})), C(\mathbf{x}))] \end{aligned} \quad (2)$$

where

$$D(\mathbf{x}, \mathbf{y}) = D_{emb}(\mathbf{y}) \cdot D_f(\mathbf{x}) + D_l \circ D_f(\mathbf{x}) \quad (3)$$

In the above formulation, the first term in Eq. 3 is the projection loss as in [36] between input image and conditional embedding of discriminator. Since conditional embedding is extracted from a pre-trained network, above training objective leads to feature level knowledge distillation from C . It also acts as a regularizer on the discriminator reducing its overfitting in the limited data setting. As shown in Figure 1, the gap between discriminator score ($D_l \circ D_f$) of training and validation images keeps on increasing and FID quickly degrades for baseline model as compared to DISP when trained on only 10% data of CIFAR-100. Moreover, enforcing feature $D_f(G(\mathbf{z}|C(\mathbf{x})))$ to be similar to $D_{emb}(C(\mathbf{x}))$ promotes that for each real sample, there exists a generated sample close to it and hence promotes mode coverage of

target data distribution. We demonstrate that the above proposed use of data instance priors from a pre-trained feature extractor, while designed for a limited data setting, also benefits in large-scale image generation. Our overall methodology is illustrated in Figure 2 and pseudo code is provided in the Supplementary section.

Random image generation at inference Given the training set $\mathbb{D}_{image} = \{\mathbf{x}_j\}_{j=1}^n$ of sample size n and its corresponding training data prior set $\mathbb{D}_{prior} = \{C(\mathbf{x}_j)\}_{j=1}^n$, the generator requires access to \mathbb{D}_{prior} for sample generation. In case of few-shot and limited image generation where size of \mathbb{D}_{prior} is less, to create more variations, we generate images conditioned on prior samples from a vicinal mix distribution i.e

$$G(\mathbf{z}|\mathbf{p}) \quad \text{where } \mathbf{p} \sim \mathcal{V}_{mix} \quad (4)$$

The vicinal mix distribution is defined as:

$$\mathcal{V}_{mix}(\mathbf{p}) = \frac{1}{|\mathbb{D}_{prior}|^2} \sum_{i,j}^{|\mathbb{D}_{prior}|} \mathbb{E}_{\lambda} [\delta(\lambda \cdot \mathbf{p}_i + (1 - \lambda) \cdot \mathbf{p}_j)] \quad (5)$$

where $\lambda \sim \mathcal{U}[0, 1]$ and $\delta(\cdot)$ is dirac-delta function

In case of large-scale image generation, we learn a Gaussian Mixture Model (GMM) [61] on \mathbb{D}_{prior} . This enables memory efficient sampling of conditional prior from the learned GMM distribution during inference:

$$G(\mathbf{z}|\mathcal{N}(\mu, \Sigma)) \quad \text{where } \mu, \Sigma \sim \text{GMM}(G_{emb}(\mathbb{D}_{prior})) \quad (6)$$

5. Experiments

We perform extensive experiments to highlight the efficacy of our data instance prior module, DISP in unsu-

Method	Pre-training	SNGAN (128 x 128)						
		Anime			Faces			
		FID ↓	P ↑	R ↑	FID ↓	P ↑	R ↑	
From scratch	✗	120.38	0.61	0.00	140.66	0.31	0.00	
+ DISP-Vgg16		66.85	0.71	0.03	68.49	0.74	0.15	
TransferGAN	✓	102.75	0.70	0.00	101.15	0.85	0.00	
+ DISP-Vgg16		86.96	0.57	0.02	75.21	0.70	0.10	
FreezeD	✓	109.40	0.67	0.00	107.83	0.83	0.00	
+ DISP-Vgg16		93.36	0.56	0.03	77.09	0.68	0.14	
+ DISP-SimCLR		89.39	0.46	0.025	70.40	0.74	0.22	
ADA	✗	78.28	0.87	0.0	159.3	0.69	0.0	
+ DISP-Vgg16		60.8	0.90	0.003	79.5	0.85	0.004	
DiffAugment	✗	85.16	0.95	0.00	109.25	0.84	0.00	
+ DISP-Vgg16		48.67	0.82	0.03	62.44	0.80	0.19	
+ DISP-SimCLR		52.41	0.77	0.04	64.53	0.78	0.22	
BSA*	✓	92.0	-	-	123.2	-	-	
GLANN + DISP-Vgg16		67.07	0.87	0.01	60.11	0.95	0.08	

Table 1: Few-shot image generation performance using 100 training images (↓: lower is better; ↑: higher is better). Precision and Recall scores are based on [28]. FID is computed using 10k, 7k generated and 10k, 7k real samples (disjoint from training set) for Anime and Faces respectively. * denotes directly reported from the paper.

pervised training based on SNGAN [35], BigGAN [4] and StyleGAN2 [25] architectures. For extracting image prior information, we use the last layer activations of: Vgg16 [52] classification network trained on ImageNet; and SimCLR [5] network trained using self-supervision on ImageNet. We conduct experiments on (1) *few-shot* ($\sim 25\text{-}100$ images), (2) *limited* ($\sim 2\text{k}\text{-}5\text{k}$ images) and (3) *large-scale* ($\sim 50\text{k}\text{-}1\text{M}$ images) data settings. For evaluation, we use FID [15], precision and recall scores [28] to assess the quality and mode-coverage/diversity of the generated images.

5.1. Few-Shot Image Generation

Baselines and Datasets We compare and augment our methodology DISP with training SNGAN from scratch and the following leading baselines: Batch Statistics Adaptation (BSA) [38], TransferGAN [60], FreezeD [37], ADA [23] and DiffAugment [69]. In case of BSA, a non-adversarial variant, GLANN [17] is used which optimizes for image embeddings and generative model through perceptual loss¹. We use our data priors to distill knowledge over these image embeddings. For more training and hyperparameter details, please refer to Supplementary.

We perform experiments on randomly chosen 100 images at 128×128 resolution from: (1) Anime² and (2) FFHQ [24] datasets. The above choice of datasets follows from the prior work BSA. For methods with pre-training, we finetune SNGAN pre-trained on ImageNet as done in

¹The code provided with BSA was not reproducible, and hence this choice

²www.gwern.net/Danbooru2018

Method	BigGAN (128 x 128)		
	Places2.5k	FFHQ2k	
		FID ↓	CUB6k
MineGAN		75.50	75.91
TransferGAN		162.91	126.23
+ DISP-Vgg16	57.35	44.43	23.37
FreezeD		191.04	161.87
+ DISP-Vgg16	50.58	43.90	26.90
DiffAugment		56.48	31.60
+ DISP-Vgg16		30.76	23.19
+ DISP-SimCLR	26.65	21.06	12.36

Table 2: FID of different techniques on limited data image generation. FID (lower is better) is computed using 10k, 7k, 6k generated and real samples (disjoint from training set) for Places2.5k, FFHQ2k, CUB datasets respectively. All above approaches are initialized with BigGAN model pre-trained on ImageNet.

[38] (there is no class label intersection of the above datasets with ImageNet classes). We also show additional results at 256×256 resolution on additional datasets (Pandas, Grumpy Cat, Obama) with StyleGAN2 [25] in supplementary.

Results Using DISP shows consistent improvement in FID and Recall over all baseline methods as shown in Table 5. Fig 3 shows samples generated via interpolation between conditional embedding of models trained via DISP-Vgg on DiffAugment and vanilla DiffAugment. These results qualitatively show the improvement obtained using our DISP transfer learning approach. Comparatively, the baseline, vanilla DiffAugment, fails to generate realistic interpolation and for the most part, presents memorized training set images. DISP also performs better when training is done from scratch as compared to FreezeD and TransferGAN but is worse than DiffAugment + DISP. We present additional ablation studies in Supplementary.

Performance on varying number of training images We vary the number of training examples in Anime dataset from 25-500 for baseline few-shot algorithms and their respective augmentations with DISP-Vgg16. The FID metric comparison in Fig 3c shows the benefit of our approach when used with existing training algorithms. The FID metric for all approaches improves (decreases) with the increase the number of training images with DISP out-performing corresponding baselines. Sample images generated by our approach are shown in Supplementary.

Memorization Test To evaluate whether trained GANs are actually generating novel images instead of only memorizing the training set, we calculate FID between images randomly sampled from training set with repetition and the

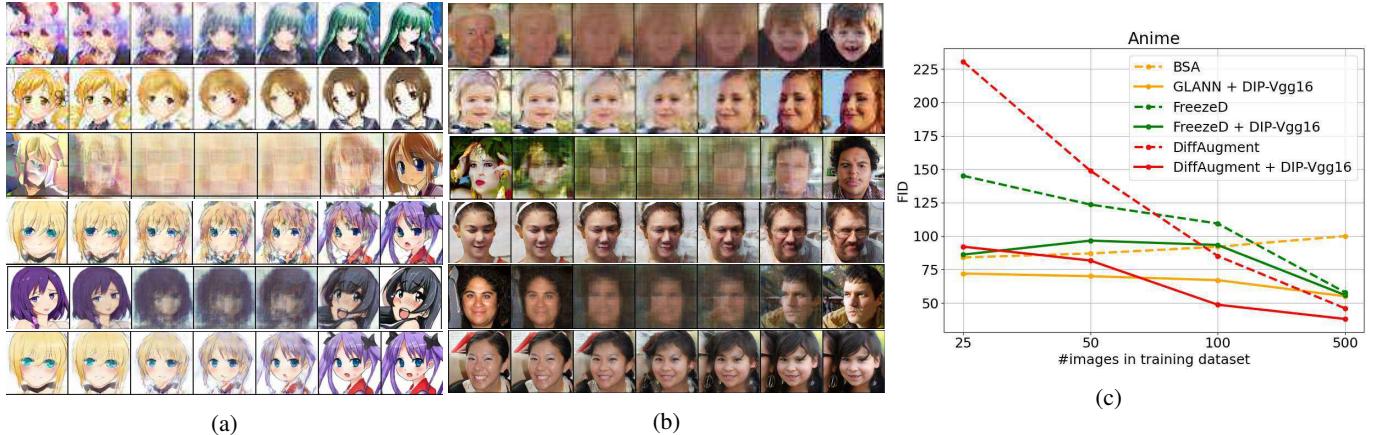


Figure 3: (a) and (b): Sample interpolations between two generated images for models trained in few-shot setting : Scratch (Row 1), Scratch + DISP-Vgg16 (Row 2), FreezeD (Row 3), FreezeD + DISP-Vgg16 (Row 4), DiffAugment (Row 5), DiffAugment + DISP-Vgg16 (Row 6). (c): FID (lower is better) performance graph of few-shot image generation by varying the training samples from 25 to 500 images of Anime dataset for different approaches on SNGAN model.

separate test set for Anime and FFHQ dataset. For Anime dataset, we get an FID of 81.23 and for FFHQ, 100.07. On comparing these numbers to Table 5 we observe that only on using DISP with existing algorithms, we achieve a better FID score suggesting that our approach is able to generate novel/diverse samples instead of just memorizing or overfitting to training data.

Analyzing the feature space of Vgg-16/SimCLR pre-trained network for Anime dataset To examine the usefulness of Vgg features on Anime dataset, we evaluate it on the anime character classification task. We took a subset of 70k images from the Anime Face dataset that had labels assigned among the 50 character tags. Each character tag has around 1000-1500 images. We train a single linear classifier on Vgg-16 features of 50k samples and evaluate it on the rest 20k samples. We observe an accuracy of 75% and 67% on training and test sets respectively. When a single linear classifier is trained upon SimCLR features, the respective accuracies were 81% and 63.5%. This highlights that even for fine-grained and out of domain distributions like Anime, pre-trained Vgg-16 features are semantically rich enough to achieve a decent classification score.

5.2. Limited Data Image Generation

In many practical scenarios, we have access to moderate number of images (1k-5k) instead of just a few examples, however the limited data may still not be enough to achieve stable GAN training. We show the benefit of our approach in this setting and compare our results with: MineGAN[59], TransferGAN, FreezeD, and DiffAugment. We perform experiments on three 128×128 resolution datasets: FFHQ2k, Places2.5k and CUB6k following [59]. FFHQ2k contains

2K training samples from FFHQ [24] dataset. Places2.5k is a subset of Places365 dataset [71] with 500 examples each sampled from 5 classes (alley, arch, art gallery, auditorium, ball-room). CUB6k is the complete training split of CUB-200 dataset [58]. We use the widely used BigGAN [4] architecture, pre-trained on ImageNet for finetuning. Table 2 shows our results; using DISP consistently improves FID on existing baselines by a significant margin. More implementation details are given in supplementary and sample generated images via our approach are shown in Figure 4.

Experiments on CIFAR-10 and CIFAR-100 We also experiment with unconditional BigGAN and StyleGAN2 model on CIFAR-10 and CIFAR-100 while varying the amount of data as done in [69]. We compare DISP with DiffAugment on all settings and the results are shown in Table 3. In the limited data setting (5% and 10%) augmenting DiffAugment with DISP gives the best results in terms of FID for both BigGAN and StyleGAN2 architectures. When trained on complete training dataset DISP slightly outperforms DiffAugment on BigGAN architecture. For implementation details, please refer to supplementary.

5.3. Large-Scale Image Generation

In order to show the usefulness of our method on large-scale image generation, we carry out experiments on CIFAR-10, CIFAR-100 [27] and ImageNet- 32×32 datasets with 50k, 50k and $\sim 1.2M$ training images respectively at 32×32 resolution. For a higher 128×128 resolution, we perform experiments on FFHQ and LSUN-bedroom [64] datasets with 63k and 3M training samples. We use a ResNet-based architecture for both discriminator and generator similar to BigGAN [4] for all our experiments. We also compare DISP with SSGAN [7] and Self-Conditional GAN



Figure 4: Samples of generated image in limited data training setting : FreezeD (*Row 1*), FreezeD + DISP-Vgg16 (*Row 2*), DiffAugment (*Row 3*) and DiffAugment + DISP-Vgg16 (*Row 4*).

Method	CIFAR-10			CIFAR-100		
	100% data	20% data	10% data	100% data	20% data	10% data
BigGAN	17.22	31.25	42.59	20.37	33.25	42.43
+ DISP	9.70	16.24	27.86	12.89	21.70	31.48
+ DiffAugment	10.39	15.12	18.56	13.33	19.78	23.80
+ DiffAugment & DISP	9.52	14.24	18.50	12.70	16.91	20.47
StyleGAN2*	11.07	23.08	36.02	16.54	32.30	45.87
+ DiffAugment*	9.89	12.15	14.5	15.22	16.65	20.75
+ DiffAugment & DISP	9.50	10.92	12.03	14.45	15.52	17.33

Table 3: Comparison of FID on Unconditional CIFAR-10 and CIFAR-100 image generation while varying the amount of training data. Here, all mentioned approaches are trained with random-horizontal flip augmentation of real images. BigGAN-DiffAugment includes consistency regularization [66] following the implementation provided by authors [69]. We report the checkpoint with the best FID value for each model. * denotes directly reported from paper.

[30]. Implementation and training hyperparameter details are provided in Supplementary.

Results Table 4 reports the FID, precision and recall score on the generated samples and the test set for baselines and our approach (DISP). For fitting GMM, the number of components are fixed to $1K$ for all datasets. DISP achieves better FID, precision and recall scores compared to leading baselines. Sample qualitative results and generation with latent interpolation are shown in the supplementary. We also evaluate the quality of inverted images for 128×128 resolution on FFHQ and LSUN datasets using Inference via Optimization Measure (IvOM) [34] to emphasize the high instance-level data coverage in the prior space of GANs trained through our approach (details on IvOM calculation are provided in supplementary). Table 7 shows the IvOM and FID metric between inverted and real query images. Figure 5 shows sample inverted images. We observe both from qualitative and quantitative perspective, models trained via DISP inverts a given query image better than the corresponding baselines. We also perform an ablation experiment to analyze the effect of different priors in DISP for CIFAR-100 dataset. As shown in Table 8, the FID metric remains relatively similar for different priors when compared to the baseline.

Memorization test For analyzing memorization in GANs, we evaluate it on the recently proposed test to detect

data copying [33]. The test calculates whether generated samples are closer to the training set as compared to a separate test set in the inception feature space using three sample Mann-Whitney U test [31]. The test statistic $C_T << 0$ represents overfitting and data-copying, whereas $C_T >> 0$ represents underfitting. We average the test statistic over 5 trials and report the results in Table 6. We can see that using data instance priors during GAN training does not lead to data-copying according to the test statistic except in case of FFHQ dataset where both DISP and baseline C_T values are also negative.

Performance gain due to knowledge distillation vs Memorization of real image features We conduct an additional experiment where we use the features of a Resnet50 network trained on 75% label-corrupted CIFAR-100 as Data Instance Priors to train CIFAR-100 BigGAN architecture. This results in a significantly higher FID (22.82) in comparison to using prior feature from Resnet50-SimCLR trained on clean CIFAR100 dataset,(FID 14.62, Table 8). This highlights that performance depends on the quality of pre-trained network features and not only because features of real images are leveraged as prior during generation. If this was not the case then using features of Resnet50 trained on 75% label-corrupted CIFAR-100 would have resulted in similar performance.

Method	CIFAR-10			CIFAR-100			FFHQ			LSUN-Bedroom			ImageNet32x32		
	FID ↓	P ↑	R ↑	FID ↓	P ↑	R ↑	FID ↓	P ↑	R ↑	FID ↓	P ↑	R ↑	FID ↓	P ↑	R ↑
Baseline	19.73	0.64	0.70	24.66	0.61	0.67	21.67	0.77	0.47	9.89	0.58	0.42	16.19	0.60	0.67
SSGAN	15.65	0.67	0.68	21.02	0.61	0.65	-	-	-	7.68	0.59	0.50	17.18	0.61	0.65
Self-Cond GAN	16.72	0.71	0.64	21.8	0.64	0.60	-	-	-	-	-	-	15.56	0.66	0.63
DISP-Vgg16	11.24	0.74	0.64	15.71	0.70	0.62	15.83	0.76	0.55	4.99	0.66	0.54	12.11	0.64	0.62
DISP-SimCLR	14.42	0.68	0.65	20.08	0.67	0.62	16.62	0.77	0.53	4.92	0.62	0.53	14.99	0.60	0.63

Table 4: Comparison of DISP with Baseline, SSGAN[7] and Self-Cond GAN[30] in large-scale image generation setting.

Method	50k	100k	200k	500k
GMM	4.99	4.92	4.81	4.43
Time (s)	383.96	1063.99	1993.93	4397.56

Table 5: Relationship among the number of random samples used in the GMM, FID value obtained and the time taken for learning the GMM.

Methods	CIFAR-10	CIFAR-100	FFHQ	LSUN	ImageNet 32x32
	C_T	C_T	C_T	C_T	C_T
Baseline	3.02	4.26	-0.15	2.59	10.5
DISP-Vgg16	1.58	3.05	-0.81	1.06	8.53
DISP-SimCLR	2.86	3.48	-1.49	0.13	9.91

Table 6: Test for evaluating data-copy and memorization in GANs [33] for different approaches and datasets. Test statistic $C_T \ll 0$ denotes overfitting and data-copying, and $C_T > 0$ represents under-fitting.

Method	FFHQ		LSUN-Bedroom	
	IvOM ↓	FID ↓	IvOM ↓	FID ↓
Baseline	0.0386	85.06	0.0517	115.02
+ DISP-Vgg16	0.0142	73.85	0.0191	129.4
+ DISP-SimCLR	0.0125	71.44	0.0161	116.11

Table 7: IvOM and FID measure on 500 random test images of FFHQ and LSUN-Bedroom datasets.

Relationship between the number of random samples used for fitting GMM and its corresponding FID

Fitting a GMM model is inhibitive for large-scale datasets e.g. ImageNet and LSUN-Bedroom where the training data is in millions. We observed this during our experiments and therefore use a subset of randomly sampled 200K instances for these datasets for fitting GMM in Table 4. Table 5 further shows the relationship between the number of random samples used for fitting GMM and the corresponding FID (average of 3 runs with a standard deviation of less than 1%) on the LSUN-Bedroom dataset for DISP-Vgg16 trained model on LSUN-Bedroom. As can be seen, even a small subset of training data can still be used to achieve better performance than baselines in relatively less time. This experiment was performed on a system with 32 CPU cores, 64 GB RAM, and processor Intel(R) Xeon(R) CPU @ 2.20GHz.

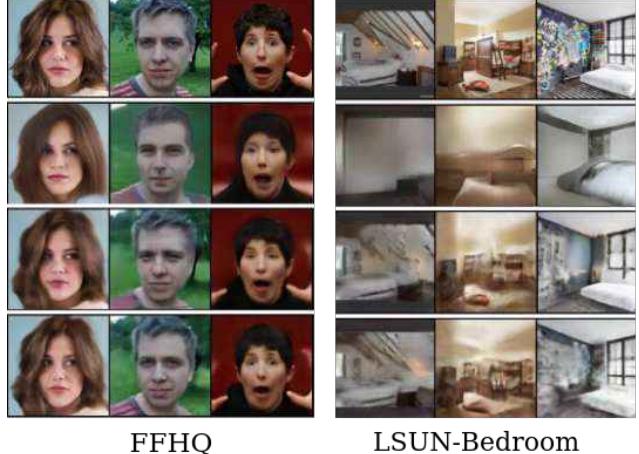


Figure 5: Images generated through IvOM for randomly sampled test set images on FFHQ and LSUN-Bedroom. (Top to Bottom:) Original images, Baseline, Baseline + DISP-Vgg16, Baseline + DISP-SimCLR.

Method	CIFAR-100
Baseline	24.66
+ DISP-SimCLR (ImageNet)	16.26
+ DISP-SimCLR (CIFAR-100)	14.62
+ DISP-ResNet50 (Places-365)	14.68
+ DISP-Resnet50 (ImageNet)	14.62

Table 8: Comparison of FID when using prior from different pre-trained models on CIFAR-100.

6. Conclusion

In this work, we present a novel instance level prior based transfer learning approach to improve the quality and diversity of images generated using GANs when a few training data samples are available. By leveraging features as priors from rich source domain in limited unsupervised image synthesis, we show the utility of our simple yet effective approach on various standard vision datasets and GAN architectures. We demonstrate the efficacy of our approach in image generation with limited data, where it achieves the new state-of-the performance, as well as on large-scale settings. As future work, it would be interesting to explore the application of prior information in image editing tasks.

References

- [1] Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *International Conference on Machine Learning*, pages 214–223, 2017.
- [2] Sanjeev Arora, Rong Ge, Yingyu Liang, Tengyu Ma, and Yi Zhang. Generalization and equilibrium in generative adversarial nets (gans). In *ICML*, 2017.
- [3] Piotr Bojanowski, Armand Joulin, David Lopez-Pas, and Arthur Szlam. Optimizing the latent space of generative networks. In *International Conference on Machine Learning*, pages 600–609, 2018.
- [4] Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale gan training for high fidelity natural image synthesis. In *International Conference on Learning Representations*, 2018.
- [5] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. *arXiv preprint arXiv:2002.05709*, 2020.
- [6] Ting Chen, Mario Lucic, Neil Houlsby, and Sylvain Gelly. On self modulation for generative adversarial networks. In *International Conference on Learning Representations*, 2018.
- [7] Ting Chen, Xiaohua Zhai, Marvin Ritter, Mario Lucic, and Neil Houlsby. Self-supervised gans via auxiliary rotation loss. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 12154–12163, 2019.
- [8] Harm De Vries, Florian Strub, Jérémie Mary, Hugo Larochelle, Olivier Pietquin, and Aaron C Courville. Modulating early visual processing by language. In *Advances in Neural Information Processing Systems*, pages 6594–6604, 2017.
- [9] Emily L Denton, Soumith Chintala, Rob Fergus, et al. Deep generative image models using a laplacian pyramid of adversarial networks. In *Advances in neural information processing systems*, pages 1486–1494, 2015.
- [10] Jeff Donahue, Yangqing Jia, Oriol Vinyals, Judy Hoffman, Ning Zhang, Eric Tzeng, and Trevor Darrell. Decaf: A deep convolutional activation feature for generic visual recognition. In *International conference on machine learning*, pages 647–655, 2014.
- [11] Vincent Dumoulin, Jonathon Shlens, and Manjunath Kudlur. A learned representation for artistic style. *arXiv preprint arXiv:1610.07629*, 2016.
- [12] Ian Goodfellow, Yoshua Bengio, Aaron Courville, and Yoshua Bengio. *Deep learning*, volume 1. MIT Press, 2016.
- [13] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. In *Advances in neural information processing systems*, pages 2672–2680, 2014.
- [14] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of wasserstein gans. In *Advances in neural information processing systems*, pages 5767–5777, 2017.
- [15] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *NeurIPS*, 2017.
- [16] Geoffrey Hinton, Oriol Vinyals, and Jeffrey Dean. Distilling the knowledge in a neural network. In *NIPS Deep Learning and Representation Learning Workshop*, 2015.
- [17] Yedid Hoshen, Ke Li, and Jitendra Malik. Non-adversarial image synthesis with generative latent nearest neighbors. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 5811–5819, 2019.
- [18] Phillip Isola, Jun-Yan Zhu, Tinghui Zhou, and Alexei A Efros. Image-to-image translation with conditional adversarial networks. In *CVPR*, 2017.
- [19] Ali Jahanian, Lucy Chai, and Phillip Isola. On the "steerability" of generative adversarial networks. In *ICLR*, 2020.
- [20] Justin Johnson, Alexandre Alahi, and Li Fei-Fei. Perceptual losses for real-time style transfer and super-resolution. In *European conference on computer vision*, pages 694–711. Springer, 2016.
- [21] Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of gans for improved quality, stability, and variation. In *ICLR*, 2018.
- [22] Tero Karras, Miika Aittala, Janne Hellsten, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Training generative adversarial networks with limited data. *arXiv preprint arXiv:2006.06676*, 2020.
- [23] Tero Karras, Miika Aittala, Janne Hellsten, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Training generative adversarial networks with limited data. In H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 12104–12114. Curran Associates, Inc., 2020.
- [24] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4401–4410, 2019.
- [25] Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of stylegan. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8110–8119, 2020.
- [26] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. In *ICLR*, 2014.
- [27] Alex Krizhevsky, Vinod Nair, and Geoffrey Hinton. Cifar-10. URL <http://www.cs.toronto.edu/kriz/cifar.html>, 2010.
- [28] Tuomas Kynkänniemi, Tero Karras, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Improved precision and recall metric for assessing generative models. In *Advances in Neural Information Processing Systems*, pages 3927–3936, 2019.
- [29] Ke Li and Jitendra Malik. Implicit maximum likelihood estimation. *arXiv preprint arXiv:1809.09087*, 2018.
- [30] Steven Liu, Tongzhou Wang, David Bau, Jun-Yan Zhu, and Antonio Torralba. Diverse image generation via self-conditioned gans. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2020.

- [31] Henry B Mann and Donald R Whitney. On a test of whether one of two random variables is stochastically larger than the other. *The annals of mathematical statistics*, pages 50–60, 1947.
- [32] Xudong Mao, Qing Li, Haoran Xie, Raymond YK Lau, Zhen Wang, and Stephen Paul Smolley. Least squares generative adversarial networks. In *Proceedings of the IEEE international conference on computer vision*, pages 2794–2802, 2017.
- [33] Casey Meehan, Kamalika Chaudhuri, and Sanjoy Dasgupta. A non-parametric test to detect data-copying in generative models. *arXiv preprint arXiv:2004.05675*, 2020.
- [34] Luke Metz, Ben Poole, David Pfau, and Jascha Sohl-Dickstein. Unrolled generative adversarial networks. *ICLR*, 2017.
- [35] Takeru Miyato, Toshiki Kataoka, Masanori Koyama, and Yuichi Yoshida. Spectral normalization for generative adversarial networks. In *ICLR*, 2018.
- [36] Takeru Miyato and Masanori Koyama. cgans with projection discriminator. In *International Conference on Learning Representations*, 2018.
- [37] Sangwoo Mo, Minsu Cho, and Jinwoo Shin. Freeze the discriminator: a simple baseline for fine-tuning gans. In *CVPR AI for Content Creation Workshop*, 2020.
- [38] Atsuhiro Noguchi and Tatsuya Harada. Image generation from small datasets via batch statistics adaptation. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 2750–2758, 2019.
- [39] Augustus Odena, Christopher Olah, and Jonathon Shlens. Conditional image synthesis with auxiliary classifier gans. In *International conference on machine learning*, pages 2642–2651, 2017.
- [40] Maxime Oquab, Leon Bottou, Ivan Laptev, and Josef Sivic. Learning and transferring mid-level image representations using convolutional neural networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2014.
- [41] Sinno Jialin Pan and Qiang Yang. A survey on transfer learning. *IEEE Transactions on knowledge and data engineering*, 22(10):1345–1359, 2009.
- [42] Antoine Plumerault, Hervé Le Borgne, and Céline Hudelot. Controlling generative models with continuous factors of variations. In *ICLR*, 2020.
- [43] Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. In *International Conference on Learning Representations*, 2016.
- [44] Danilo Jimenez Rezende, Shakir Mohamed, and Daan Wierstra. Stochastic backpropagation and approximate inference in deep generative models. In *ICML*, 2014.
- [45] Adriana Romero, Nicolas Ballas, Samira Ebrahimi Kahou, Antoine Chassang, Carlo Gatta, and Yoshua Bengio. Fitnets: Hints for thin deep nets. In *ICLR*, 2015.
- [46] Alexander Sage, Eirikur Agustsson, Radu Timofte, and Luc Van Gool. Logo synthesis and manipulation with clustered generative adversarial networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 5879–5888, 2018.
- [47] Mehdi S. M. Sajjadi, Olivier Bachem, Mario Lučić, Olivier Bousquet, and Sylvain Gelly. Assessing Generative Models via Precision and Recall. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [48] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. In *Advances in neural information processing systems*, pages 2234–2242, 2016.
- [49] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. In *NeurIPS*, 2016.
- [50] Edgar Schonfeld, Bernt Schiele, and Anna Khoreva. A u-net based discriminator for generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8207–8216, 2020.
- [51] Yujun Shen, Jinjin Gu, Xiaolu Tang, and Bolei Zhou. Interpreting the latent space of gans for semantic face editing. In *CVPR*, 2020.
- [52] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- [53] Dustin Tran, Rajesh Ranganath, and David M Blei. Deep and hierarchical implicit models. *arXiv preprint arXiv:1702.08896*, 7:3, 2017.
- [54] Michael Tschauder, Eirikur Agustsson, and Mario Lucic. Deep generative models for distribution-preserving lossy compression. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [55] Eric Tzeng, Judy Hoffman, Trevor Darrell, and Kate Saenko. Simultaneous deep transfer across domains and tasks. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 4068–4076, 2015.
- [56] Aaron Van den Oord, Nal Kalchbrenner, Lasse Espeholt, Oriol Vinyals, Alex Graves, et al. Conditional image generation with pixelcnn decoders. In *Advances in neural information processing systems*, pages 4790–4798, 2016.
- [57] Aaron Van Oord, Nal Kalchbrenner, and Koray Kavukcuoglu. Pixel recurrent neural networks. In *International Conference on Machine Learning*, pages 1747–1756, 2016.
- [58] C. Wah, S. Branson, P. Welinder, P. Perona, and S. Belongie. The caltech-ucsd birds-200-2011 dataset. Technical Report CNS-TR-2011-001, California Institute of Technology, 2011.
- [59] Yaxing Wang, Abel Gonzalez-Garcia, David Berga, Luis Herranz, Fahad Shahbaz Khan, and Joost van de Weijer. Minegan: Effective knowledge transfer from gans to target domains with few images. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [60] Yaxing Wang, Chenshen Wu, Luis Herranz, Joost van de Weijer, Abel Gonzalez-Garcia, and Bogdan Raducanu. Transferring gans: generating images from limited data. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 218–234, 2018.
- [61] Lei Xu and Michael I. Jordan. On convergence properties of the em algorithm for gaussian mixtures. *Neural Computation*, 8(1):129–151, Jan. 1996.

- [62] Xin Yi, Ekta Walia, and Paul Babyn. Generative adversarial network in medical imaging: A review. *Medical image analysis*, 58:101552, 2019.
- [63] Jason Yosinski, Jeff Clune, Yoshua Bengio, and Hod Lipson. How transferable are features in deep neural networks? In *Advances in Neural Information Processing Systems 27*, pages 3320–3328, 2014.
- [64] Fisher Yu, Ari Seff, Yinda Zhang, Shuran Song, Thomas Funkhouser, and Jianxiong Xiao. Lsun: Construction of a large-scale image dataset using deep learning with humans in the loop. *arXiv preprint arXiv:1506.03365*, 2015.
- [65] Ning Yu, Ke Li, Peng Zhou, Jitendra Malik, Larry Davis, and Mario Fritz. Inclusive gan: Improving data and minority coverage in generative models. In *European Conference on Computer Vision*, pages 377–393. Springer, 2020.
- [66] Han Zhang, Zizhao Zhang, Augustus Odena, and Honglak Lee. Consistency regularization for generative adversarial networks. In *International Conference on Learning Representations*, 2019.
- [67] Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *CVPR*, 2018.
- [68] Miao Yun Zhao, Yulai Cong, and Lawrence Carin. On leveraging pretrained gans for generation with limited data. In *ICML*, 2020.
- [69] Shengyu Zhao, Zhijian Liu, Ji Lin, Jun-Yan Zhu, and Song Han. Differentiable augmentation for data-efficient gan training. *arXiv preprint arXiv:2006.10738*, 2020.
- [70] Zhengli Zhao, Sameer Singh, Honglak Lee, Zizhao Zhang, Augustus Odena, and Han Zhang. Improved consistency regularization for gans. *arXiv preprint arXiv:2002.04724*, 2020.
- [71] Bolei Zhou, Aditya Khosla, Agata Lapedriza, Aude Oliva, and Antonio Torralba. Object detectors emerge in deep scene cnns. *arXiv preprint arXiv:1412.6856*, 2014.
- [72] Jiapeng Zhu, Yujun Shen, Deli Zhao, and Bolei Zhou. In-domain gan inversion for real image editing. In *Proceedings of European Conference on Computer Vision (ECCV)*, 2020.
- [73] Jun-Yan Zhu, Taesung Park, Phillip Isola, and Alexei A Efros. Unpaired image-to-image translation using cycle-consistent adversarial networkss. In *Computer Vision (ICCV), 2017 IEEE International Conference on*, 2017.

Supplementary

7. Few-Shot Image Generation

Few-shot image generation (StyleGAN2) We follow the experimental setting of [69] and show performance on 100-shot Obama, Panda and Grumpy Cat datasets (having 256×256 resolution) using FFHQ [24] pre-trained StyleGAN2 model. Table 9 shows DISP training leads to consistent improvement in FID scores over several baseline techniques except on Grumpy Cat dataset. We hypothesize that this is because the prior features of this dataset has low diversity and hence the priors used are not informative enough to lead to improved performance with DISP.

Method	Style-GAN 2 (256 x 256)		
	Panda FID ↓	Grumpy Cat FID ↓	Obama FID ↓
FreezeD + DISP-Vgg16	16.69 14.66	29.67 29.93	62.26 54.87
DiffAugment + DISP-Vgg16	12.06 11.14	27.08 28.45	46.87 43.79
BSA*	21.38	34.20	50.72
GLANN + DISP-Vgg16	11.51	29.85	38.57

Table 9: 100-shot image generation results using StyleGAN2 [25] model pre-trained on FFHQ dataset for Panda, Grumpy-cat and Obama datasets. FID is computed between 5k generated and the complete training dataset. * denotes directly reported from the paper [69].

Impact of loss function To analyze the role of GAN loss function, we show the performance of DISP with different variants. Specifically, we choose these three loss functions: hinge loss (originally in our experiments), non-saturating loss [13] and the wasserstein loss [1]. Table 10 shows the corresponding results when DISP is used with FreezeD and DiffAugment. We observe that in case of FreezeD+DISP wasserstein loss significantly outperforms non-saturating loss and hinge loss. In case of DiffAugment hinge loss performs best followed by non-saturating loss and wasserstein loss.

Samples by varying number of training images Figure 6 shows samples generated by our approach when we vary the number of training examples in Anime dataset from 25-500. For quantitative results please refer Figure 3c in main submission.

Implementation Details We summarize the training procedure of DISP in Algorithm 1.

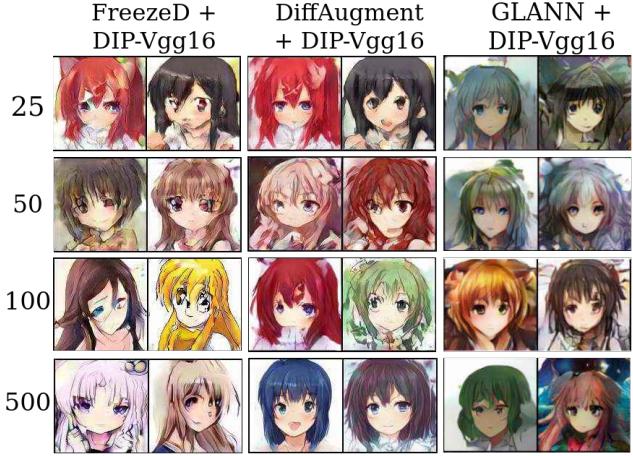


Figure 6: Samples of few-shot image generation on varying the number of training data from 25 to 500 images of Anime dataset using DISP along with different approaches with SNGAN backbone.

Method	Pre-training	SNGAN (128 x 128)					
		Anime		Faces			
		H	NS	W	H	NS	W
FreezeD + DISP-Vgg16	✓	109.40 93.36	102.43 82.49	148.99 74.91	107.83 77.09	105.34 77.38	209.23 71.05
DiffAugment + DISP-Vgg16	✗	85.16 48.67	106.96 48.61	252.11 56.43	109.25 62.44	107.18 68.66	325.85 81.03

Table 10: Comparison between different loss functions in few-shot image generation using 100 training images (FID: lower is better). H is hinge loss, NS is non saturating loss and W is wasserstein loss.

In SNGAN architecture, while training with DISP, G_{emb} and D_{emb} are matrices which linearly transform the pre-trained features into generator conditional space of dimension 128 and discriminator feature space of dimension 1024. For baseline training, we use an embedding for each of the 100 training images to ensure minimal difference between baseline and our approach without increasing number of parameters. We also experimented with self-modulated [6] and unconditional training which resulted in either training collapse or worse results in all approaches. In DiffAugment, we use three augmentations: translation, cutout, and color with consistency regularization hyperparameter as 10 and training is done from scratch following the implementation in their paper [69]. In FreezeD, we freeze the first five blocks of the discriminator and finetune the rest. We use spectral normalization for both generator and discriminator during training with batch size of 25, number of discriminator steps as 4, G and D learning rate as $2e-4$, z dimension as 120 and maximum number of training steps as

Algorithm 1: Data InStance Prior (DISP) training algorithm

```

1 Input:  $G, D$  network with parameters  $\theta_G$  and  $\theta_D$ , pre-trained
  model  $C$  for extracting prior condition, samples from real data
  distribution  $q(x)$  and latent distribution  $p(z)$ , batch size  $b$ ,
  number of training iterations, discriminator update steps  $d_{step}$ 
  for each generator update, Adam optimizer hyperparameters
   $\alpha, \beta_1, \beta_2$ .
2 for number of training iterations do
3   for  $t : 1 \dots d_{step}$  do
4     Sample batch  $x \sim q(x), z \sim p(z)$ 
5      $x_{fake} = G(z|C(x))$ 
6      $D(x, C(x)) = D_f(x) \cdot D_{emb}(C(x)) + D_l \circ D_f(x)$ 
7      $D(x_{fake}, C(x)) =$ 
       $D_f(x_{fake}) \cdot D_{emb}(C(x)) + D_l \circ D_f(x_{fake})$ 
8      $L_D = \max(0, 1 - D(x, C(x))) + \max(0, 1 +$ 
       $D(x_{fake}, C(x)))$ 
9     Update  $\theta_D \leftarrow Adam(L_D, \alpha, \beta_1, \beta_2)$ 
10    end
11    Sample  $z \sim p(z)$ 
12    Generate images  $x_{fake} = G(z|C(x))$ 
13     $D(x_{fake}, C(x)) =$ 
       $D_f(x_{fake}) \cdot D_{emb}(C(x)) + D_l \circ D_f(x_{fake})$ 
14     $L_G = -D(x_{fake}, C(x))$ 
15    Update  $\theta_G \leftarrow Adam(L_G, \alpha, \beta_1, \beta_2)$ 
16  end
17 return  $\theta_G, \theta_D$ .

```

$30K$. During evaluation, moving average weights [49] of the generator is used in all experiments unless stated otherwise. For FID calculation, we select the snapshot with best FID similar to [7, 69]. For calculating precision and recall based on the k-nearest neighbor graph of inception features, as in [28], we use k as 10 for Precision and 40 for Recall.

For StyleGAN2, G_{emb} is a 2-layer MLP with ReLU non-linearity which maps $C(\mathbf{x})$ to a 512-dimensional generator conditional space. It is then concatenated with random noise \mathbf{z} of dimension 512 which is used as input in the mapping network. D_{emb} is a linear transformation matrix and discriminator loss is projection loss combined with real/fake loss. Training is done with batch-size of 16 for DiffAugment³ and 8 for FreezeD⁴ till $20k$ steps.

In case of BSA, we show that DISP can be used to improve the results on similar non-adversarial generative models. Specifically, we perform experiments with GLANN⁵ which is a two step training procedure, as follows: (1) Optimize for image embeddings $\{\mathbf{e}_i\}$ of all training images $\{\mathbf{x}_i\}$ jointly with a generator network G using perceptual loss; and (2) Learn a sampling function $T : \mathbf{z} \rightarrow \mathbf{e}$ through IMLE for generating random images during inference. For using data instance prior in the training procedure of GLANN, instead of directly optimizing for $\{\mathbf{e}_i\}$, we optimize for the

following modified objective:

$$\arg \min_{G, G_{emb}} \sum_i L_{perceptual}(G \circ G_{emb} \circ C(\mathbf{x}_i), \mathbf{x}_i) \quad (7)$$

where $\{\mathbf{e}_i\} = \{G_{emb} \circ C(\mathbf{x}_i)\}$

We finetune the pre-trained generator on batch-size of 50 with a learning rate of 0.01 for 4000 epochs. During second step of IMLE optimization, we use a 3-layer MLP with \mathbf{z} dimension as 64 and train for 500 epochs with a learning rate of 0.05.

Comparison with Logo-GAN Logo-GAN [46] has shown advantage of using features from pre-trained ImageNet network in unconditional training by assigning class label to each instance based on clustering in the feature space. We compare our approach with this method in the few-shot data setting. For implementing logo-GAN, we perform class-conditional training [35] using labels obtained by K-means clustering on Vgg16 features of 100-shot Anime dataset. The results reported in Table 11 show the benefit of directly using features as data instance prior instead of only assigning labels based on feature clustering.

Method	Anime (SNGAN) FID ↓
FreezeD + DISP	93.36
FreezeD + Logo-GAN (K=5)	226.60
FreezeD + Logo-GAN (K=10)	183.38
DiffAugment + DISP	48.67
DiffAugment + Logo-GAN (K=5)	130.54
DiffAugment + Logo-GAN (K=10)	190.59

Table 11: 100-shot image generation comparison of DISP with Logo-GAN [46] on Anime dataset where priors are derived from Vgg16 network trained on ImageNet. FID is computed between 10k generated and real samples (disjoint from training set).

8. Limited data Image Generation

Experiments on CIFAR-10 and CIFAR-100 For results shown in Table 3 of main submission, BigGAN model used for training CIFAR-10 and CIFAR-100 is same as the one used for large scale experiments in Section 5.3 of main submission. In DiffAugment with BigGAN architecture, we use all three augmentations: translation, cutout, and color along with consistency regularization hyperparameter as 10. In DiffAugment + DISP consistency regularization hyperparameter is changed to 1. For experiments on StyleGAN2 architecture we use the code-base of DiffAugment⁶.

³<https://github.com/mit-han-lab/data-efficient-gans>

⁴<https://github.com/sangwoomo/FreezeD>

⁵<https://github.com/yedidh/glann>

⁶<https://github.com/mit-han-lab/data-efficient-gans/tree/master/DiffAugment-stylegan2>

Pearson Correlation	Anime	FFHQ	CIFAR-10
D_f cosine vs VGG Perceptual	0.65	0.81	0.80
D_f cosine vs Image L_2	-0.46	-0.61	-0.54

Table 12: Pearson Correlation between cosine similarity in Discriminator feature space (D_f) vs Vgg-16 perceptual similarity/ L_2 distance in Image space on Anime, FFHQ and CIFAR-10 dataset

Implementation details of experiment on 128 Resolution datasets with BigGAN architecture in Section 5.2 of main submission We use our approach in conjunction with existing methodologies in a similar way as the few-shot setting with G_{emb} and D_{emb} as linear transformation matrices which transform the data priors into the generator’s conditional input space of dimension 128 and discriminator feature space of dimension 1536. During baseline training, we use self-modulation [6] in the batch-norm layers similar to [7, 50]. In DiffAugment, we use three augmentations: translation, cutout, and color with consistency regularization hyperparameter as 10. During FreezeD training, we freeze the first 4 layers of discriminator. For TransferGAN, FreezeD, MineGAN and its augmentation with DISP, we use the following hyperparameter setting: batch size 256, G and D lr $2e - 4$ and \mathbf{z} dimension 120. For DiffAugment, batch size is 32, D-steps is 4 and rest of the hyperparameters are same. Training is done till 30k steps for DiffAugment, FreezeD, and 5k steps for the rest. The moving average weights of the generator are used for evaluation. We use pre-trained network from ⁷ [4] for finetuning.

9. Large-Scale Image Generation

Cosine Similarity	x and $G(z C(x))$	Random pair
VGG perceptual space	0.512 ± 0.067	0.382 ± 0.050
Discriminator’s feature space	0.59 ± 0.096	0.50 ± 0.070

Table 13: Similarity between x and $G(z|C(x))$ vs Similarity between a random pair of images from FFHQ dataset.

Image inversion To invert a query image, \mathbf{x}_q using our trained model, we optimize the prior (after passing it to G_{emb}) that is used to condition each resolution block, independently. Mathematically, we optimize the following objective:

$$\begin{aligned} \mathbf{z}^*, C_1^*, ..C_k^* &= \arg \min_{\mathbf{z}, C_1, ..C_k} \|G(\mathbf{z}|C_1, ..C_k) - \mathbf{x}_q\|_2^2, \\ \mathbf{x}_q^{inv} &= G(\mathbf{z}^*|C_1^*, ..C_k^*) \end{aligned}$$

Here, C_i (after passing it through G_{emb}) is the prior that is used to condition the $i^{th} \in \{1..k\}$ resolution block. To get a faster and better convergence, we initialize all C_i


⁷<https://github.com/ajbrock/BigGAN-PyTorch>

as $G_{emb}(C(\mathbf{x}_q))$. The optimization is achieved via back-propagation using Adam optimizer with learning rate of 0.1. Figure 5 (main submission) shows sample inverted images on FFHQ and LSUN-Bedroom datasets. From the figure, we can see that models trained via DISP invert a given query image better than the corresponding baselines.

Equivalence of closeness in latent and image space In our algorithm, we use projection loss in discriminator latent space D_f to enforce that a generated image $G(z|C(x))$ is semantically similar/close to a given image x . And to verify if discriminator latent space is indeed good space to measure similarities, we measure the correlation between cosine similarity in Discriminator feature D_f and Vgg-16 feature (perceptual similarity) space. Vgg-perceptual similarity is an accepted measure of image similarity and has been used in generative models like IMLE, GLANN, BSA as a proxy for constraints in image space. Additionally, we also report the correlation between cosine similarity in Discriminator feature space and L_2 closeness measure in the image space. Table 12 reports our findings where we observe a high positive correlation between cosine similarity in D_f and VGG perceptual similarity; and a moderate negative correlation between cosine similarity D_f in and L_2 distance in Image space.

To quantitatively verify that $G(z|C(x))$ is close to x in the trained model, we also show in Table 13, the perceptual similarity between the two as compared to a random pair of images from FFHQ dataset. We can observe that x and $G(z|C(x))$ are more similar than any random pair of images.

Implementation Details We use a single linear layer to transform the pre-trained image features to the generator’s conditional input space of 128 dimensions, and discriminator feature space of 1024 dimensions respectively. A hierarchical latent structure similar to [4] is used during DISP training. During evaluation with K-means and GMM on ImageNet and LSUN-Bedroom we first randomly sample 200K training images and then fit the distribution since clustering on complete training set which is in the order of millions is infeasible. In the training of the unconditional baseline, we use self-modulation [6]. In SSGAN, for rotation loss we use the default parameter of 0.2 for generator and 1.0 for discriminator as mentioned in [7]. For training Self-Conditional GAN [30], we set the number of clusters to 100 for all datasets. For CIFAR-10 and CIFAR-100, we re-cluster at every 25k iterations with 25k samples, and for ImageNet, at every 75k iterations with 50k samples following default implementation as in [30]. Following standard practice [66], we calculate FID, Precision and Recall between test split and an equal number of generated images for-10, CIFAR-100, and ImageNet 32×32 , i.e., 10k, 10k, and 50k, respectively. For FFHQ and LSUN-bedroom datasets, we

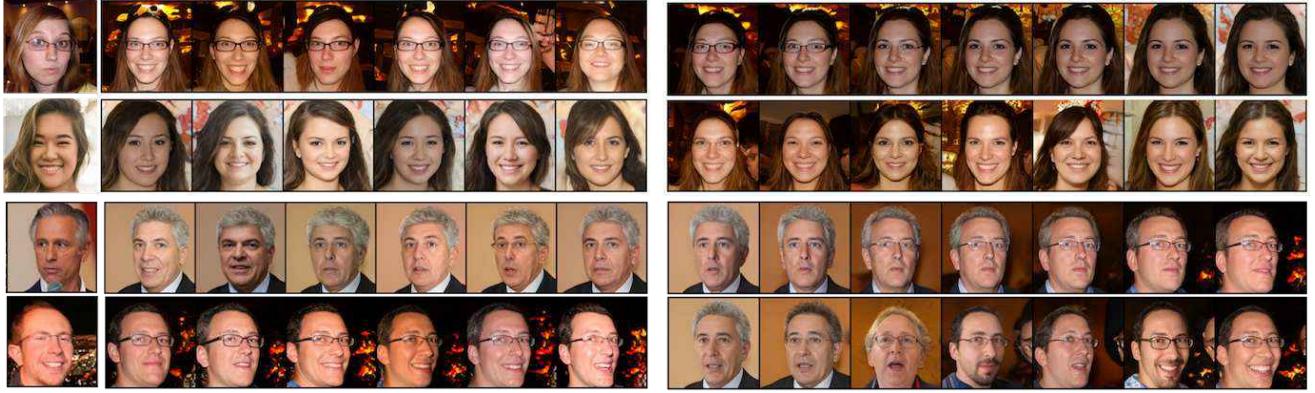

(a) Semantic Variations - First column corresponds to image whose Vgg16 features are given as prior to DISP module. Rest columns correspond to images generated using random noise. As can be seen the generated images are consistent with the prior image in terms of high-level semantics.

(b) Interpolation - First and last column corresponds to images used for interpolation. Rest columns correspond to images generated when Vgg16 features of images in first and last column are interpolated and given as prior to DISP module.

Figure 7: Semantic variations and interpolation of generated samples using pre-trained Vgg16 conditional DISP module on FFHQ dataset. (*Left (top and bottom):*) Random samples generated with prior as feature of the first column of images in each row; (*Right (top and bottom):*) all 4 rows show interpolation of images between the generated image in the first and last column.

use 7k and 30k generated and real (disjoint from training) samples, respectively. For all datasets and methods, training is done with batch size of 64, G and D learning rate is set to 0.0002, \mathbf{z} dimension equals 120 and spectral normalization is used in both generator and discriminator networks. Training is done till 100k steps for all datasets except ImageNet which is trained for 200k steps and moving average weights of generator are used during evaluation.


Semantic diffusion for image manipulation We observed that high-level semantics (e.g. hair, gender, glasses, etc in case of faces) of a generated image, $G(\mathbf{z}|C(\mathbf{x}))$, relied on the conditional prior, $C(\mathbf{x})$. Complementarily, variations in the latent code $\mathbf{z} \sim N(0, I)$ induced fine-grained changes such as skin texture, face shape, etc. This suggests that we can exploit conditional prior, $C(\mathbf{x})$, to get some control over the high-level semantics of generated image. We show that by altering an image \mathbf{x} (through CutMix, CutOut, etc) and using $C(\mathbf{x})$ of the altered image as our new input prior helps in generating samples with the desired attributes, as shown in Fig 8. In a similar manner, DISP also allows generation of images with certain cues (like sketch to image generation, as shown in Fig 8). The generation of samples in this case is simply done by using $C(\mathbf{x})$ as prior in G .



(a) Custom Editing - First column shows human-edited version where certain portion of image is substituted with another to achieve desired semantics. Rest columns correspond to images generated when Vgg16 features of human-edited version is provided as prior to DISP module.



(b) Sketch-to-Image - First column shows sketch describing desired high-level semantics. Rest columns correspond to images generated when Vgg16 features of the sketch version is provided as prior in DISP module.

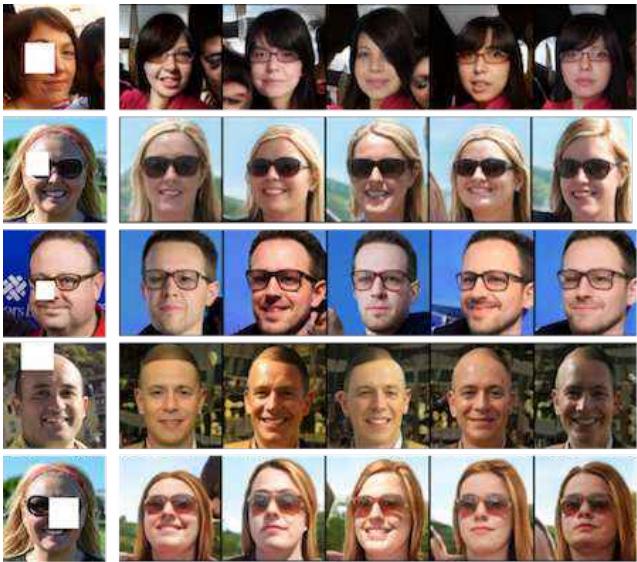

(c) Inpainting - First column shows a cutout in an Image. Rest columns correspond to images generated when Vgg16 features of the cutout version is provided as prior in DISP module.



(d) Colourization - First column shows gray-scale image describing desired high-level semantics. Rest columns correspond to images generated when Vgg16 features of the gray-scale version is provided as prior in DISP module.

Figure 8: Examples of semantic diffusion used in image manipulation on FFHQ dataset using our DISP-Vgg16 approach. *Top-Left:* Custom Editing; *Top-Right:* Sketch-to-Image; *Bottom-Left:* Inpainting; *Bottom-Right:* Colorization



(a) CIFAR-10



(b) CIFAR-100



(c) ImageNet-32x32



(d) FFHQ



(e) LSUN-Bedroom

Figure 9: Samples generated by our DISP-Vgg16 approach on large-scale image generation