


More Control for Free!

Image Synthesis with Semantic Diffusion Guidance

Xihui Liu¹ Dong Huk Park¹ Samaneh Azadi¹ Gong Zhang^{2,3}
 Arman Chopikyan² Yuxiao Hu² Humphrey Shi^{2,3} Anna Rohrbach¹ Trevor Darrell¹
¹UC Berkeley ²Picsart AI Research (PAIR) ³University of Oregon

(a) Image synthesis with language guidance

A smiling woman with straight, blonde hair wearing sunglasses.

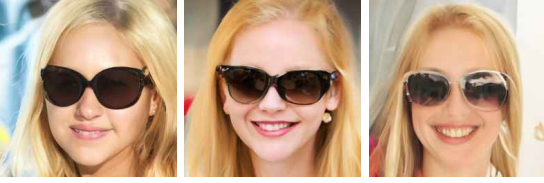

(b) Image synthesis with image guidance

Image Guidance



Generated images



(c) Image synthesis with both language and image guidance

Language Guidance + Image Guidance

A photo of a woman with curly hair. +




Figure 1. Our unified framework is flexible and allows fine-grained semantic control in image synthesis via language guidance, image guidance or both at once. Our method can be applied to datasets without paired image-caption data.

Abstract

Controllable image synthesis models allow creation of diverse images based on text instructions or guidance from an example image. Recently, denoising diffusion probabilistic models have been shown to generate more realistic imagery than prior methods, and have been successfully demonstrated in unconditional and class-conditional settings. We explore fine-grained, continuous control of this model class, and introduce a novel unified framework for semantic diffusion guidance, which allows either language or image guidance, or both. Guidance is injected into a pre-trained unconditional diffusion model using the gradient of image-text or image matching scores. We explore CLIP-based textual guidance as well as both content and style-based image guidance in a unified form. Our text-guided synthesis approach can be applied to datasets without associated text annotations. We conduct experiments on FFHQ

and LSUN datasets, and show results on fine-grained text-guided image synthesis, synthesis of images related to a style or content example image, and examples with both textual and image guidance.¹

1. Introduction

Image synthesis has made great progress in recent years [4, 8, 20, 29, 34]. In addition to the goal of generating high-quality photo-realistic images, fine-grained control over the generated images is also an important desideratum when assisting users with art creation and design.

Previous works have explored controllable image synthesis by adding different conditions, including language [34, 45, 48], attributes [38, 44, 49], scene graphs [7], and user sketch or scribbles [3]. Specifically, text-to-image

¹Project page [xh-liu.github.io/sdg/](https://github.com/xh-liu/sdg/)

synthesis, as shown in Figure 1-(a), aims to generate images based on text instructions, by adding text embeddings as conditional information to the image generation network. However, most previous text-to-image synthesis methods require image-caption pairs for training, and cannot generalize to datasets without text annotations.

Besides text instructions, users may also want to guide the image generation model with a reference image. E.g., a user might want to generate cat images which look similar to a given photo of a cat in terms of its appearance. This information cannot be easily described by language, but can be provided via a reference image, as shown in Figure 1-(b). Moreover, sometimes a user may want to provide both language and image guidance. For example, a user might seek to generate “a woman with curly hair” that looks similar to a reference image of a woman with red hair, as illustrated in Figure 1-(c).

Current image-conditioned synthesis techniques would either only transfer the “style” of a reference image to a target image [2, 17] or are restricted to the domains with a well-defined structure such as the human or animal faces [17, 44]. However, they cannot generate diverse images with variant pose, structure, and layout based on a single reference image.

We propose *Semantic Diffusion Guidance (SDG)*, a unified framework for text-guided and image-guided synthesis that overcomes these limitations. Our model is based on denoising diffusion probabilistic models (DDPM) [15] which generates an image from a noise map and iteratively remove noise to approach the data distribution of natural images.

We inject the semantic input by using a guidance function to guide the sampling process of an unconditional diffusion model. This enables more controllable generation in diffusion models and gives us a unified formulation for both language and image guidance. Specifically, our language guidance is based on the image-text matching score predicted by the CLIP [33] finetuned on noisy images. As for the image guidance, depending on what information we seek in the image, we define two options: content and style guidance. The flexibility of the guidance module allows us to inject either language or image guidance alone or both at once into any unconditional diffusion model without the need for re-training.

Our unified framework is flexible and allows fine-grained semantic control in image synthesis with various applications, as shown in Figure 1. We show that our model can handle: (1) Text-guided image synthesis with a complex fine-grained text query on any dataset *without language annotations*; (2) Image-guided image synthesis with content or style control from an input image, which generates diverse images with different pose, structure, and layout; (3) Multi-modal guidance for image synthesis with both language and image input. Our guidance network can be in-

jected into an off-the-shelf unconditional diffusion models, *without the need for finetuning or re-training* the diffusion model. We conduct experiments on FFHQ [9] and LSUN [47] datasets to validate the quality, diversity, and controllability of our generated images, and show various applications of our proposed Semantic Diffusion Guidance.

2. Related Work

Text-guided Synthesis Pioneered by GAN-INT-CLS [36] and GAWWN [37], conditional generative adversarial networks (GANs) [12] have been the dominant framework for text-based image synthesis [19, 23, 32, 42, 46, 50]. Recent work DALL-E [34] shows promising results with transformers [43] and discrete VAE [35] by leveraging web-scale data.

Despite great advancements, most prior methods require paired image-text annotations which limits the application to certain datasets or requires large amount of data and computational resources for training. Our proposed framework is able to generate images on multiple domains given detailed text prompts, requiring neither image-text paired data from those domains nor large amount of compute.

Image-guided Synthesis Image-guided synthesis aims at generating diverse images that are similar to a given reference image. Many style transfer works fall under this category where the content of the input image must be preserved while the style of the reference image transferred [1, 10, 11, 13, 16, 22, 24–26, 30], yet they struggle to generate diverse images. ILVR [6] proposes a way to iteratively inject image guidance to a diffusion model, yet it exhibits limited structural diversity. Instance-Conditioned GAN [5] utilizes nearest neighbor images of a given reference for adversarial training to generate structurally diverse yet semantically relevant images. Nonetheless, it requires training the GAN model with instance-conditioned techniques. Our approach demonstrates better controllability as users can decide how much semantic, structural, or style information to preserve by using different types and scales of guidance, while does not need to re-train the unconditional diffusion model.

Diffusion Models Diffusion models are a new type of generative models consisting of a forward process (signal to noise) and a reverse process (noise to signal). The denoising diffusion probabilistic model (DDPM) [15] is a latent variable model where a denoising autoencoder gradually transforms Gaussian noise into real signal. Score-based generative model [39, 40] trains a neural network to predict the score function which are used to draw samples via Langevin Dynamics. Collectively, these models have demonstrated comparable or superior image quality compared to GANs while exhibiting better mode coverage and

training stability. Diffusion models have also been explored for conditional generation such as class-conditional generation, image-guided synthesis, super-resolution, and image-to-image translation [6, 8, 28, 41]. In this work, we further explore whether diffusion models can be semantically guided by text or image, or both to synthesize realistic images.

CLIP-guided Generation CLIP [33] is a powerful vision-language joint embedding model trained on large-scale images and texts. Its representations have been shown to be robust and general enough to perform zero-shot classification and various vision-language tasks on diverse datasets. StyleCLIP [31] and StyleGAN-NADA [9] have demonstrated that CLIP enables text-guided *image manipulation* without domain-specific image-text pairs. However, the application to *image synthesis* has not been explored. Our work investigates text and/or image guided synthesis using CLIP and unconditional DDPM.

3. Semantic Diffusion Guidance

We propose *Semantic Diffusion Guidance (SDG)*, a new unified framework that incorporates different forms of guidance into a pretrained unconditional diffusion model. SDG can leverage language guidance, image guidance, and multimodal guidance, enabling controllable image synthesis. The guidance module can be injected into any off-the-shelf unconditional diffusion model without re-training or finetuning it. We only need to finetune the guidance network, which is a CLIP [33] model in our implementation, on the images with different levels of noise. We propose a self-supervised finetuning scheme, which does not require language data.

In Section 3.1, we review the preliminaries on diffusion models, and introduce our approach for injecting guidance into the diffusion model for controllable image synthesis. In Section 3.2, we illustrate the language guidance which enables the unconditional diffusion model to perform text-to-image synthesis. In Section 3.3, we propose two types of image guidance, which take the content and style information from the reference image as the guidance signal, respectively. In Section 3.5, we explain how we finetune the CLIP guidance network without requiring text annotations in the target domain.

3.1. Guiding Diffusion Models for Controllable Image Synthesis

Diffusion models define a Markov chain where random noise is gradually added to the data, known as the forward process. Formally, given a data point sampled from a real-data distribution $x_0 \sim q(x)$, the forward process sequen-

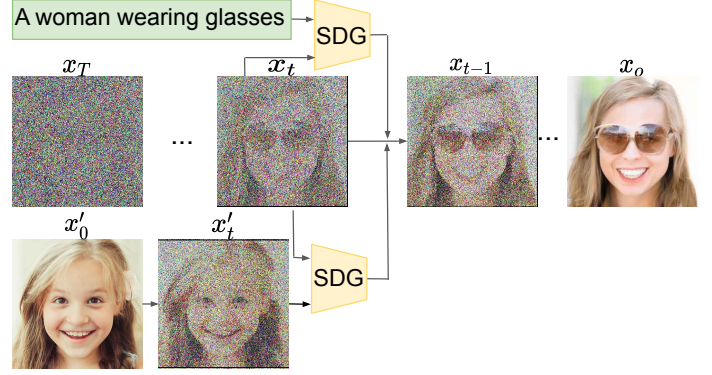


Figure 2. An overview of our method. We control the diffusion generation process by the Semantic Diffusion Guidance (SDG) with language and/or reference image. SDG is iteratively injected to each step of generation process.

tially adds Gaussian noise to the sample over T timesteps:

$$q(x_t|x_{t-1}) = \mathcal{N}(x_t; \sqrt{1 - \beta_t}x_{t-1}, \beta_t\mathbf{I})$$

$$q(x_{1:T}|x_0) = \prod_{t=1}^T q(x_t|x_{t-1}), \quad (1)$$

where $\{\beta_t\}_{t=1:T}$ denotes a constant or learned variance schedule. A property of the forward process is that we can sample x_t from x_0 in a closed form:

$$q(x_t|x_0) = \sqrt{\alpha_t}x_0 + \epsilon\sqrt{1 - \alpha_t}, \epsilon \sim \mathcal{N}(0, 1) \quad (2)$$

where $\alpha_t = 1 - \beta_t$ and $\bar{\alpha}_t = \prod_{s=1}^t \alpha_s$.

Generative modeling is done by learning the backward process where the forward process is reversed via a parameterized diagonal Gaussian transition:

$$p_\theta(x_{t-1}|x_t) = \mathcal{N}(x_{t-1}; \mu_\theta(x_t), \sigma_\theta^2(x_t)\mathbf{I}) \quad (3)$$

We choose the notation $p_\theta(x_{t-1}|x_t) = \mathcal{N}(\mu_\theta, \sigma_\theta^2\mathbf{I})$ for brevity. In order to learn the backward process, neural networks are trained to predict μ_θ and σ_θ^2 .

The formulations above explain the unconditional backward process $p_\theta(x_{t-1}|x_t)$; with an extra guidance signal y , the sampling distribution becomes:

$$p_{\theta,\phi}(x_{t-1}|x_t, y) = Zp_\theta(x_{t-1}|x_t)p_\phi(y|x_{t-1}), \quad (4)$$

where Z is a normalizing constant. It is proven in [8] that the new distribution after incorporating the guidance can also be approximated by a Gaussian distribution with shifted mean:

$$p_{\theta,\phi}(x_{t-1}|x_t)p_\phi(y|x_{t-1}) = \mathcal{N}(\mu + \Sigma g, \Sigma), \quad (5)$$

where $\mu = \mu_\theta$, $\Sigma = \sigma_\theta^2\mathbf{I}$, $g = \nabla_{x_{t-1}} \log p_\phi(y|x_{t-1})$.

Class-guided synthesis was explored in [8] where y is a discrete class label. In our SDG, we generalize y to a continuous embedding for language, image or multimodal guidance. In the next subsections, we introduce how we define the guidance function $F_\phi(x_t, y, t) = \log p_\phi(y|x_t)$ for different guidance.

Figure 2 and Algorithm 1 summarize the proposed Semantic Diffusion Guidance. Note that there is an additional scaling factor s for semantic guidance in Algorithm 1 which in a user-controllable hyper-parameter that determines the strength of the guidance. We discuss its effect in Section 4.

Algorithm 1: Semantic Diffusion Guidance

Input: guidance y , scaling factor s
Given: diffusion model $(\mu_\theta, \sigma_\theta)$, Guidance function $F_\phi(x_t, y, t)$
 $x_T \leftarrow \text{sample from } \mathcal{N}(0, \mathbf{I})$
for $t = T, \dots, 1$ **do**
 $\mu, \Sigma \leftarrow \mu_\theta, \sigma_\theta^2 \mathbf{I}$
 $x_{t-1} \leftarrow \text{sample from}$
 $\mathcal{N}(\mu + s\Sigma\nabla_{x_t} F_\phi(x_t, y, t), \Sigma)$
end for
return x_0

3.2. Language Guidance

Language is one of the most intuitive ways that a user can control the generation model. In order to incorporate language information to the image synthesis process, we use a visual-semantic embedding model for image-text alignment. Specifically, given an image x and a text prompt l , the model embeds them into the joint embedding space using an image encoder E_I and a text encoder E_L , respectively. The similarity between the embeddings $E_I(x)$ and $E_L(l)$ is calculated as the cosine distance, and we utilize this to formulate the language guidance function.

However, note that the models for backward process and guidance in Equation 5 are time-dependent, and take noisy images as input. This means that the image encoder E_I needs to incorporate timestep as input and be further trained on noisy images as well. We denote such time-dependent image encoder for noisy images as E'_I . Finally, the language guidance function can be defined as:

$$F(x_t, l, t) = E'_I(x_t, t) \cdot E_L(l), \quad (6)$$

In Section 3.5, we provide details on adapting a pretrained CLIP model [33] to become time-dependent with minimal architecture changes, and present a self-supervised finetuning strategy for noisy images.

3.3. Image Guidance

In some cases, an image can convey information that is difficult to express in language. For example, users may want to generate a photo of a cat that looks similar to another cat. They may also want to generate realistic images given an emoji or a painting. We thus propose an approach that effectively controls the content or style information according to an image. We present two types of image guidance, namely *image content guidance* and *image style guidance*.

Image Content Guidance aims to control the content of the generated image, with or without structural constraints, based on a reference, and is formulated as the cosine similarity of the image feature embeddings. Let x'_0 denote the noise-free reference image. We perturb x'_0 per Equation 2 to get x'_t . Then, the guidance signal at timestep t is,

$$F(x_t, x'_t, t) = E'_I(x_t, t) \cdot E'_I(x'_t, t). \quad (7)$$

Similar to language guidance, we use an image encoder finetuned with noisy images to define the image guidance function. An interesting property of using image encoders for guidance is that one can control how much structural information such as pose and viewpoint is maintained from the reference image. For instance, the embeddings used in Equation 7 do not have spatial dimensions, resulting in samples with great variations in pose and layout. However, by utilizing spatial feature maps and forcing alignment between features in corresponding spatial locations, we can guide the generated image to additionally share similar structure with the reference image:

$$F(x_t, x'_t, t) = - \sum_j \frac{1}{C_j H_j W_j} \|E'_I(x_t, t)_j - E'_I(x'_t, t)_j\|_2^2 \quad (8)$$

where $E'_I(\cdot)_j \in \mathcal{R}^{C_j \times H_j \times W_j}$ denotes the spatial feature maps of the j -th layer of the image encoder E'_I .

Image Style Guidance allows style transfer from the reference image. It is formulated similarly, except the alignment between the Gram matrices of the intermediate feature maps is enforced:

$$F(x_t, x'_t, t) = - \sum_j \|G'_I(x_t, t)_j - G'_I(x'_t, t)_j\|_F^2, \quad (9)$$

where $G'_I(\cdot)_j$ is the Gram matrix [18] of the j -th layer feature map of the image encoder E'_I .

3.4. Multimodal Guidance

In some application scenarios, image and language may contain complementary information, and allowing both image and language guidance at the same time provides further

flexibility for user control. Our pipeline can easily incorporate both by a weighted sum of the two guidance functions, with their scaling factors as weights.

$$F_{\phi_0}(x_t, y, t) = s_1 F_{\phi_1}(x_t, y, t) + s_2 F_{\phi_2}(x_t, y, t). \quad (10)$$

By adjusting the weighting factors of each modality, users can control the balance between the two.

3.5. Self-supervised Finetuning of CLIP without Text Annotations

CLIP [33] is a powerful vision and language model pre-trained on large-scale image-text data. We leverage its semantic knowledge to achieve controllable synthesis for diffusion models. To act as a guidance function, CLIP is expected to handle noisy images x_t at any timestep t . We make a minor architectural change to CLIP image encoder E_I to accept an additional input t by converting batch normalization layers to adaptive batch normalization layers, where the prediction of scale and bias terms are conditioned on t . We denote this modified CLIP image encoder as \widetilde{E}_I . The parameters of \widetilde{E}_I are initialized by the parameters of a pretrained CLIP model E_I , except for the parameters for predicting the scale and bias of the adaptive batch normalization layers.

To finetune \widetilde{E}_I , we propose a self-supervised approach in which the task is to force an alignment between features extracted from clean and noisy images. Formally, given a batch of N pairs of clean and noisy images $\{x_0^i, x_{t_i}^i\}_{i=1}^N$ where t_i is the timestep sampled for the i -th image that governs the amount of noise, we encode x_0^i and $x_{t_i}^i$ with E_I and \widetilde{E}_I , respectively. We rely on the contrastive objective used in CLIP to maximize the cosine similarity of the N positive pairs while minimizing the similarity of the remaining negative pairs. We fix the parameters of E_I and use the contrastive objective to finetune the parameters of \widetilde{E}_I . With our finetuned CLIP model, the diffusion model can be guided by image or language information that users provide, not requiring any language data for the target dataset.

4. Experiments

4.1. Dataset and Implementation Details

We conduct experiments on FFHQ [9] and LSUN [47] cat, horse, and bedroom subsets. FFHQ dataset contains 70,000 images of human faces. LSUN contains 3 million bedroom images, 2 million horse images, and 1.7 million cat images. We use unconditional DDPMs from [8], and finetune CLIP ResNet 50×16 models on noisy images on each dataset. Refer to the appendix for more details.

4.2. Quantitative Evaluation

4.2.1 Evaluation Setup

We evaluate the **language-guided** generation on FFHQ. For that we define 400 text instructions based on combinations of gender and face attributes from CelebA-Attributes [27]. For example, “A photo of a smiling man with glasses”. The entire list of text instructions is included in the supplementary material. We generate 25 images for each text query, which results in 10,000 images in total. We compare our language-guided generation with StyleCLIP [31], which uses CLIP loss to optimize the latent space of StyleGAN [21]. To adapt StyleCLIP to text-based image synthesis, we remove the input image encoding and start the CLIP-based optimization from random latent codes. **Image-guided** synthesis is evaluated on FFHQ and LSUN cat, horse, and bedroom datasets, where we randomly choose images from the training set as guidance (10,000 samples for each dataset). We compare our image-guided generation results with ILVR [6].

4.2.2 Quantitative Results

We present results on image-guided synthesis in Table 1 and language-guided synthesis in Table 2.

FID for image quality evaluation. We report FID score [14] for each dataset. Lower FID indicates better generation quality. Overall the FID of the our SDG approach is comparable to the baseline without guidance. The image-guided generation on FFHQ is better than the baseline without guidance, while the guided models have slightly worse FID on LSUN dataset. We also observe that as the scaling factor (see Sec 3.1 for details) gets larger, the guidance signal has more control on the generation results. However, if the guidance gets too large, e.g., “Scaling factor 400” in Table 1, the distribution to sample from is shifted too much, and the model is not able to generate realistic images. Note that the FID for language-guided synthesis is not directly comparable to the synthesis result without guidance, because of the distribution misalignment between the text instructions and the real data distribution, i.e., the 400 text instructions defined by us may not align perfectly with the real data distribution in FFHQ dataset.

LPIPS for diversity evaluation. We calculate the LPIPS score between paired images generated from the same image guidance or the same text guidance, as shown in Table 1 and Table 2. Higher LPIPS indicates more diversity. Our model generates more diverse images compared to previous work ILVR [6] and StyleCLIP [31]. We also observe that higher scaling factor leads to less diversity and more consistency with the guidance. Users can adjust the scaling factor to control how diverse they expect the generated images to be. We show examples with different scaling factors

		Quality	Diversity	Correctness (retrieval evaluation)			
		FID	LPIPS	Top 1	Top 5	Top 10	Top 20
FFHQ	ILVR (N=32) [6]	17.15	0.439	0.205	0.416	0.556	0.727
	baseline w/o guidance	16.91	0.677	0.01	0.05	0.10	0.20
	SDG (100)	15.50	0.490	0.354	0.584	0.704	0.842
	SDG (200)	14.37	0.583	0.520	0.742	0.816	0.906
	SDG (400)	20.47	0.490	0.438	0.596	0.699	0.785
LSUN Cat	baseline w/o guidance	13.09	0.727	0.01	0.05	0.10	0.20
	SDG (100)	16.02	0.617	0.178	0.443	0.592	0.766
	SDG (200)	16.23	0.565	0.278	0.533	0.738	0.880
LSUN Horse	baseline w/o guidance	8.78	0.689	0.01	0.05	0.10	0.20
	SDG (100)	10.30	0.597	0.165	0.418	0.568	0.704
	SDG (200)	11.22	0.585	0.298	0.609	0.738	0.863
LSUN Bedroom	baseline w/o guidance	4.94	0.727	0.01	0.05	0.10	0.20
	SDG (100)	5.18	0.633	0.364	0.745	0.866	0.942
	SDG (200)	5.19	0.550	0.445	0.805	0.900	0.951

Table 1. Quantitative evaluation of our proposed SDG with image guidance and comparison to prior work. The numbers in the brackets after “SDG” indicates the scaling factor. For FID, the lower, the better. For other scores, the higher, the better.

		Quality	Diversity	Correctness (retrieval accuracy)			
		FID	LPIPS	Top 1	Top 5	Top 10	Top 20
FFHQ	StyleCLIP [31]	57.45	0.578	0.749	0.934	0.974	0.996
	SDG (120)	19.60	0.644	0.248	0.526	0.654	0.795
	SDG (160)	22.63	0.650	0.263	0.548	0.679	0.801
	SDG (320)	28.38	0.610	0.553	0.795	0.878	0.947

Table 2. Quantitative evaluation of our proposed SDG with language guidance and comparison to prior work. The numbers in the brackets after “SDG” is the scaling factor. For FID, the lower, the better. For other metrics, the higher, the better.

in the supplementary material.

Retrieval accuracy to evaluate consistency with guidance. We use text-to-image retrieval or image retrieval by an original CLIP ResNet 50×16 model without finetuning to evaluate how well the generated images matches the guidance. For an image generated with text guidance, we randomly select 99 real images from the training set as negative images, and evaluate the text-to-image retrieval performance. Similarly, for an image synthesized with a reference image, we use the reference image to retrieve the generated image from the 99 randomly selected real images². As shown in Table 1 and Table 2, higher scaling factor generally leads to better retrieval performance, indicating that the generated images are more consistent with the guidance. StyleCLIP has a very high retrieval performance because the latent code optimization is based on the CLIP loss function, and the retrieval evaluation also uses the CLIP model to calculate the image-text similarity.

4.3. Qualitative Results

Text-guided and image-guided synthesis results Our model combines the language and image guidance in a uni-

²The selected negative images are disjoint with the guidance images we used for synthesizing images.

fied framework, and is easy to adapt to various applications. In Figure 3 we show the synthesis results with image content guidance (Equation 7). With the image guided diffusion, the model is able to synthesize new images with diverse structures that match the semantics of the guidance image. Figure 4 shows the language-guided diffusion results, where our model is able to handle complex and fine-grained descriptions, such as “A smiling woman with curly brown hair and lipstick.”, or “A bedroom with a wooden closet and a painting on the wall.” We can also incorporate language and image guidance jointly, as shown in Figure 5. The image and language guidance provide complementary information, and our semantic diffusion guidance is able to generate images that align with both.

Other applications In Fig. 6(a,b), we demonstrate the results of style (Equation 9) and structure-preserving (Equation 8) image guidance. With the style guidance, the model trained on LSUN bedroom is able to synthesize bedrooms in the unseen style of the reference image. With the structure-preserving content guidance, the synthesized images preserve the structure, pose, and layout information from the reference image. Fig. 6(c) shows that the model is able to take an out-of-domain image as guidance, and synthesize photo-realistic images which are semantically similar to the

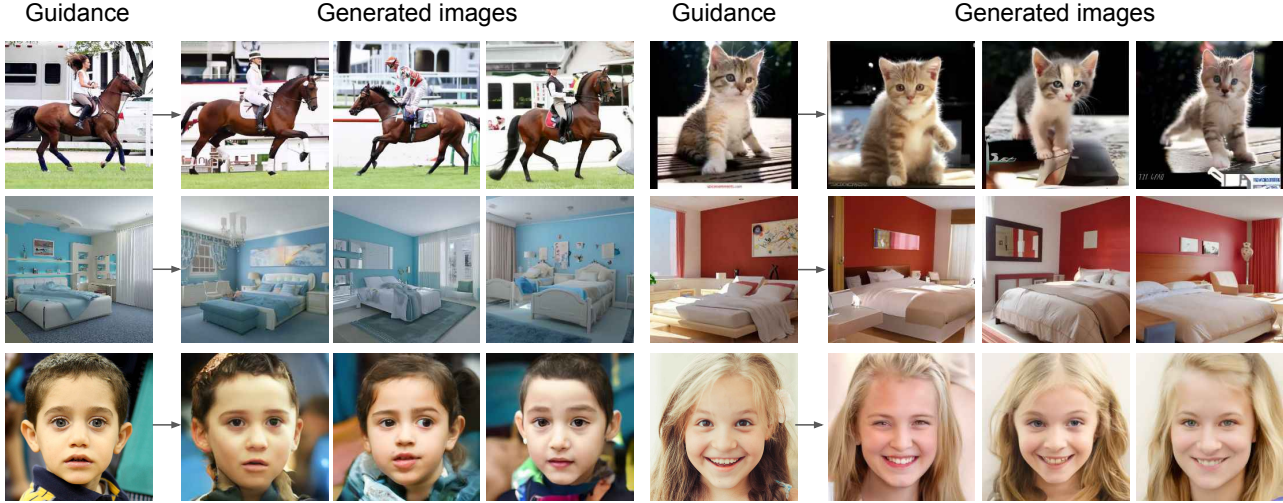


Figure 3. Image synthesis results with image content guidance on LSUN and FFHQ datasets. Given a guidance image, the model is able to generate semantically similar images with different pose, layout, and structure.



Figure 4. Image synthesis results with language guidance on LSUN and FFHQ datasets. Our model is able to generate images based on fine-grained language instructions.

guidance image.

Comparison to prior work Since there is no prior work that incorporates text and image guidance in the same unified framework, we compare our approach to previous text-guided and image-guided synthesis work. In image-guided synthesis, the most related to our work is ILVR [6]. As shown in Fig. 7(a), our model can generate images in different poses and structures, while ILVR can only generate

images of the same pose and structure. We compare our language-guided image synthesis with StyleCLIP. Although StyleCLIP is able to generate high-quality images, diversity is lacking in their results, while our model is able to generate high-quality and diverse results based on the language instruction.


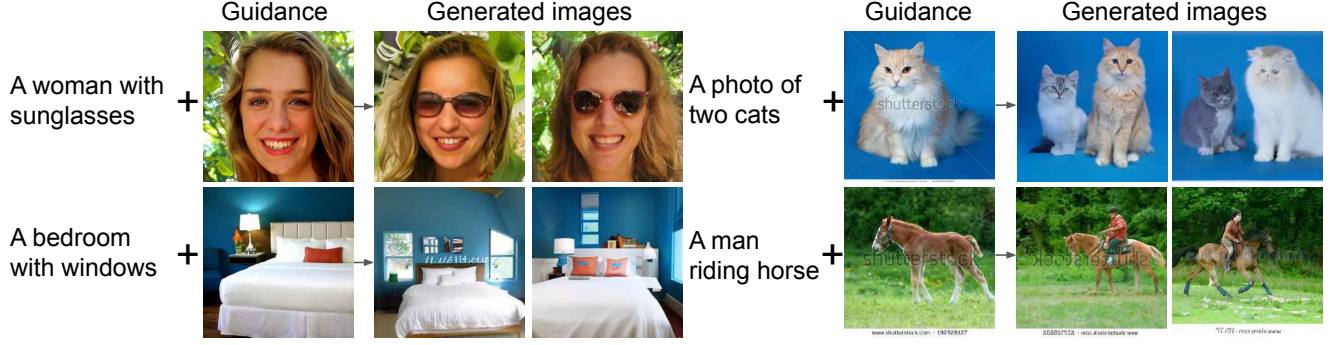


Figure 5. Image synthesis results with both image and language guidance. The image and language guidance provides complementary information, and our model generates images that matches both guidance.

(a) Style guidance



(b) Structure-preserving guidance

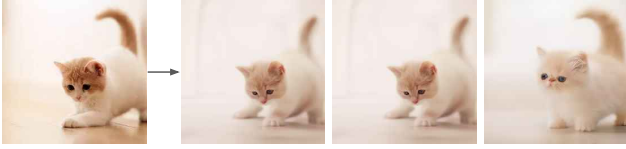

(c) Out-of-domain guidance images

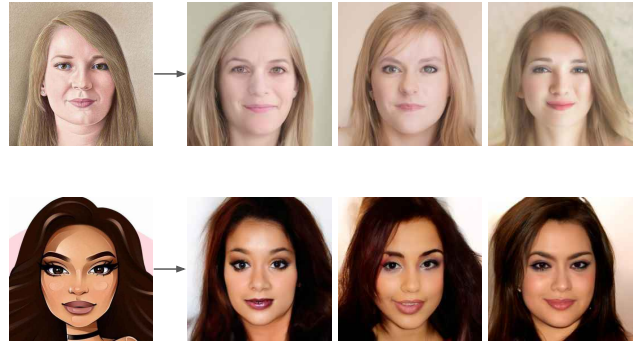


Figure 6. Different applications of our SDG model. (a) shows style-guided image synthesis. (b) shows structure-preserving image synthesis when the user does not want to generate diverse structures. (c) shows synthesizing realistic images with out-of-domain image guidance.

(b) Language guidance: A photo of a man with eyeglasses.

(a) Image guidance

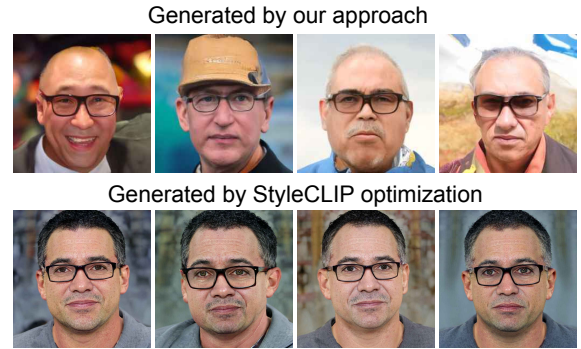
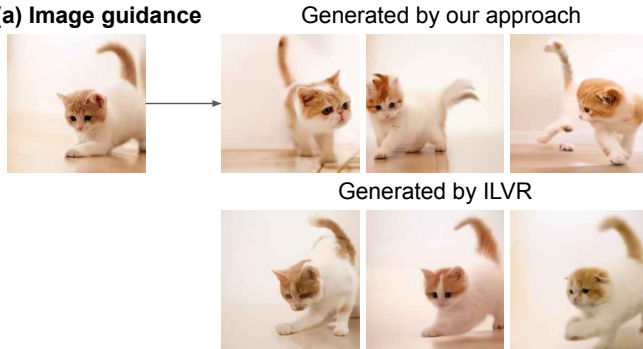


Figure 7. Comparison to previous work. Image-guided synthesis is compared with ILVR, and text-guided synthesis is compared to StyleCLIP.

5. Limitation and Social Impact

We propose Semantic Diffusion Guidance (SDG), a unified framework for language- and image-guided image synthesis. The semantic diffusion guidance is injected into pre-trained diffusion models without extra cost of re-training, and enables fine-grained control over image synthesis with image or language guidance, or both. A potential limitation

is that the language-guided generation may fail for complex scenes or complex language descriptions. Image generation have as much potential for misuse in application as they have for beneficial application. We should be aware of the potential negative social impact if image synthesis is used for generating fake images to mislead people. Please refer to the appendix for more discussion on limitations, failure cases, and potential negative social impacts.

References

- [1] Rameen Abdal, Yipeng Qin, and Peter Wonka. Image2stylegan: How to embed images into the stylegan latent space? In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4432–4441, 2019. 2
- [2] Samaneh Azadi, Matthew Fisher, Vladimir G Kim, Zhaowen Wang, Eli Shechtman, and Trevor Darrell. Multi-content gan for few-shot font style transfer. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7564–7573, 2018. 2
- [3] David Bau, Hendrik Strobelt, William Peebles, Jonas Wulff, Bolei Zhou, Jun-Yan Zhu, and Antonio Torralba. Semantic photo manipulation with a generative image prior. *ACM Transactions on Graphics (TOG)*, 38(4):59, 2019. 1
- [4] Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale gan training for high fidelity natural image synthesis. *arXiv preprint arXiv:1809.11096*, 2018. 1
- [5] Arantxa Csanova, Marlène Careil, Jakob Verbeek, Michal Drozdal, and Adriana Romero-Soriano. Instance-conditioned gan. *arXiv preprint arXiv:2109.05070*, 2021. 2
- [6] Jooyoung Choi, Sungwon Kim, Yonghyun Jeong, Youngjune Gwon, and Sungroh Yoon. Ilvr: Conditioning method for denoising diffusion probabilistic models. *arXiv preprint arXiv:2108.02938*, 2021. 2, 3, 5, 6, 7
- [7] Helisa Dharmo, Azade Farshad, Iro Laina, Nassir Navab, Gregory D Hager, Federico Tombari, and Christian Rupprecht. Semantic image manipulation using scene graphs. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5213–5222, 2020. 1
- [8] Prafulla Dhariwal and Alex Nichol. Diffusion models beat gans on image synthesis. *arXiv preprint arXiv:2105.05233*, 2021. 1, 3, 4, 5
- [9] Rinon Gal, Or Patashnik, Haggai Maron, Gal Chechik, and Daniel Cohen-Or. Stylegan-nada: Clip-guided domain adaptation of image generators. *arXiv preprint arXiv:2108.00946*, 2021. 2, 3, 5, 11
- [10] Leon A Gatys, Alexander S Ecker, and Matthias Bethge. Image style transfer using convolutional neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2414–2423, 2016. 2
- [11] Leon A Gatys, Alexander S Ecker, Matthias Bethge, Aaron Hertzmann, and Eli Shechtman. Controlling perceptual factors in neural style transfer. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 3985–3993, 2017. 2
- [12] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. *Advances in neural information processing systems*, 27, 2014. 2
- [13] Shuyang Gu, Congliang Chen, Jing Liao, and Lu Yuan. Arbitrary style transfer with deep feature reshuffle. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 8222–8231, 2018. 2
- [14] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems*, pages 6626–6637, 2017. 5
- [15] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *arXiv preprint arXiv:2006.11239*, 2020. 2
- [16] Xun Huang and Serge Belongie. Arbitrary style transfer in real-time with adaptive instance normalization. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 1501–1510, 2017. 2
- [17] Xun Huang, Ming-Yu Liu, Serge Belongie, and Jan Kautz. Multimodal unsupervised image-to-image translation. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 172–189, 2018. 2
- [18] Justin Johnson, Alexandre Alahi, and Li Fei-Fei. Perceptual losses for real-time style transfer and super-resolution. In *European conference on computer vision*, pages 694–711. Springer, 2016. 4
- [19] KJ Joseph, Arghya Pal, Sailaja Rajanala, and Vineeth N Balasubramanian. C4synth: Cross-caption cycle-consistent text-to-image synthesis. In *2019 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pages 358–366. IEEE, 2019. 2
- [20] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. *arXiv preprint arXiv:1812.04948*, 2018. 1
- [21] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4401–4410, 2019. 5
- [22] Nicholas Kolkin, Jason Salavon, and Gregory Shakhnarovich. Style transfer by relaxed optimal transport and self-similarity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10051–10060, 2019. 2
- [23] Bowen Li, Xiaojuan Qi, Thomas Lukasiewicz, and Philip HS Torr. Controllable text-to-image generation. *arXiv preprint arXiv:1909.07083*, 2019. 2
- [24] Chuan Li and Michael Wand. Combining markov random fields and convolutional neural networks for image synthesis. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2479–2486, 2016. 2
- [25] Xueting Li, Sifei Liu, Jan Kautz, and Ming-Hsuan Yang. Learning linear transformations for fast image and video style transfer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3809–3817, 2019. 2
- [26] Yijun Li, Chen Fang, Jimei Yang, Zhaowen Wang, Xin Lu, and Ming-Hsuan Yang. Universal style transfer via feature transforms. *arXiv preprint arXiv:1705.08086*, 2017. 2
- [27] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In *Proceedings of International Conference on Computer Vision (ICCV)*, December 2015. 5, 11
- [28] Chenlin Meng, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021. 3

- [29] Taesung Park, Ming-Yu Liu, Ting-Chun Wang, and Jun-Yan Zhu. Semantic image synthesis with spatially-adaptive normalization. *CVPR*, 2019. 1
- [30] Taesung Park, Jun-Yan Zhu, Oliver Wang, Jingwan Lu, Eli Shechtman, Alexei A Efros, and Richard Zhang. Swapping autoencoder for deep image manipulation. *arXiv preprint arXiv:2007.00653*, 2020. 2
- [31] Or Patashnik, Zongze Wu, Eli Shechtman, Daniel Cohen-Or, and Dani Lischinski. Styleclip: Text-driven manipulation of stylegan imagery. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2085–2094, 2021. 3, 5, 6
- [32] Tingting Qiao, Jing Zhang, Duanqing Xu, and Dacheng Tao. Mirrorgan: Learning text-to-image generation by redescription. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1505–1514, 2019. 2
- [33] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. *arXiv preprint arXiv:2103.00020*, 2021. 2, 3, 4, 5, 11, 12
- [34] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. *arXiv preprint arXiv:2102.12092*, 2021. 1, 2
- [35] Ali Razavi, Aaron van den Oord, and Oriol Vinyals. Generating diverse high-fidelity images with vq-vae-2. In *Advances in neural information processing systems*, pages 14866–14876, 2019. 2
- [36] Scott Reed, Zeynep Akata, Xinchun Yan, Lajanugen Logeswaran, Bernt Schiele, and Honglak Lee. Generative adversarial text to image synthesis. In *International Conference on Machine Learning*, pages 1060–1069. PMLR, 2016. 2
- [37] Scott E Reed, Zeynep Akata, Santosh Mohan, Samuel Tenka, Bernt Schiele, and Honglak Lee. Learning what and where to draw. *Advances in neural information processing systems*, 29:217–225, 2016. 2
- [38] Alon Shoshan, Nadav Bhonker, Igor Kviatkovsky, and Gerard Medioni. Gan-control: Explicitly controllable gans. *arXiv preprint arXiv:2101.02477*, 2021. 1
- [39] Yang Song and Stefano Ermon. Generative modeling by estimating gradients of the data distribution. *arXiv preprint arXiv:1907.05600*, 2019. 2
- [40] Yang Song and Stefano Ermon. Improved techniques for training score-based generative models. *arXiv preprint arXiv:2006.09011*, 2020. 2
- [41] Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020. 3
- [42] Ming Tao, Hao Tang, Songsong Wu, Nicu Sebe, Xiao-Yuan Jing, Fei Wu, and Bingkun Bao. Df-gan: Deep fusion generative adversarial networks for text-to-image synthesis. *arXiv preprint arXiv:2008.05865*, 2020. 2
- [43] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017. 2
- [44] Taihong Xiao, Jiapeng Hong, and Jinwen Ma. Elegant: Exchanging latent encodings with gan for transferring multiple face attributes. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 168–184, 2018. 1, 2
- [45] Tao Xu, Pengchuan Zhang, Qiuyuan Huang, Han Zhang, Zhe Gan, Xiaolei Huang, and Xiaodong He. Attngan: Fine-grained text to image generation with attentional generative adversarial networks. *CVPR*, 2018. 1
- [46] Tao Xu, Pengchuan Zhang, Qiuyuan Huang, Han Zhang, Zhe Gan, Xiaolei Huang, and Xiaodong He. Attngan: Fine-grained text to image generation with attentional generative adversarial networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1316–1324, 2018. 2
- [47] Fisher Yu, Ari Seff, Yinda Zhang, Shuran Song, Thomas Funkhouser, and Jianxiong Xiao. Lsun: Construction of a large-scale image dataset using deep learning with humans in the loop. *arXiv preprint arXiv:1506.03365*, 2015. 2, 5, 11
- [48] Han Zhang, Tao Xu, Hongsheng Li, Shaoqing Zhang, Xiaolei Huang, Xiaogang Wang, and Dimitris Metaxas. Stackgan: Text to photo-realistic image synthesis with stacked generative adversarial networks. *ICCV*, 2017. 1
- [49] Jiapeng Zhu, Yujun Shen, Deli Zhao, and Bolei Zhou. In-domain gan inversion for real image editing. In *European conference on computer vision*, pages 592–608. Springer, 2020. 1
- [50] Minfeng Zhu, Pingbo Pan, Wei Chen, and Yi Yang. Dm-gan: Dynamic memory generative adversarial networks for text-to-image synthesis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5802–5810, 2019. 2

A. Implementation Details

A.1. Dataset Licenses

The images in LSUN dataset [47] (<https://www.yf.io/p/lsun>) are obtained by Google Image Search with Creative Commons licenses. The images of FFHQ dataset [9] (<https://github.com/NVlabs/ffhq-dataset>) are published in Flickr by their respective authors under either Creative Commons BY 2.0, Creative Commons BY-NC 2.0, Public Domain Mark 1.0, Public Domain CC0 1.0, or U.S. Government Works license. The FFHQ dataset itself (including JSON metadata, download script, and documentation) is made available under Creative Commons BY-NC-SA 4.0 license by NVIDIA Corporation.

A.2. Model and Training Details

We adopt diffusion models pretrained on LSUN dataset from <https://github.com/openai/guided-diffusion> and diffusion models pretrained on FFHQ dataset from https://github.com/jychoi118/ilvr_adm for our SDG experiments. We finetune CLIP ResNet 50×16 model [33] (<https://github.com/openai/CLIP>) on the noisy images with initial learning rate 10^{-4} and weight decay 10^{-3} , with a batch size of 256. On FFHQ dataset, the learning rate decays by a factor of 0.1 every 3,000 iterations, and the model is trained for 14,000 iterations. On LSUN cat, LSUN horse, and LSUN bedroom datasets, the learning rate decays by a factor of 0.1 every 30,000 iterations, and the model is trained for 100,000 iterations. When synthesizing images with our SDG, the scaling factor is a hyperparameter that we manually adjust for each guidance. Code will be released upon acceptance.

A.3. Text Instructions for Evaluating Text-to-Image Synthesis

In Section 4.2 of the main paper, we evaluate text-to-image synthesis with 400 text instructions for FFHQ face images. The text instructions are defined based on compositions of gender and face attributes from CelebA-Attributes [27]. We provide detailed information on how to generate the 400 text instructions. The sentence is in the structure of “A photo of {a / a chubby / a smiling / an attractive} {man / woman / girl / boy} with {attribute}”, where *attribute* is one of the following: bags under eyes, big lips, big nose, black hair, blond hair, brown hair, red hair, bushy eyebrows, double chin, eyeglasses, high cheekbones, slightly open mouth, narrow eyes, oval face, pale skin, pointy nose, rosy cheeks, a hat, short hair, straight hair, curly hair. Additionally, we define 9 attributes specifically for women: arched eyebrows, bangs hair, heavy sunglasses, wavy hair, earrings, lipstick, necklace, long hair, bob-style hair; 5 attributes specifically for men: goatee, mustache, no beard, sideburns, necktie; and 1 attribute “gray hair” for

both men and women. The compositions of the above descriptions, genders, and attributes result in 400 unique text instructions.

B. Perceptual Evaluation

We conduct a perceptual evaluation on the semantic consistency and perceptual quality of generated images using Amazon Mechanical Turk.

B.1. Perceptual Evaluation Setup

To evaluate image guidance, we select 10 guidance images for each of the four datasets, and generate 10 images based on each guidance image, which results in 100 generated images for each dataset. As a comparison, we use the same diffusion model to generate 100 images with the same random seed but without SDG.

To evaluate text guidance, we select 10 guidance texts for FFHQ dataset, and 5 guidance texts for each of the LSUN cat, LSUN horse, and LSUN bedroom datasets. Similarly, the model generates 10 images based on each guidance text, and we generate the same number of images with the same model and random seed but without SDG for comparison.

B.2. Perceptual Evaluation Metrics

Semantic Consistency We first evaluate the semantic consistency between the generated images and the text or image guidance. In each assignment, the worker is given the generated image and the guidance image or text at the same time and asked, “Does the generated image matches the guidance image/text?”. There are three candidate answers for the question: “Yes”, “No”, and “Cannot determine”. We have 3 workers to answer each question, and calculate the average percentage of the answer “Yes” among all answers excluding “Cannot determine”. For example, we get 30 answers for 10 questions, among which there are 15 “Yes”, 10 “No”, and 5 “Cannot determine”. Then the average percentage of images that are semantically consistent with the guidance is $15 / (15 + 10) = 0.6$. As shown in Table 3, the semantic consistency of images generated with SDG is much higher than the random sampling baseline without SDG.

Perceptual Quality We then evaluate the perceptual quality of images generated with and without SDG. We design the tasks by pairing the two images generated with the same model and random seed, but with and without SDG. The workers are provided the paired images and asked, “Which image is more realistic and has better quality?”. There are three candidate answers for the question: “image generated with SDG is better”, “image generated without SDG is better”, and “Cannot determine”. We have 3 workers to answer each question, and calculate the average percentage of the answer “image generated with SDG is better” among all answers excluding “Cannot determine”. The results shown in Table 3 indicates that the images generated with SDG have

		Semantic Consistency w/ SDG (ours)	Semantic Consistency w/o SDG (baseline)	Perceptual Quality w/ SDG better than w/o SDG
FFHQ	Image Guidance	0.611	0.088	0.565
	Text Guidance	0.812	0.346	0.348
LSUN Cat	Image Guidance	0.758	0.055	0.646
	Text Guidance	0.975	0.341	0.578
LSUN Horse	Image Guidance	0.852	0.141	0.607
	Text Guidance	0.941	0.352	0.496
LSUN Bedroom	Image Guidance	0.369	0.107	0.574
	Text Guidance	0.921	0.472	0.418

Table 3. Perceptual evaluation of our proposed SDG with SDG image guidance or text guidance and comparison to baseline without SDG.

similar perceptual quality as the images generated by the baseline without SDG. The image quality with text guidance is worse than the image quality without guidance for FFHQ and LSUN bedroom datasets. We argue that this is because the text instructions defined by us may not perfectly match the distribution of the original dataset. There might be some instructions with semantics that does not commonly appear in the training set, leading to the degradation of generated image quality in those scenarios.

C. Qualitative Results

We show more examples of images generated by our SDG model with image guidance (Figure 8) and language guidance (Figure 9). Our model is able to generate diverse images that semantically match the guidance signal. In Figure 10 we illustrate multimodal guidance, where both image and language guidance are provided. The model is able to generate images that are semantically consistent with both guidance signals. In the last three rows of Figure 10, we demonstrate that the model is able to take out-of-domain images as guidance, and generate real images according to the semantic guidance.

D. Effect of Different Scale Factors

As explained in Section 3.1 and Algorithm 1 of the main paper, there is a user-controllable scaling factor s that controls the diversity and semantic consistency of the synthesized images. We illustrate the effect of the scaling factor in Figure 11, where each row shows images synthesized by a fixed scaling factor, and each column shares the same random seed for sampling during the generation process. As the scaling factor becomes larger, the consistency between generated images and the guidance signal becomes better, while the diversity of generated images becomes lower.


E. Limitations and Failure Cases

Figure 12 shows a failure case of our SDG model. When facing novel compositions of concepts that are not common in the training set, the model might have a difficulty dis-

entangling different concepts. As shown in the example, given the language instruction “A photo of a bedroom with yellow curtains”, the model generates images of bedrooms with yellow bed or yellow walls. Better vision-language embedding models, language-guided masking or attention schemes, and compositional image synthesis models may hopefully address this problem.

F. Social Impact

Our Semantic Diffusion Guidance (SDG) model can help designers and artists design arts or generate images as desired in a controllable way. The image guidance and language guidance provides a simple and intuitive interface for users. However, image synthesis models have as much potential for misuse in applications as they have for beneficial applications. We should be aware of the potential negative social impact if image synthesis is used for generating fake images, fake videos, or fake news to mislead people. Especially, we should be cautious about using the image synthesis models for face synthesis. In addition, the CLIP [33] model used in our language diffusion guidance is pretrained on large-scale image-caption pairs from the web, which might encodes undesired biases that could propagate to our image synthesis process. Researchers should be aware of the potential biases encoded by the pretrained CLIP model.

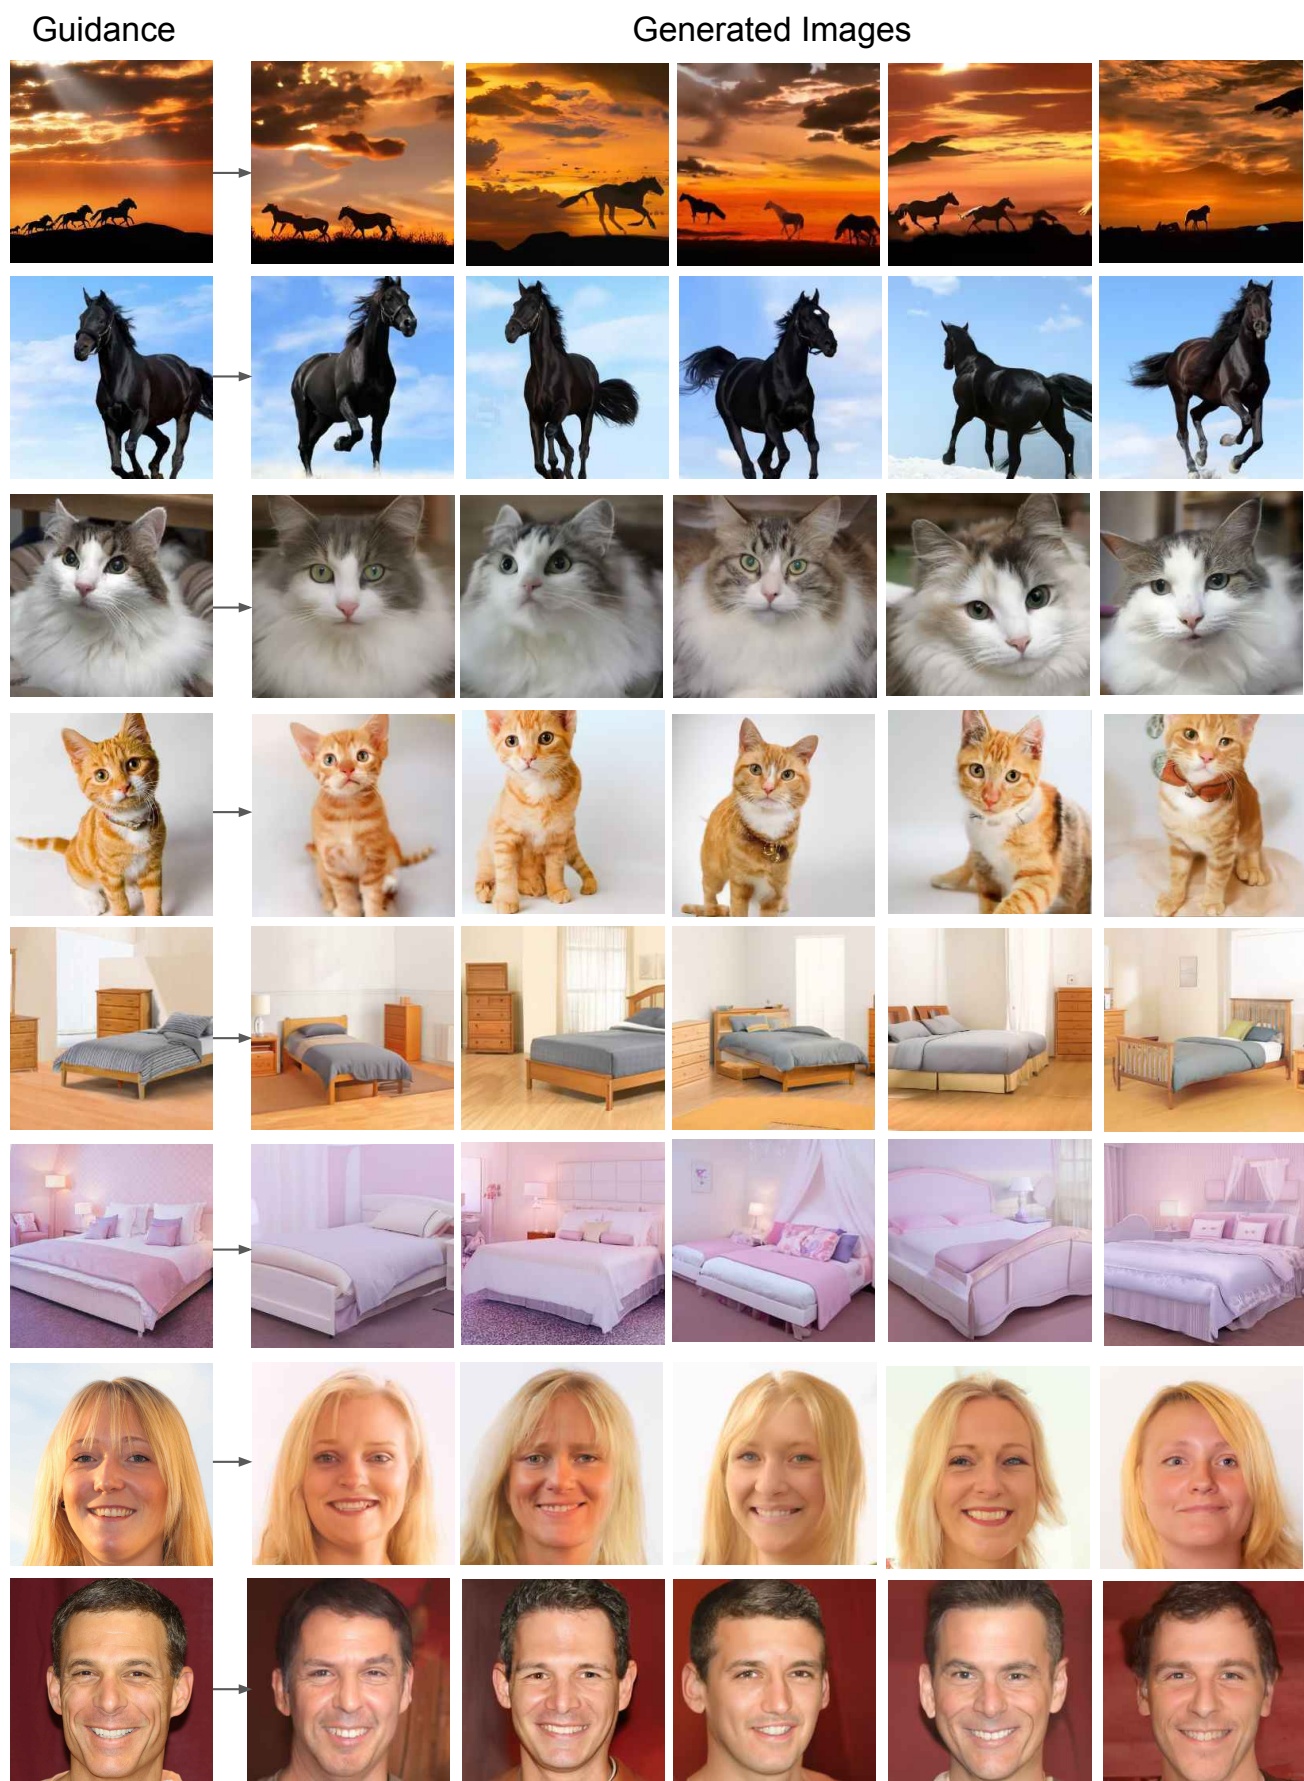

13
 Figure 8. Image synthesis results with image guidance on LSUN and FFHQ datasets. Given a guidance image, the model is able to generate semantically similar images with different pose, layout, and structure.


A photo of a girl with short hair.



A photo of a chubby man with double chin.



A photo of a man with slightly open mouth.

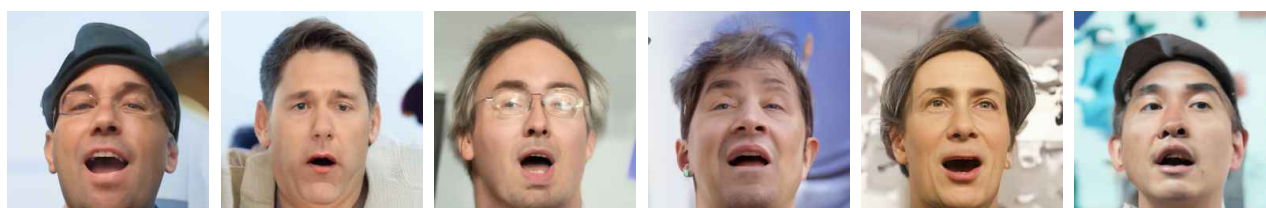

A photo of a cat with blue eyes.



A photo of a gray cat.



A photo of a bedroom with white curtains.



A photo of a bedroom with red walls.



Figure 9. Image synthesis results with language guidance on LSUN and FFHQ datasets.

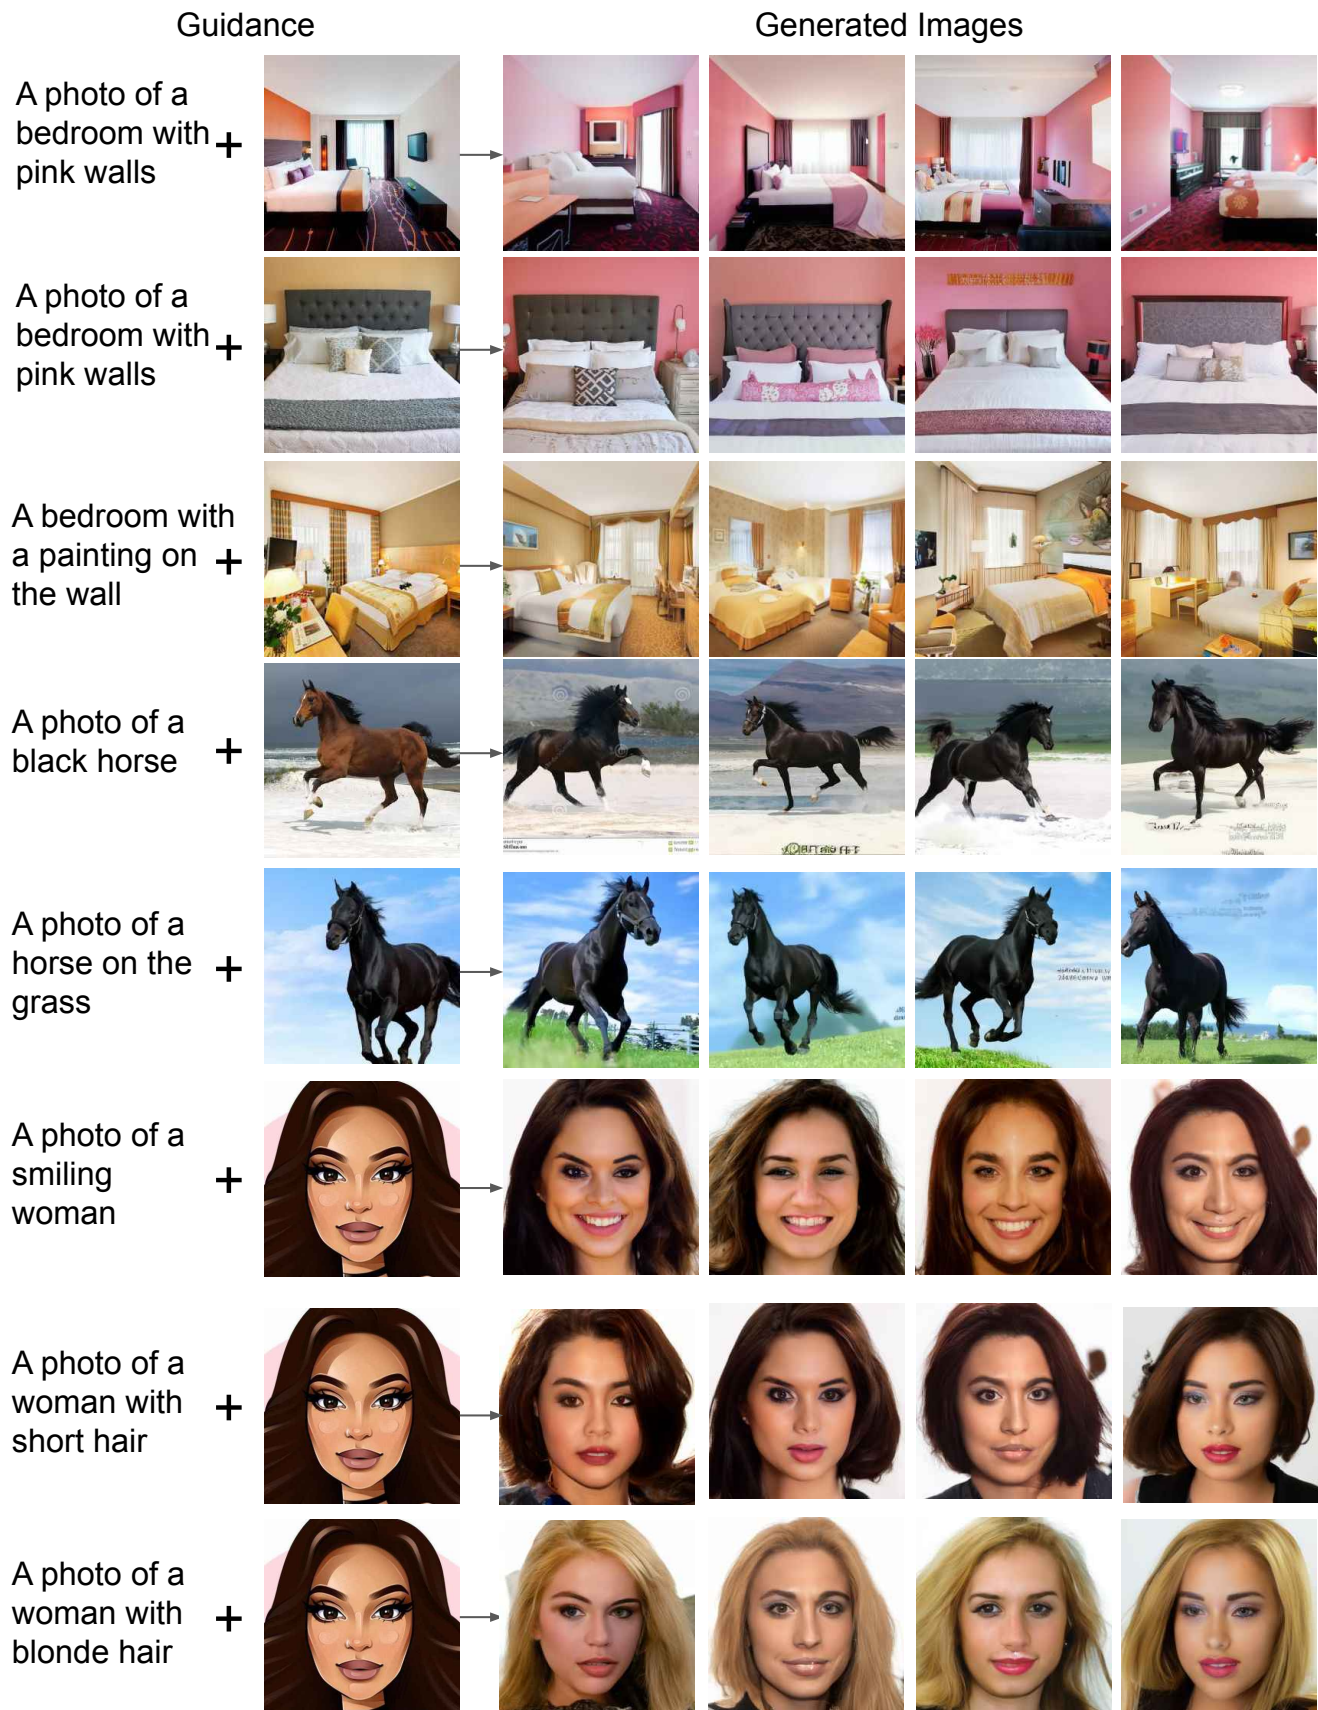


Figure 10. Image synthesis results with both image and language guidance on LSUN and FFHQ datasets.

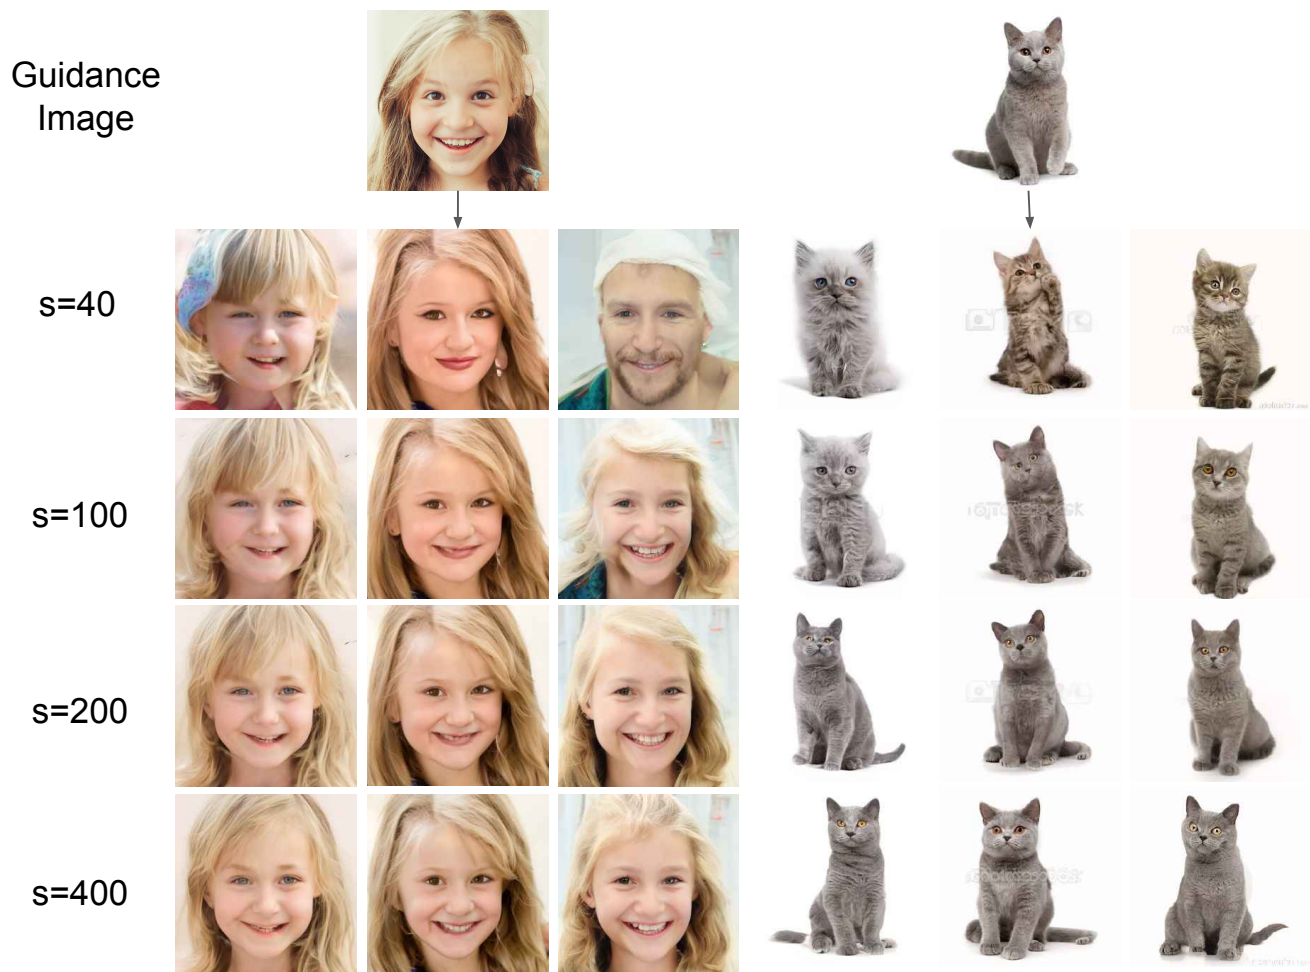


Figure 11. Image synthesis results with different scaling factors. s denotes the value of the scaling factor. Larger scaling factors result in lower diversity and more consistency with the guidance. The generated images in the same column share the same random seed for sampling.

A photo of a bedroom with yellow curtains.

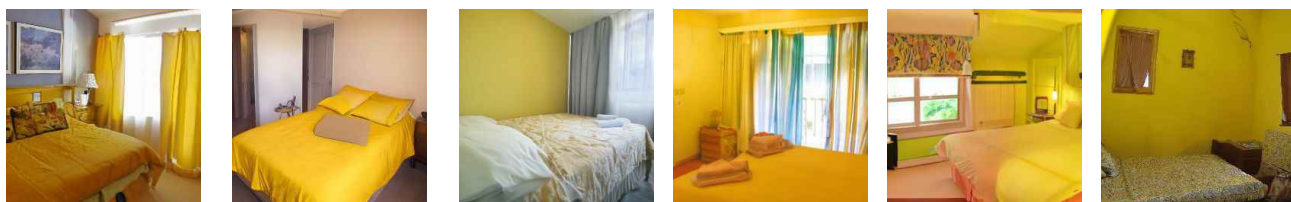


Figure 12. Failure cases of our SDG model.